

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 35, Township 138N, Range 30W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On 05/24/78 found a 3/4" pipe (down 0.4 feet)
DATE

left monument as found, lowered monument, removed monument (explain)

On 07/21/78 placed a cast iron monument stamped Minn. Hwy. Monument
DATE
over 3/4" pipe

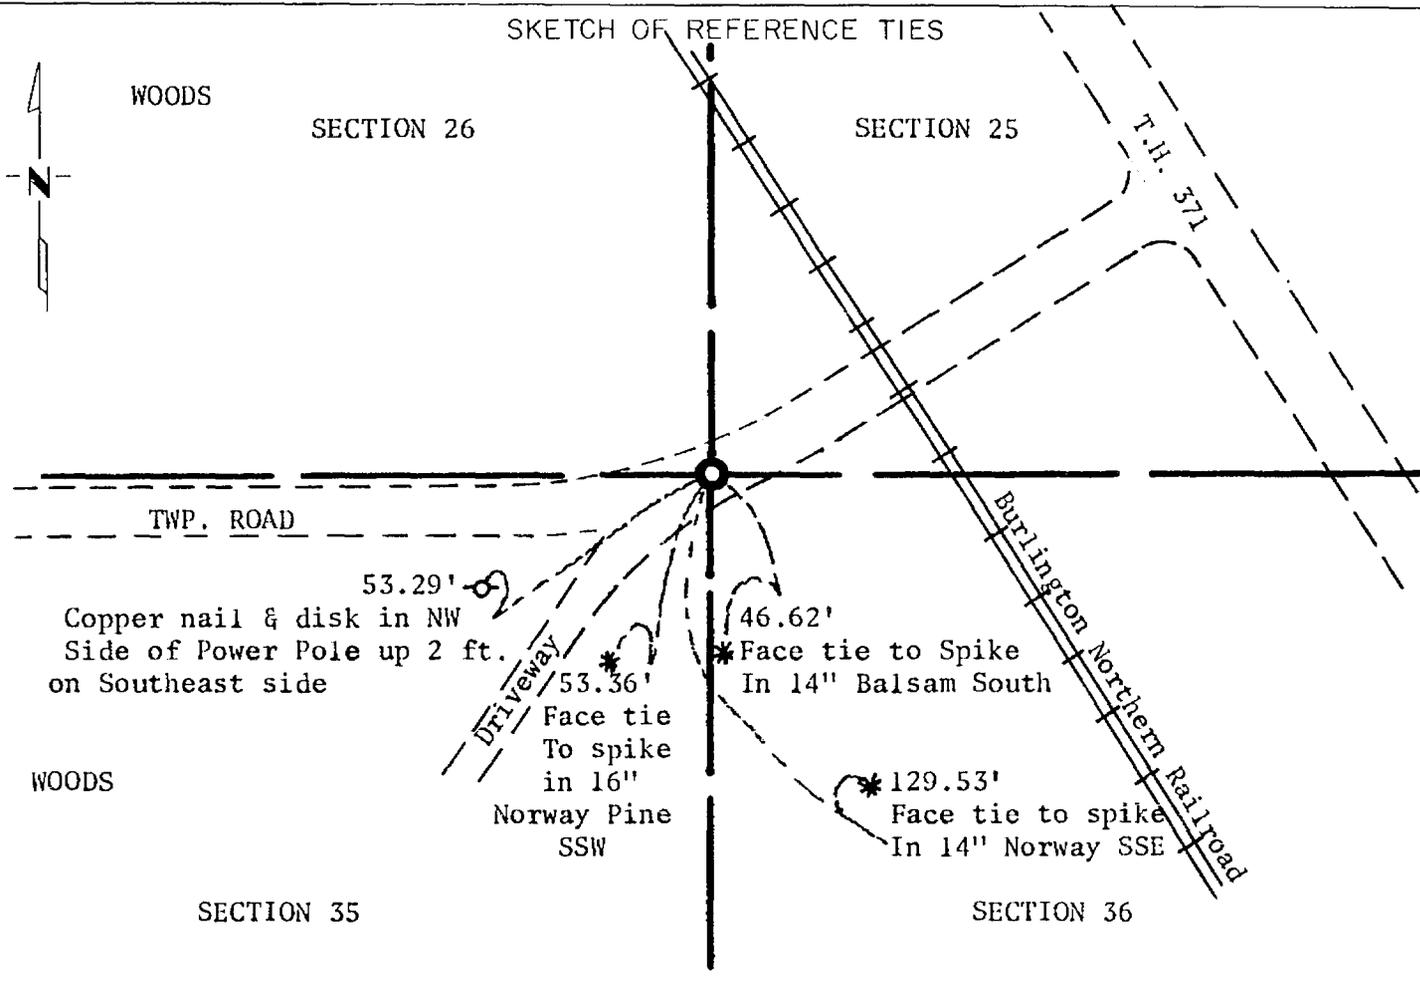

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Alphonse P. Welle 7/31/78
SIGNATURE DATE

Registration No. 11873

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 14 day of August A.D., 19 78

County Recorder Bentah Hendrickse
 By ee, Deputy

DOCUMENT NO. 240557 **MICROFILM**

Statement of Evidence: Northeast Corner Section 35, Township 138 North,
Range 30 West, 5th Principal Meridian.

The Original Government Survey was run in 1865 by Mr. George B. Wright and a wood post was set to mark the corner.

In 1926 Mr. H.E. Palmer of the Minnesota Highway Department found a capped iron pipe at this corner. No history could be found on this corner, but Mr. John Curo, Cass County Surveyor, did much work in this area from 1906 to 1915. This is the type of monument normally set by Mr. Curo and his notes in the area indicate his care in resetting corners at their original location.

In 1965 the Minnesota Highway Department tied in a 1½" capped iron to T.H. 371.

In 1966 Mr. R.F. Schneider, Cass County Surveyor, tied in a 1" iron pipe at this location.

In 1970 Mr. Dean Anderson, R.L.S., used this corner for some preliminary survey work.

In 1978 the Minnesota Department of Transportation recovered a 3/4" iron pipe. This pipe agrees with the 1926, 1965 and 1966 ties to the corner. The Department lowered the pipe and placed a cast iron monument over the lowered pipe. The monument is 37.2 feet Southwest of the railroad centerline as measured at right angles to the tracks and 4 feet North of the centerline of the Township Road.

For details and survey analysis contact the Minnesota Department of Transportation District Surveys Office in Brainerd.