

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 26, Township 138N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 05/24/78 found a ½" capped pipe R.L.S. 3091 (down 0.2 feet) over 2½"
DATE
capped pipe
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

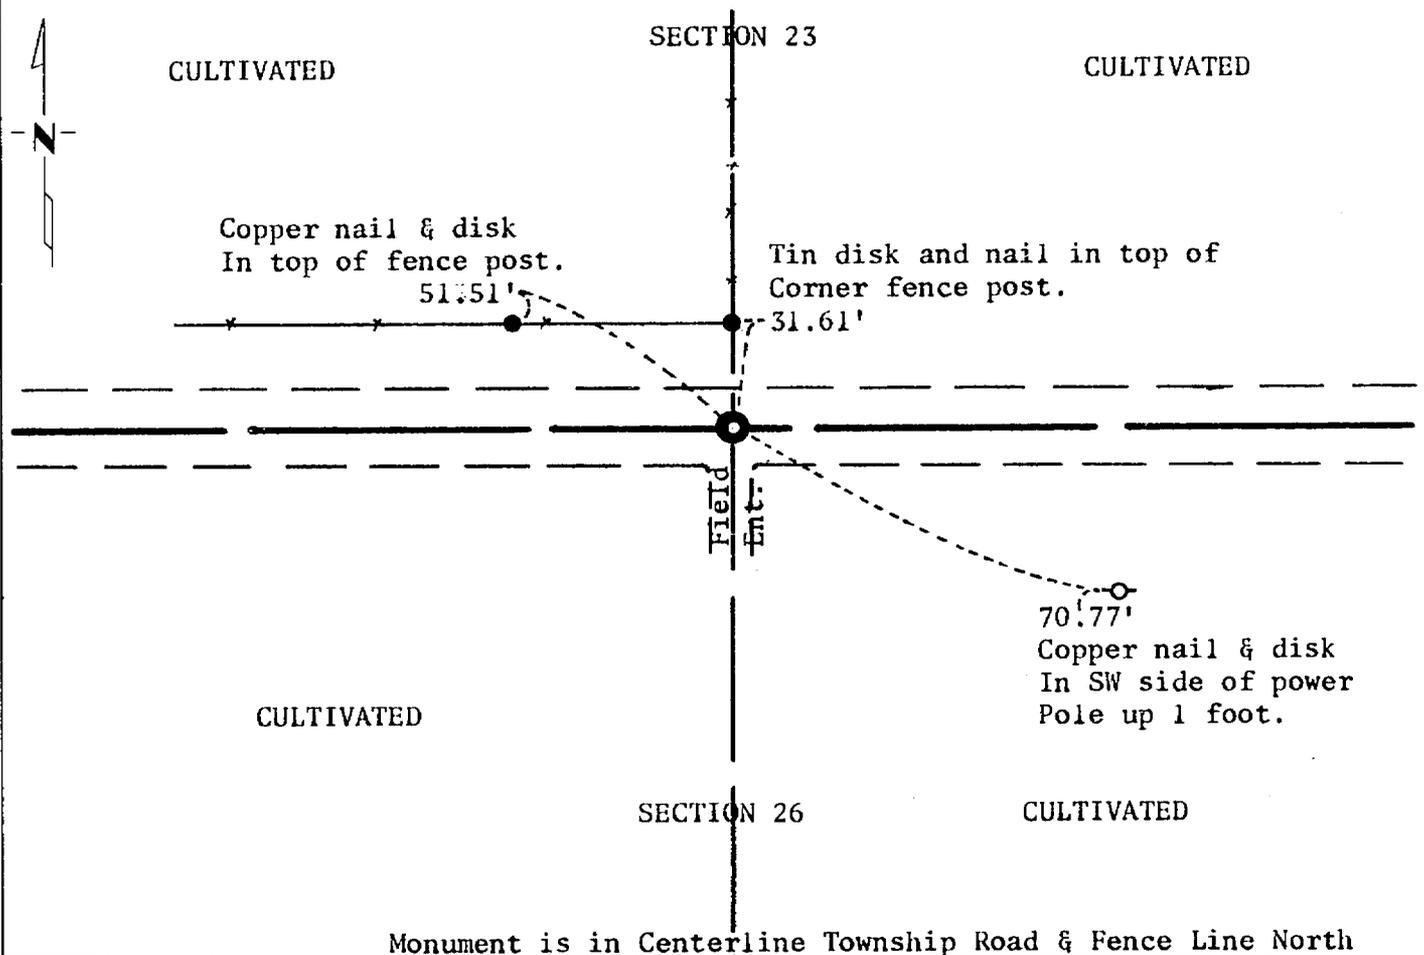

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Alphonse P. Wille 7/31/78
SIGNATURE DATE

Registration No. 11873

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 14 day of August A.D., 19 78

County Recorder Beulah Hendrichs

By le, Deputy

DOCUMENT NO. 240559 **MICROFILM**

Statement of Evidence: North Quarter Corner of Section 26, Township 138 North,
Range 30 West, 5th Principal Meridian.

The Original Public Land Survey was run in 1865 by Mr. George B. Wright and a wood post was set to mark the corner.

In 1907 Mr. John Curo, Cass County Surveyor, set a 2½" capped pipe at the original location from the original bearing trees.

In 1970 Mr. Dean Anderson, RLS, recovered Mr. Curo's pipe and set a ¾" capped pipe over Mr. Curo's pipe.

In 1978 the Minnesota Department of Transportation recovered Mr. Anderson's pipe and field ties.

For details and survey analysis contact the Minnesota Department of Transportation District Surveys Office in Brainerd.