

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter _____ Corner of Section 24, Township 145, Range 29, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a see statement of evidence
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/6/81 placed a 20" cast iron monument 2" above surface at
DATE
apparent fence corner

SKETCH OF REFERENCE TIES

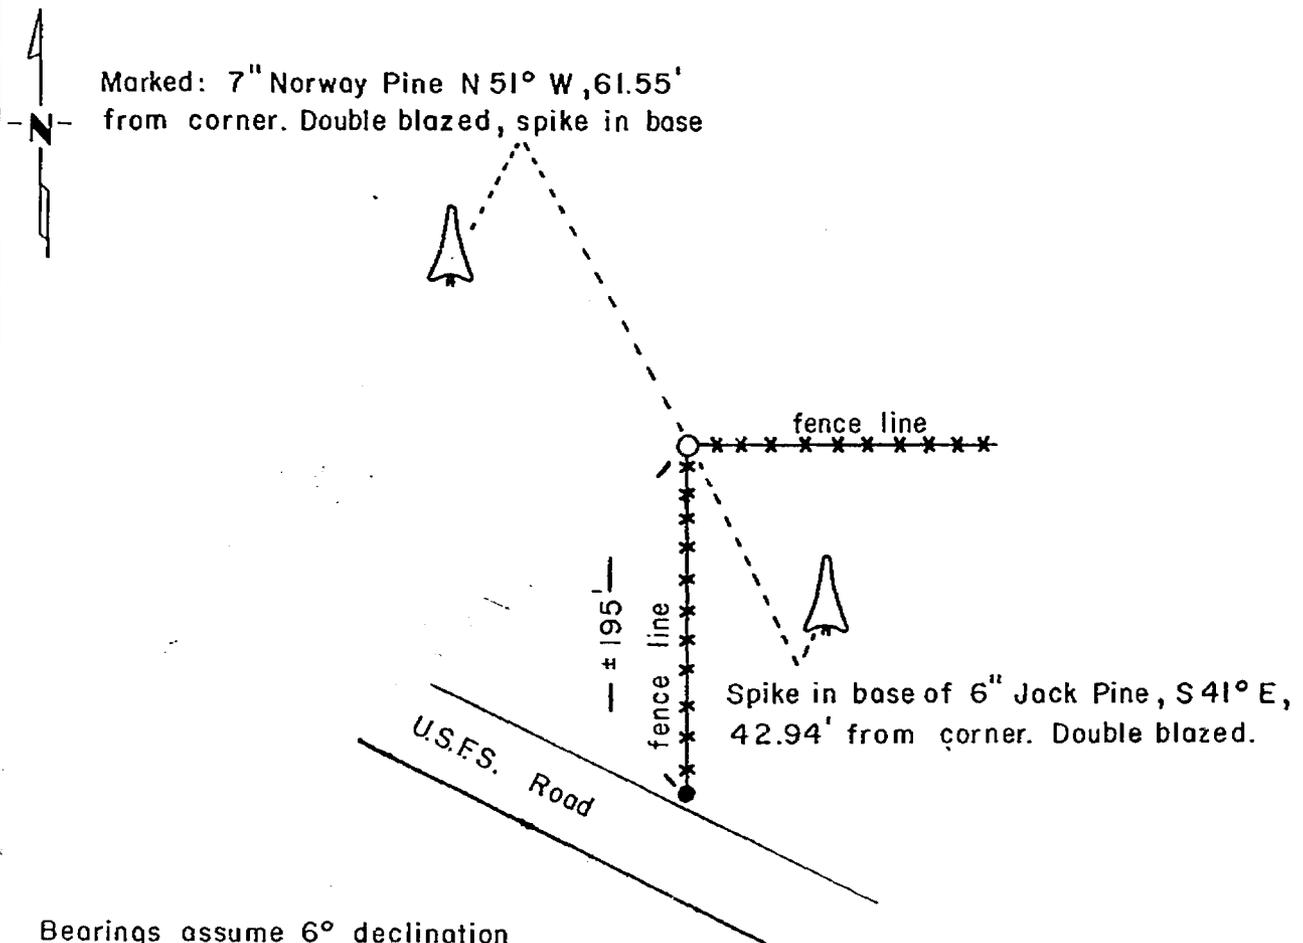

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald D Claypool 7/14/81
SIGNATURE DATE

Registration No. 13298

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

260585
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:05 A.M. on the 3 day of Dec. A.D., 1981

County Recorder Benedict Handrick
By MS, Deputy

DOCUMENT NO. 260585

MICROFILM

Statement of Evidence:

- 1874 - P.F. Conger, U.S. Deputy Surveyor, ran the range line between Range 28 West and Range 29 West. He set a post to mark the corner and two bearing trees as accessories; a Jack Pine 7 inch North $13\frac{1}{2}$ degrees East 24 links and a Norway Pine 24 inch South 74 degrees West 73 links.
- 1968 - W.H. Okerman, U.S. Forest Surveyor, set a capped pipe and accessories to mark this corner. The corner was set lost by single proportionate measurement.
- 1979 - Bert Eveland, Mn/DNR surveyor, surveyed for state lands in section 18. He determined there was a problem with corner positions on the Range Line between section 19 and 24, and 18 and 13. No conclusive agreements were reached.
- 1981 - David D. Claypool Land Surveying, subdivided section 24 for the Bug School Site. In making an analysis of the subdivision of sections East of the Range Line by U.S. Corps of Engineers and the Mn/DNR along with measurements by myself in sections 13 - 24 - 25 - 23 and 26, it appeared that the fence corner south and west of the lost position would provide a better position by obliterated methods. A meeting was held by Bert Eveland, Mn/DNR surveyor, Gary Stevenson, Cass County Surveyor, and Mike Hayes, U.S.F.S. and David Claypool R.L.S. It was agreed that P.F. Conger had not run his original line completely and that the fence corner would most likely be a better position. The error on the East Line of section 24 most likely would fall in the North $\frac{1}{2}$ mile and then be more compatible with the sections to the East and West.