


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH QUARTER Corner of Section 33, Township 441 N, Range 31 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9/25/84 found a 1 1/2 inch iron pipe, up 24 in. leaning to the East
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11/29/84 placed a 2 1/2 inch by 5 foot long galvanized pipe with 3 inch
DATE
brass cap, stamped as shown, up 14 inches.

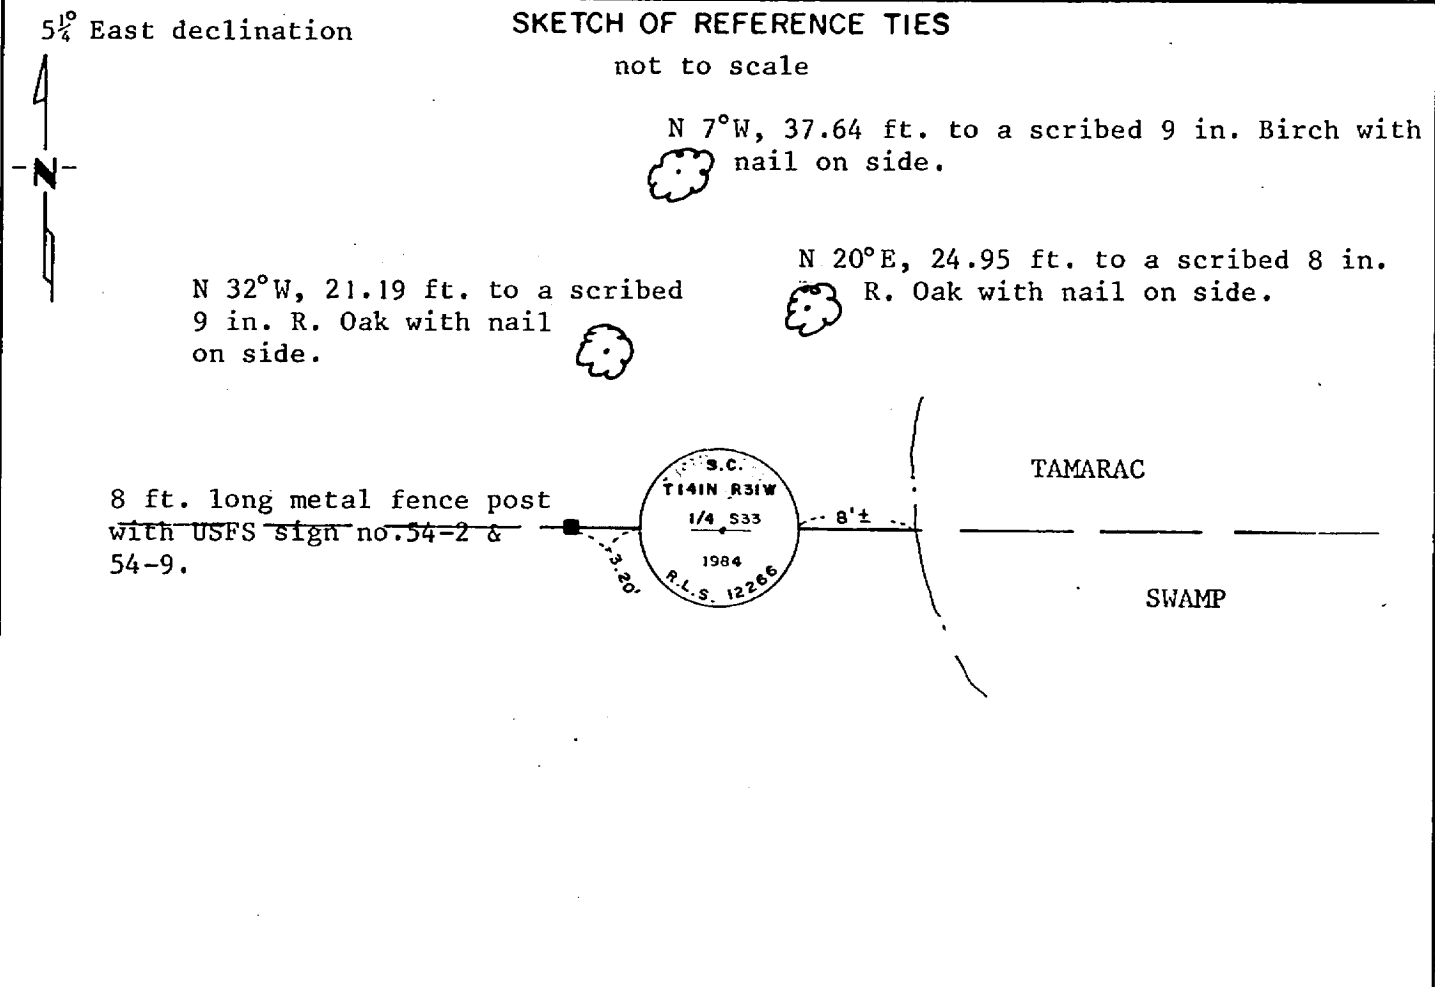

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony E. Kerich 12/12/84
SIGNATURE DATE

Registration No. 12266

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

280503
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:40 A.M. on the 25 day of February A.D., 19 85

Register of Deeds Claudine Kayler
By MS Deputy

DOCUMENT NO. 280503

Statement of Evidence:

SOUTH QUARTER CORNER OF SECTION 33, TOWNSHIP 141 NORTH,
RANGE 31 WEST OF THE 5th PRINCIPAL MERIDIAN.

1864 - The original Public Land Survey was run by Johnson and Thornton. Set a wood post to mark the corner and recorded two bearing trees as accessories:

6" W. Pine N 69°W 13 links (8.58')
4" W. Pine N 08°E 23 links (15.18')

1984 - Kerick Surveying, Inc., Bemidji, MN. ran the South line of Section 33 for the U.S. Forest Service. The only records available were the original survey. We found no trace of the original corner or its accessories. Found a 2" iron marking the corner. I contacted Walter Curo R.L.S. from Hackensack MN. he did a survey in Section 32 he also stated he had records from his grand father John Curo that he set the 2" iron from evidence he found back around 1910. I accepted this corner as a perpetuation of the original corner for lack of any better evidence. John Curo's records are not available to me so I am not disputing the position for this corner, even if this corner is not a perpetuation of the original corner I would still accept its position. Found no other accessories to the corner, set new corner accessories that appear on this certificate. I set a U.S.F.S. 3 inch brass capped monument in place of the 2" iron and reset 2" iron on East side of Monument.