


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South one quarter Corner of Section 24, Township 145N, Range 29W, 5th P.M.
STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____ see statement of evidence
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 5/6/81 placed a 20" cast iron monument
DATE

SKETCH OF REFERENCE TIES

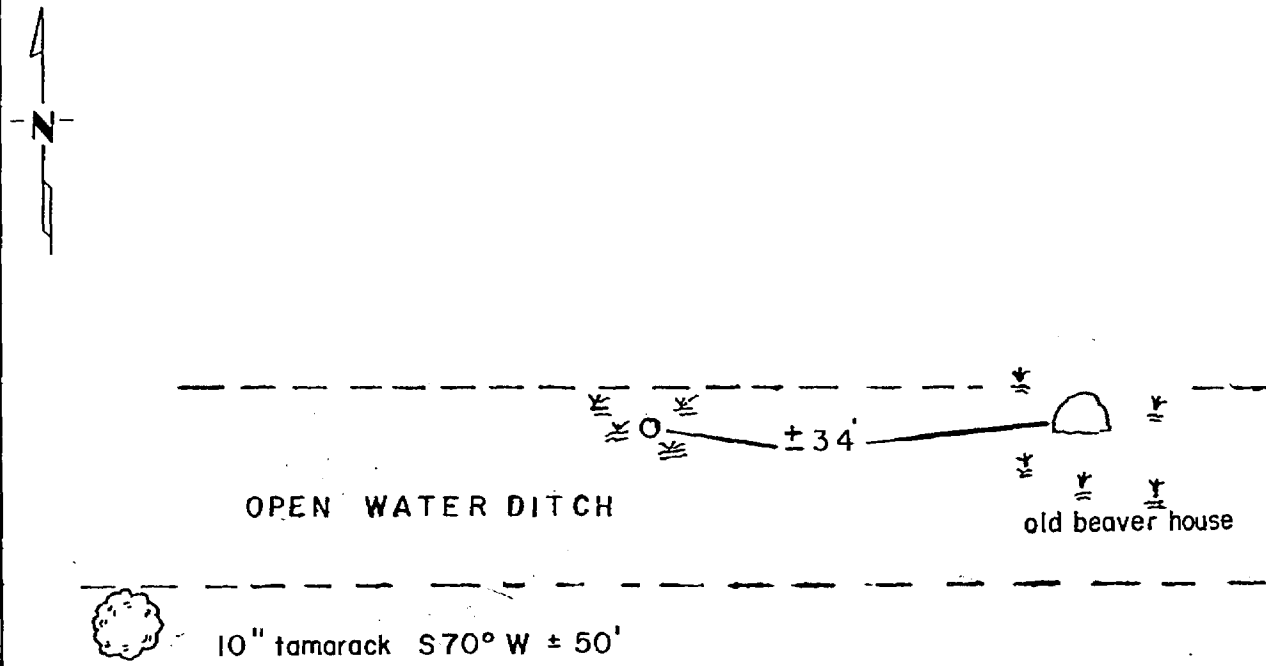

bearings assume 6° declination

Statement of evidence relative to this corner location is on back of page.

260590

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David D Claypool 7/14/81
SIGNATURE DATE

Registration No. 13298

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 3 day of Dec. A.D., 1981

County Recorder Beulah Herdrich

By MS, Deputy

DOCUMENT NO. 260590

Statement of Evidence:

- 1874 - P.F. Conger, U.S. Deputy Surveyor, subdivided the Township. He set a post to mark the corner and two bearing trees as accessories; a Cedar 5 inch South 28 degrees West 28 links and a Tamarack 6 inch North 38 degrees East 28 links.
- 1914 - J.A. Doney, Forest Ranger, found two bearing trees, a Tamarack 14 inch in section 24 and a Cedar 8 inch in section 25.
- 1974 - Charles E Akin Jr, U.S. Cadastral Surveyor, BLM, subdivided section 25. He found no evidence of the original corner and computed lost position. He did not monument this corner.
- 1981 - David D. Claypool Land Surveying, subdivided section 24. No evidence of the corner was found and it was set by lost methods according to computations of the BLM survey of 1974.