

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Reference to  
Meander #5 Corner of Section 22&27, Township 142, Range 27, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1/5/81 found a 1 1/2" iron pipe set by R.F. Schneider for the record plat of IN THE WILDS.  
DATE  
 left monument as found,  lowered monument,  removed monument (explain)
- On 10/27/81 placed a 2" x 60" iron pipe with marked 3" brass cap in place of found pipe.  
DATE

### SKETCH OF REFERENCE TIES

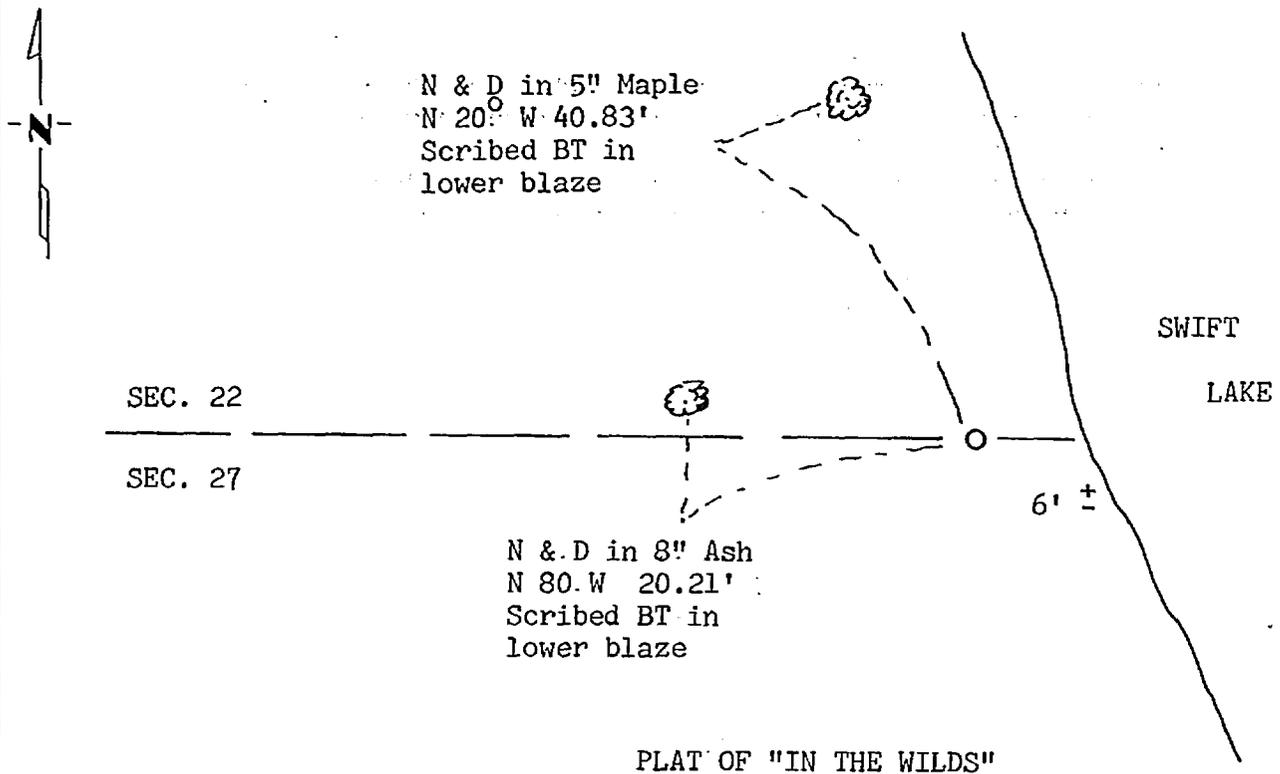

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 260600

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Atkinson 12-2-81  
SIGNATURE DATE

Registration No. 12684

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:20 A.M. on the 3 day of Dec. A.D., 1981

County Recorder Bessie Hardin  
 By MS, Deputy

DOCUMENT NO. 260600

Statement of Evidence:

- 1873 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 5" Ash S 13 W 12 links and 6" Basswood N 70 W 6 links.
- 1980 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1980 U.S. Forest Service office in Cass Lake was contacted for information. No resurvey information was found on this corner.
- 1971 R.F. Schneider, RLS, ran north line of Section 27 and found no evidence of this corner. Evidence of the section line from the NE corner of Sec. 27 west to Swift Lake was found. Based on this information, he established the section line from the NW corner of Sec. 27 east to Swift Lake. The plat of IN THE WILDS was then surveyed and filed by R.F. Schneider.
- 1981 We traversed the north line of Section 27 and found the shore pipes set by R.F. Schneider for the north line on the east and west shores of Swift Lake. No evidence of the original meander corners was found. Therefore, I accepted the method used by Schneider to reestablish the section line. I replaced the iron pipe shown on the record plat of IN THE WILDS as the shore pipe on the north line of Lot 1, Block One with a USFS monument. I marked the monument as a reference to the meander corner. It is not the true meander corner, but only marks the north line of Section 27. The proportion position of the meander corner falls in Swift Lake.