

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CW 1/16 Corner of Section 12, Township 141, Range 28, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-22-81 placed a 1 1/4" x 36" iron pipe for the CW 1/16 corner on
DATE line and at halfway point between W 1/4 and C 1/4.

SKETCH OF REFERENCE TIES

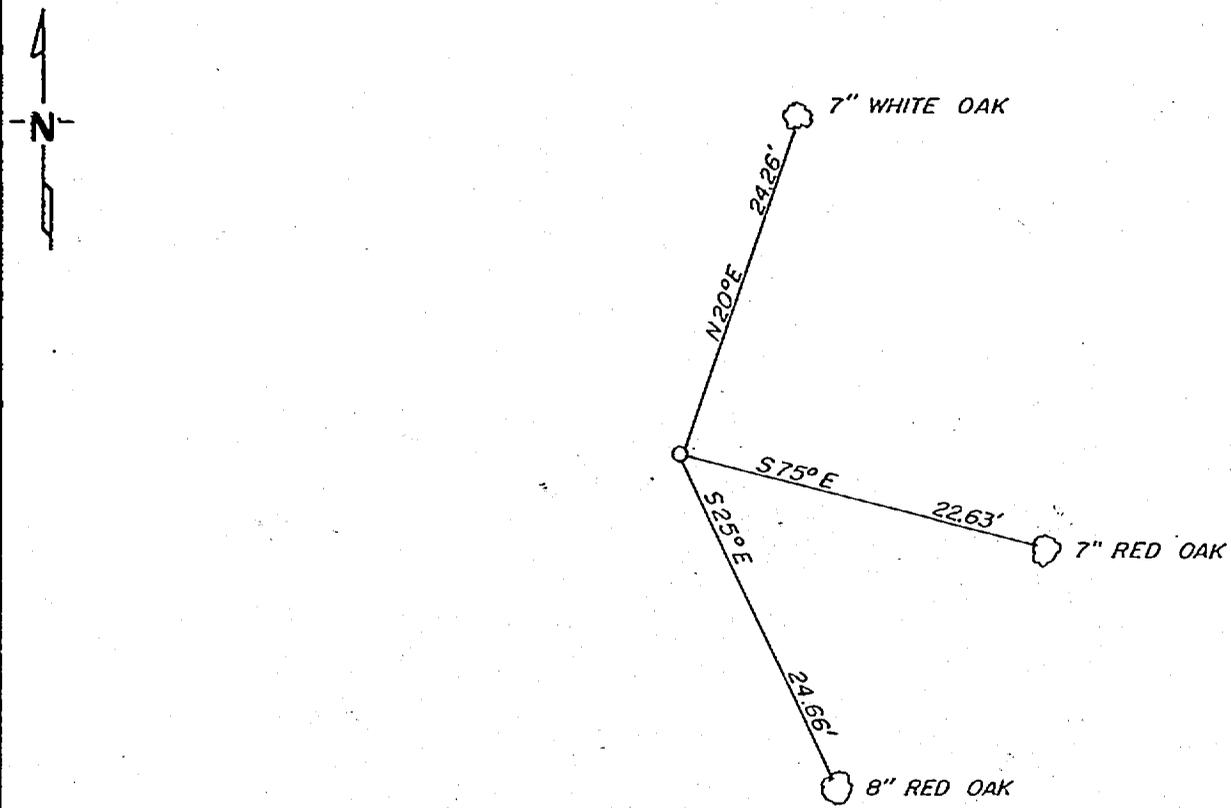

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-7-81
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

260872

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:10 P.M. on the 18 day of Dec. A.D., 1981

Register of Deeds Donald W. Smith County Recorder
By MS, Deputy

DOCUMENT NO. 260872

On October 22, 1981, Walter E. Curo and Paul Johnson set a 1 $\frac{1}{4}$ "x36" iron pipe for the CW 1/16 corner of Sec. 12 at the midpoint and on line between the W $\frac{1}{4}$ corner and the C $\frac{1}{4}$ corner of Sec. 12.