

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

#47 MEANDER Corner of Section 15&16, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 12/19/80 found a GLO brass cap monument in place as set in 1918.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

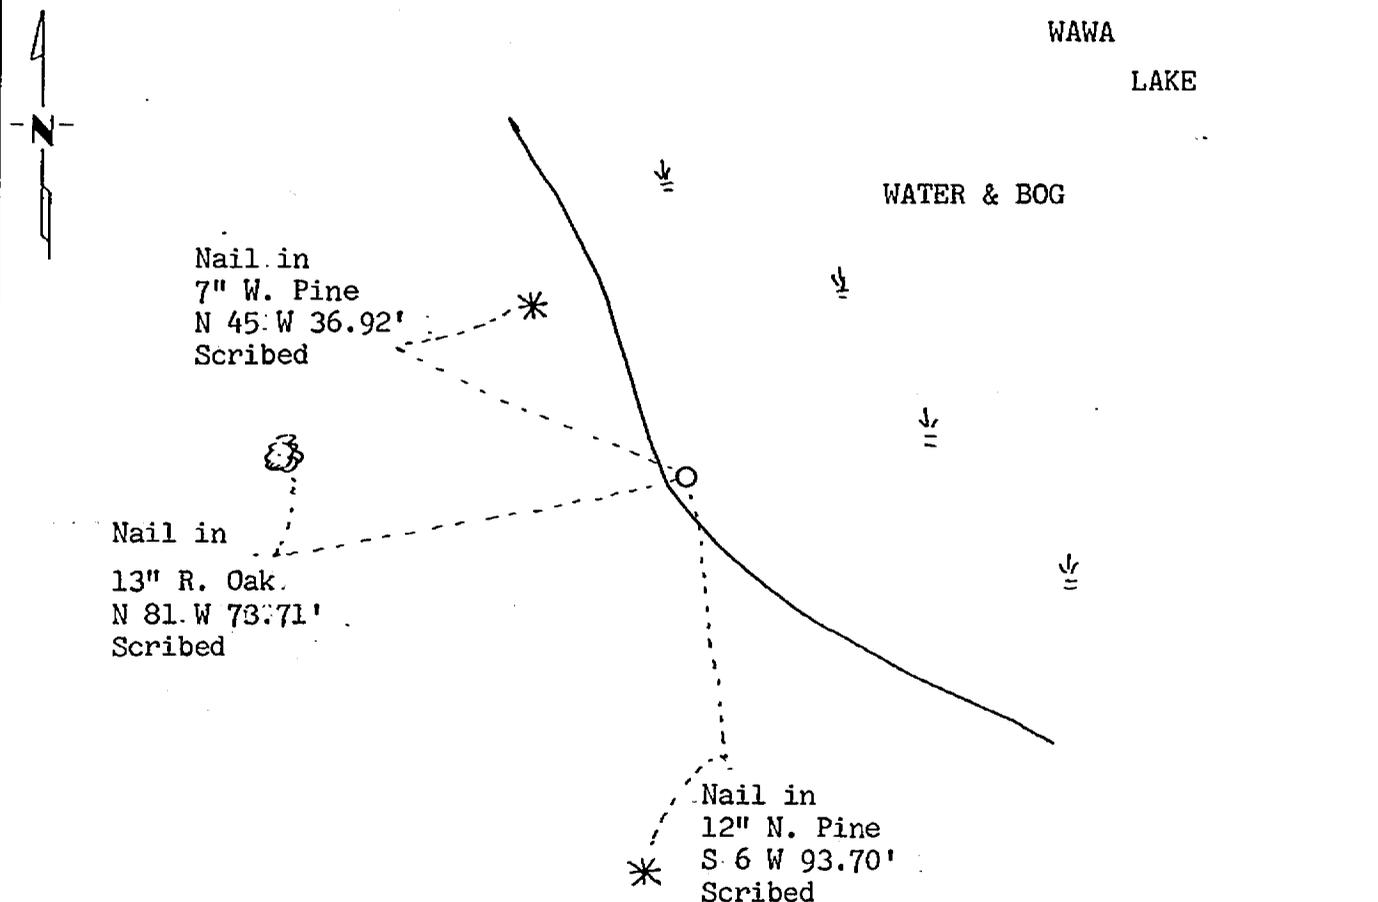

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

260999

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Amy H. Stevenson 12-23-81
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:37 A.M. on the 31 day of Dec. A.D., 1981

County Recorder Beverly Hendricks

By M.S., Deputy

DOCUMENT NO. 260999

Statement of Evidence:

- 1873 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 3" Poplar N 42-30W15 links and 3" Poplar S 6 E 30 links.
- 1918 U.S. General Land Office dependent resurvey reestablished this corner by proportional measurement and set a 1" iron pipe with a marked brass cap. A mound of stone was raised south of the corner. No bearing trees were marked. No evidence of the original post or bearing trees was found.
- 1980 USFS technician W. Olson found GLO brass cap monument in place. Pipe was leaning and it was straightened up. Pipe is in water at edge of lake. Stones sunken around monument. Three new bearing trees were marked and are shown on this certificate. Steel fence post set 4' south of corner.
- 1981 On Dec. 8, I visited corner area and found items as per 1980 USFS report.
- 1981 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.