


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CS 1/16 Corner of Section 35, Township 142, Range 30, 5 P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-3-81 found a 1"x36" iron pipe with brass cap standing in good condition.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

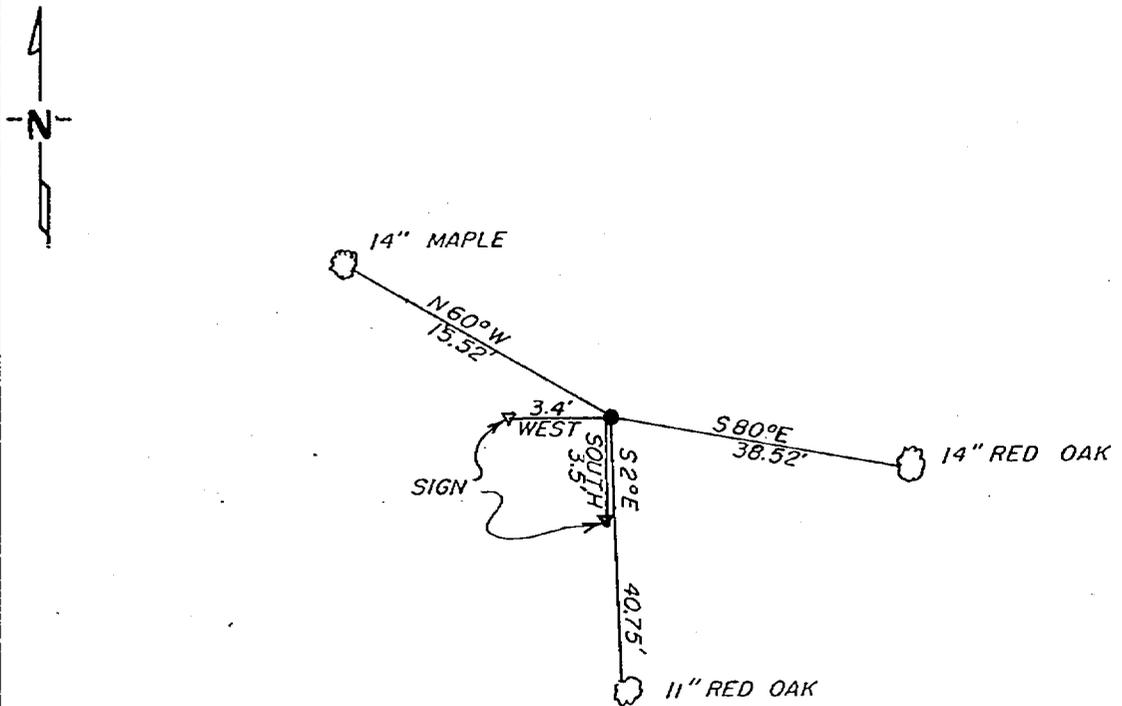

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-8-81  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

262604  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:42 A. .M. on the 7 day of May A.D., 1982

Register of Deeds Burdah Hendricks  
 By MS, Deputy

DOCUMENT NO. 262604

In 1918, Albinus N. Kimmell, a US Cadestral engineer set a 1"x36" iron pipe with brass cap for the CS 1/16 Sec. 35 from which he made the following BT's. A 8" jackpine N 38 E 50 LKS. A 10" red oak N 8¼ W 31 LKS.

On October 3, 1981, Walter E. Curo and Paul Johnson find the brass cap monument standing in good condition. We look for the original BT's but find no trace of them. We make new BT's as shown on the front.