


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW 1/16 Corner of Section 36, Township 142, Range 30, 5 P.M.
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9-10-81 found a 1"x36" iron pipe with brass cap stamped
SW 1/16 S 36 1918 standing in good condition
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

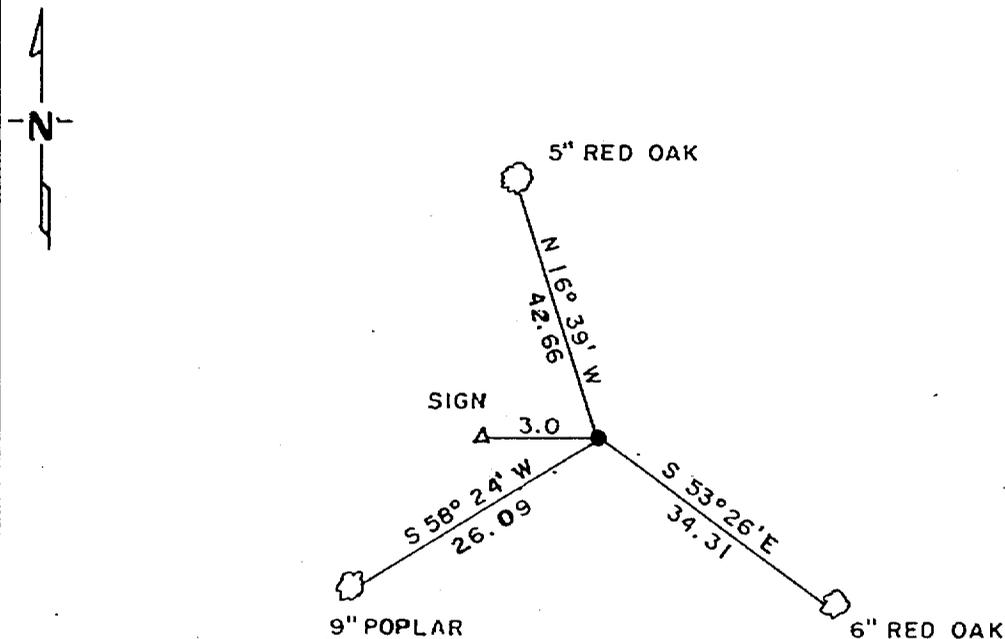

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-8-81
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

262605
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:43 A.M. on the 7 day of May A.D., 1982

Register of Deeds Bertha Handberg
By MS, Deputy

DOCUMENT NO. 262605

In 1918, Albinus N. Kimmel, US Cadastral engineer set a 1"x36" iron pipe with brass cap stamped SW 1/16, Sec. 36 from which he marked the following bearing trees A 6" JP N 51 $\frac{1}{4}$ W 114 LKS A 10" poplar S 82 $\frac{1}{4}$ W 125 LKS.

On September 10, 1981, Walter E. Curo found the iron monument standing in good condition. We search for the original bearing trees but find no trace of them. We mark new bearing trees as shown on the front of this card.