

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SE 1/16 Corner of Section 2, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 10-19-81 found a 1"x36" iron pipe monument with brass cap 2.5 feet below surface, set 2"x24" iron pipe with brass cap on top
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

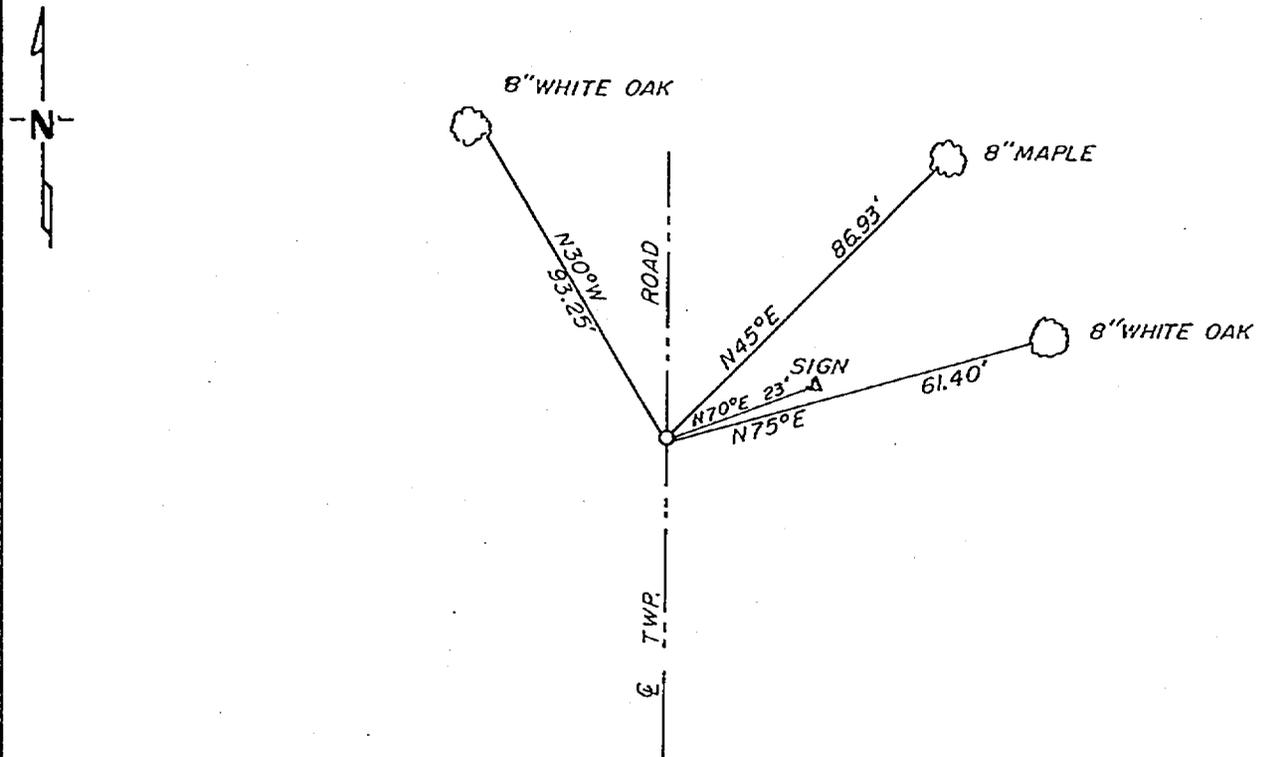

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Curro 12-8-81
SIGNATURE DATE
 Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

262612
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:10 A. .M. on the 7 day of May A.D., 1982

Register of Deeds Bernice Handrick
 By MS, Deputy

DOCUMENT NO. 262612

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for SE 1/16 corner from which he made the following BT's: A 6" norway pine S $43\frac{1}{2}$ W 176 LKS and a 10: norway pine N $37\frac{3}{4}$ W 178 LKS.

On October 19, 1981, Walter Curo and Paul Johnson find remains of an old pine stump with no markings visible. Measure S 37 E 117.5 feet and find a brass cap monument 24" below surface in centerline of the township road. We push it down and set a 2"x24" iron pipe with brass cap on top and make new BT's as shown on front.