

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CE 1/16 Corner of Section 11, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-27-81 found a 1"x36" brass cap monument standing in good condition with both original BT's standing green
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

SKETCH OF REFERENCE TIES

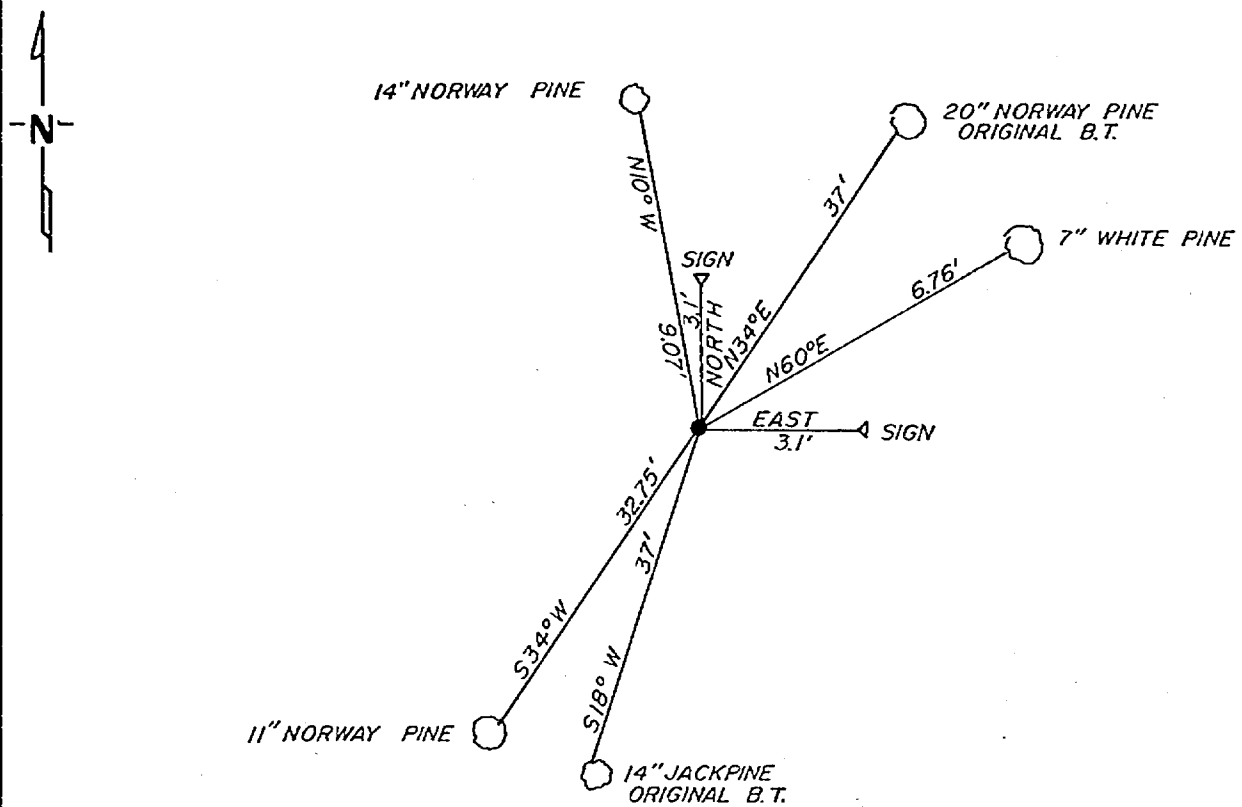

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 12-8-81
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

262615
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:25 A.M. on the 7 day of May A.D., 1982

Register of Deeds Bentah Herdicher
 By MS, Deputy
 DOCUMENT NO. 262615

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the CE 1/16 corner from which he made the following BT's: A 8" jack-pine 518 1/4 W 56 LKS and a 16" norway pine N 34 E 56 LKS.

On October 27, 1981, Walter Curo and Paul Johnson find the brass cap monument standing in good condition. We find both BT's which checks for bearing and distances. The 16" norway pine is now a 20" tree, the 8" jackpine is now a 14" tree. We make new BT's as shown on the front.