

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE 1/16 Corner of Section 12, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-6-81 found a 1"x36" iron pipe with brass cap leaning  
DATE  
over in swamp, set it up straight
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

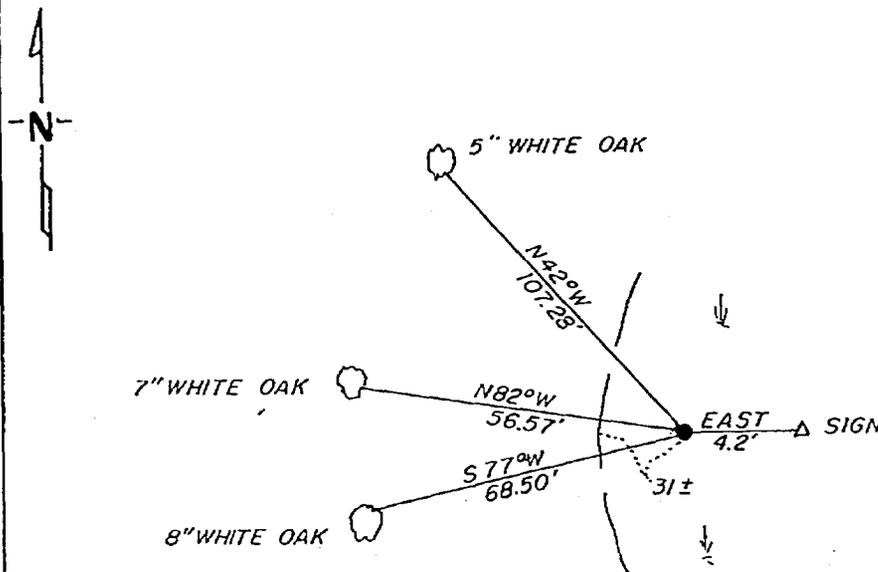

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lasso 12-8-81  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

262619  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:45 A. M. on the 7 day of May A.D., 1982

Register of Deeds Beneah Hendrich

By MS, Deputy

DOCUMENT NO. 262619

In 1917, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the NE 1/16 corner from which he made the following BT's. A 14" poplar N 14½ W 208 LKS and a 14" poplar S 44½ W 422 LKS.

On October 6, 1981, Walter E. Curo and Paul Johnson find the brass cap leaned over and 1 foot under the surface of the swamp, stand it up straight and wire it to a 8' steel fence post. We find no trace of the original BT's. WE made new BT's as shown on front.