

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/16 Corner of Section 1, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 9-14-81 placed a 2"x36" iron pipe with brass cap from old  
DATE pine BT and stump hole and center of old road

### SKETCH OF REFERENCE TIES

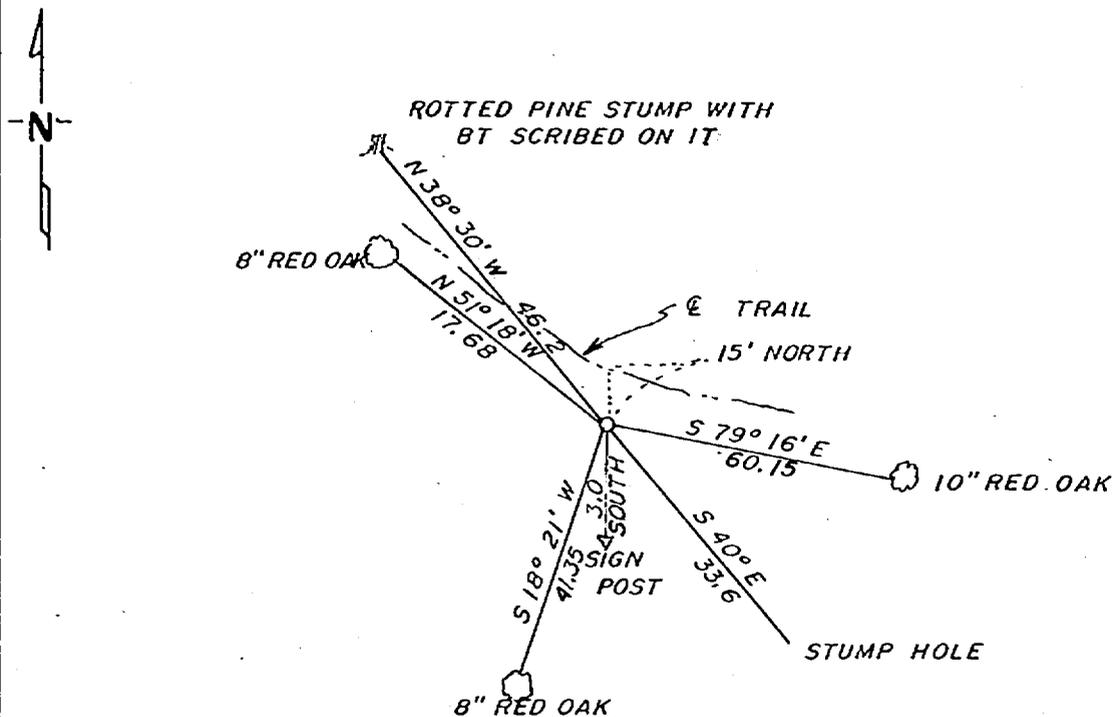

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cuss 12-8-81  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

26 26 31  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 1:45 P.M. on the 7 day of May A.D., 1982

Register of Deeds Bessie Hardin  
 By MS, Deputy

DOCUMENT NO. 26 26 31

In 1917, Earl G. Harrington, a US Surveyor set a 1"x36" iron pipe with a brass cap from which he made the following BT's. A 16" pine N 48½ W 70 LKS and a 16" oak S 29¼ E 51 LKS and 15' south of centerline of old road.

On September 14, 1981, Walter E. Curo and Paul Johnson find the remains of the pine BT with the scribing legible we measure the distance and set a point, then we measure S 40 E 33.6 and find a hole where a tree rotted away. We set a 2"x36" iron pipe with a brass cap from these ties.