

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


W 1/16 Corner of Section 12, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-29-81 found a 1"x36" brass cap mon. 1 ft. south of centerline  
and 18" DATE below surface, push it down, set a 2"x24" brass cap mon.
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

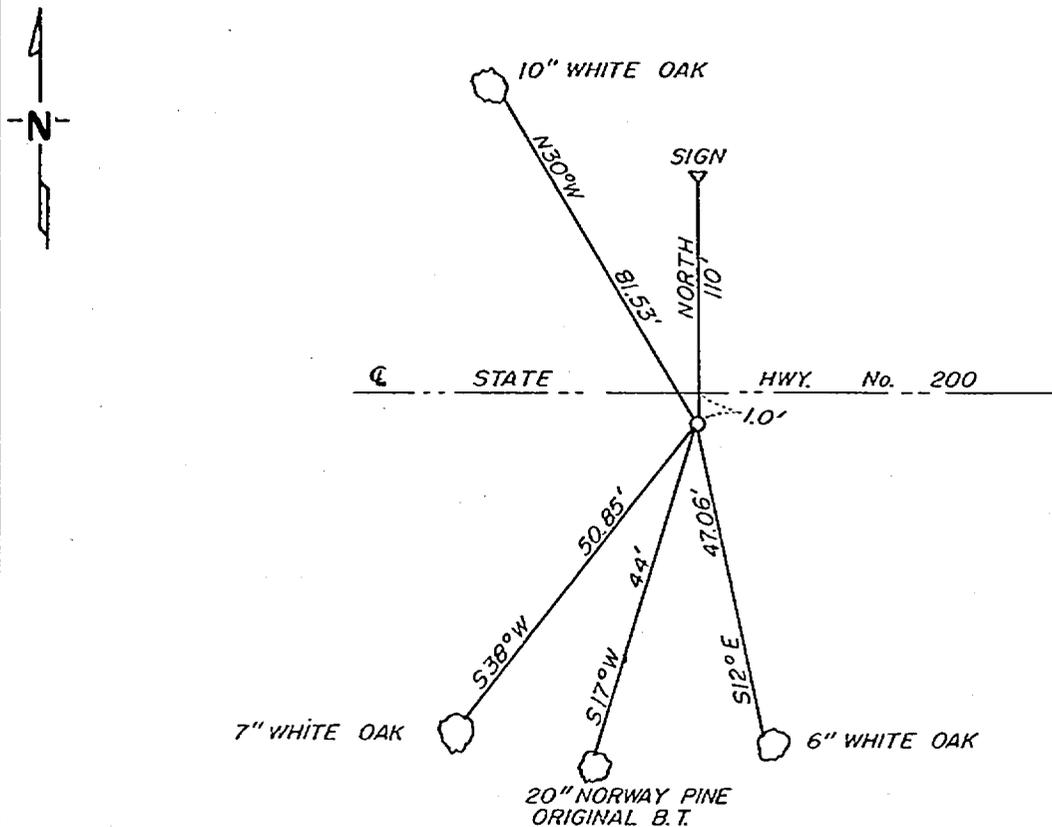

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Arvo 12-8-81  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

262635  
OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:05 P.M. on the 7 day of May A.D., 1982

Register of Deeds Bertal Herdiner  
By MS, Deputy

DOCUMENT NO. 262635

In 1917, Earl G. Harrington a US surveyor set a 1"x36" iron pipe with brass cap for the W 1/16 corner Sec. 12 from which he makes the following BT's: 7" norway pine N 23-1/2 E 42 LKS and a 10" norway pine S 17-1/2 W 67 LKS.

On October 29, 1981, Walter Curo and Paul Johnson find a 20" NP BT S 17 W 44 ft., also a nail and disk in a 8" twin white oak NW 87.8 ft., a nail and disk in a 14" norway pine NE 74.6 ft. These ties were made by M.H.D. in 1941. We dig hole and find brass cap, set a 2"x24" iron pipe with brass cap on top. Make new BT's as shown on front.