

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


N 1/16 Corner of Section 12, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11-10-81 placed a 2"x24" iron pipe with brass cap from original
DATE BT stump and rotted remains of other BT

SKETCH OF REFERENCE TIES

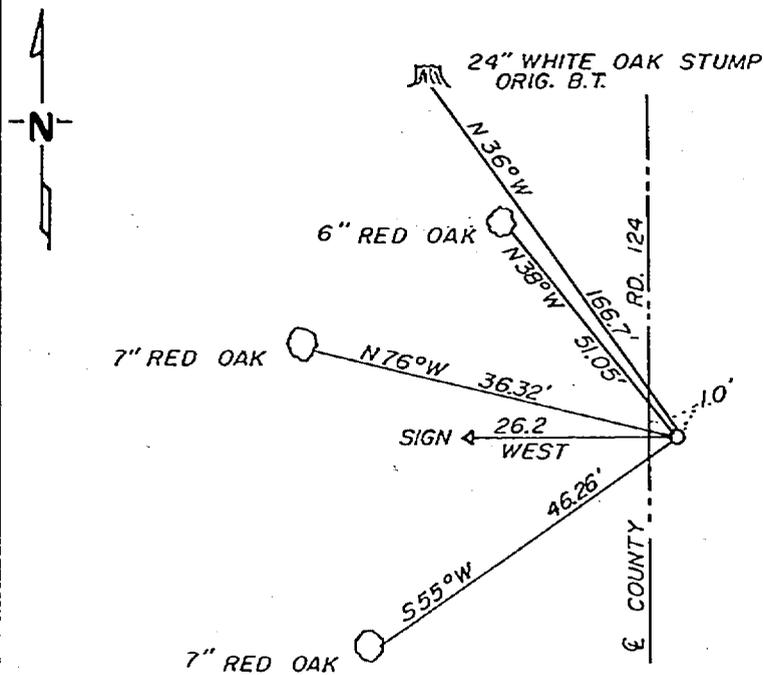

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Coors 12-8-81
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

262636
OFFICE OF THE REGISTER OF DEEDS
County of Pleas

I hereby certify that this document was filed in the Reg. of Deeds office at 2:10 P. .M. on the 7 day of May, A.D., 1982

Register of Deeds Benedict Bendlin
By M S, Deputy

DOCUMENT NO. 262636

In 1917, Earl G. Harrington a US surveyor set a 1"x36" iron pipe with brass cap for the N 1/16 corner from which he made the following BT's: A 14" red oak N 40 E 55 LKS and a 10" white oak N 36-1/4 W 298 LKS.

On November 10, 1981 Walter Curo and Paul Johnson found a 24" W O stump N 36 W 196.7' and rotted remains of a red oak N 40 E 36 ft. from these ties we set a 2"x24" iron pipe with brass cap and make new BT's as shown on the front.