


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/16 Corner of Section 1, Township 141, Range 30, 5 P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9-14-81 found a 1"x36" iron pipe with brass cap standing  
DATE in good condition  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

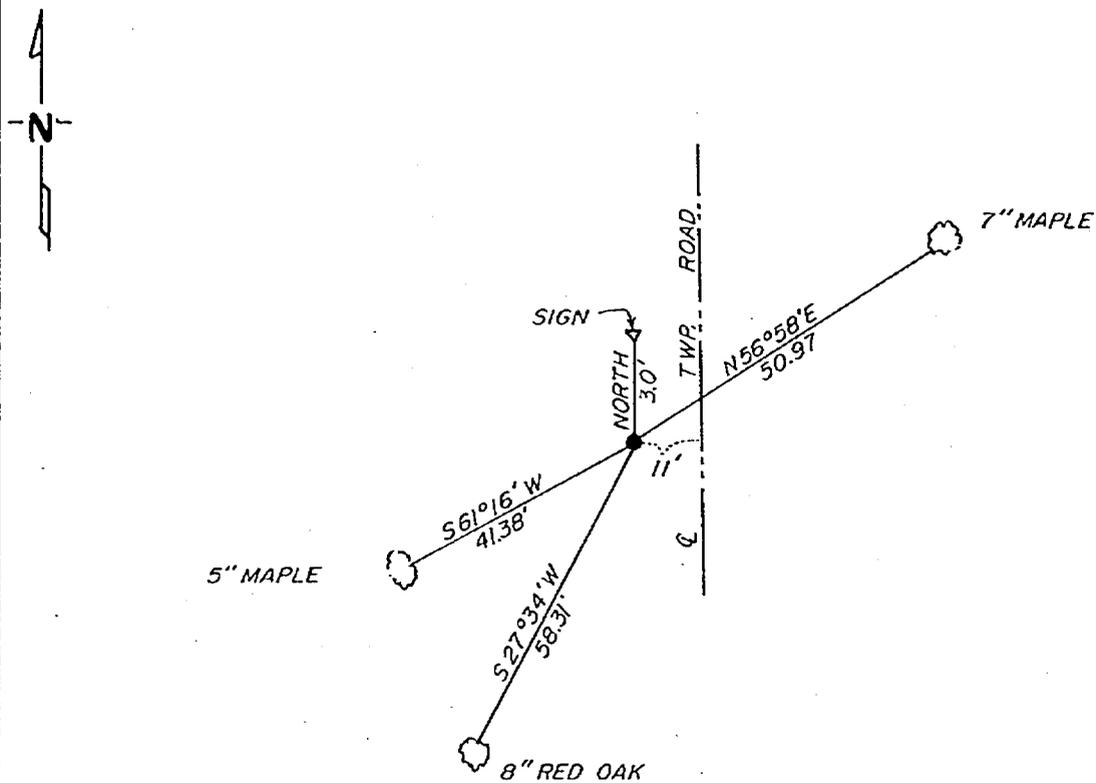

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 12-8-81  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

26 2647  
 OFFICE OF THE REGISTER OF DEEDS  
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:49 P.M. on the 7 day of May A.D., 1982

Register of Deeds Bessie Hendricks  
 By M S, Deputy  
 DOCUMENT NO. 26 2647

In 1917, Earl G. Harrington, a US Surveyor set a 1"x36" iron pipe with brass cap for the S 1/16 corner from which he made the following BT's. A 12" oak S 37 E 56 LKS and a 12" oak S 39½ W 242 LKS.

On September 14, 1981, Walter E. Curo and Paul Johnson find the brass cap monument standing in good condition on west edge of the Twp. road. We find no trace of the original BT's. We made new BT's as shown on front.