


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/16 Corner of Section 35, Township 142, Range 30, 5 P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-23-81 found a 1'x36' brass cap monument in good condition
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

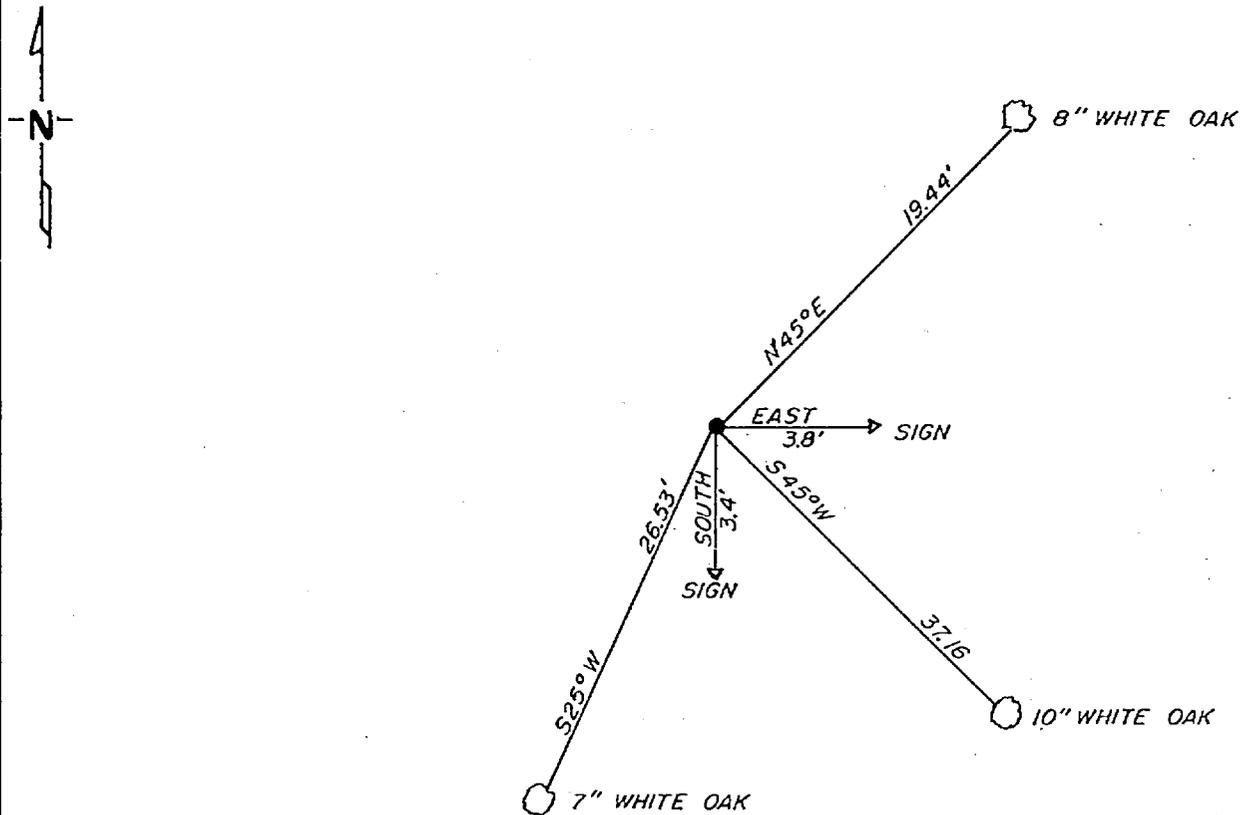

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 12-8-81
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

262651
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:53 P.M. on the 7 day of May A.D., 1982

Register of Deeds Beulah Hendrick
 By M.S., Deputy

DOCUMENT NO. 262651

In 1918, Albinus N. Kimmell, a US Cadastral engineer set a 1'x36' iron pipe with brass cap for the S 1/16 bwtween Sec. 34 and 35 from which he made the following BT's. A 4" pine S 30 3/4 E 127 LKS. A 8" oak N 29 1/4 W 35 LKS.

On October 23, 1981, Walter E. Curo and Paul Johnson found the brass cap monument in good condition with the oak BT still standing which checks for distance and bearing. No trace of the pine. We make new BT's as shown on the front.