


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 34, Township 145, Range 28, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 4/26/82 found a 3" wood post point from 1907 survey information.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/26/82 placed a 5/8" x 10' aluminum rod with 3" aluminum cap in
DATE
hole of found post point - post point set along side.

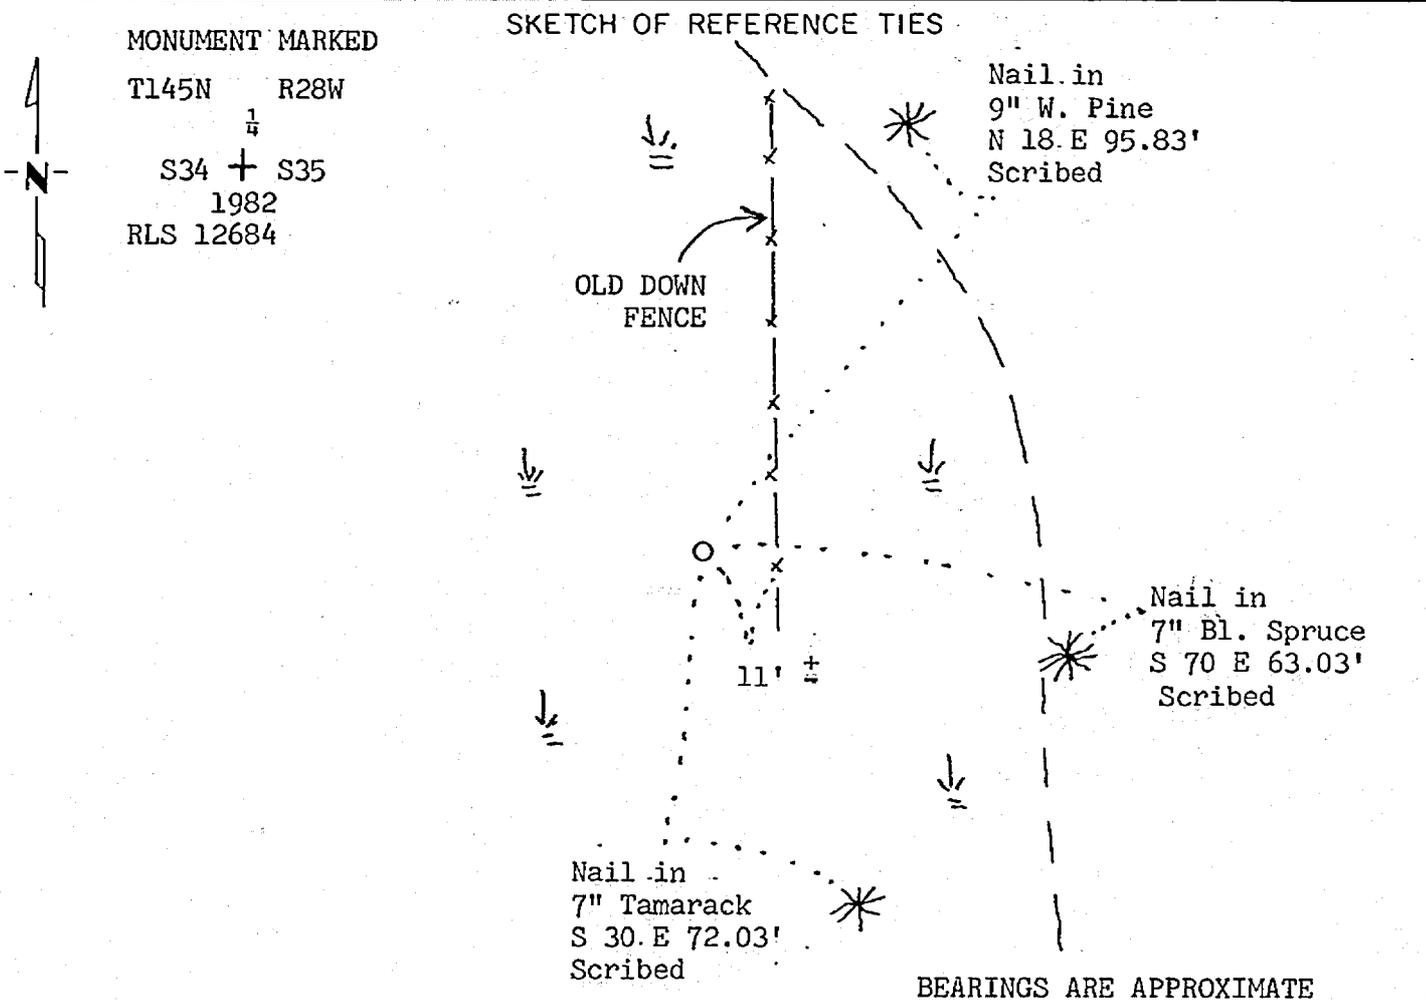

Statement of evidence relative to this corner location is on back of page 263907

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gary H. Stevenson 5-14-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:45 A.M. on the 22 day of July A.D., 1982

County Recorder Beverly Henderson
By MS, Deputy

DOCUMENT NO. 263907

Statement of Evidence:

- 1873 U.S. General Land Office survey set wood post for this corner and marked the following bearing trees: 7" J. Pine N 12 W 200 links and 6" J. Pine N 15 E 115 links.
- 1907 County Surveyor's Record Book B pages 323 to 327 show survey by John Curo. The survey shows both original bearing trees found plainly marked, but that the bearings and distances do not intersect. Curo set a post by intersecting the bearings from the trees after which they are as follows: 7" J. Pine N 12 W 70.80' and 6" J. Pine N 15 E 62.60'. Curo states that this is temporary corner and that James Middleton will check further south for the original post later. Curo distance from his post to the NE corner of Sec. 34 is 2538.72'. Curo received a letter from Middleton dated July 16, 1908 in which he states that he found the remains of the old U.S. stake 64 feet south of Curo's stake.
- 1976 USFS technician R. Olesen searched for corner by following an old down fence from the approximate NE corner of Sec. 34. No evidence was found.
- 1982 After traversing in Section 34, I computed the location of Curo's corner based on his 1907 survey. From this information we found evidence of an old down north-south fence line in the bog. Also found remains of a J. Pine root that fit the position called for by Curo for the NW bearing tree. Found no evidence of Curo's wood post. On April 26, I searched for evidence with USFS Surveyor K. Whitehorn, USFS technician C. Krause, and Cass County technician T. Freeman. We searched area 64' south of Curo's position and found a 3" round wood post point with sharpened end down under bog. Accepted this post point as marking the original corner as found by Middleton. We set a 5/8" x 10' long aluminum rod with 3" aluminum cap in hole of found post. We also found laying down a cut 8' length of post which evidently had been standing alongside. From the corner set the remains of the J. Pine stump was found to be N 2° - 30' W 134'. The distance north to the NE corner of Sec. 34 was found to be 2600.2 feet. This all agrees very well with the Curo survey and Middleton's findings. No evidence of the NE bearing tree was found. Three new bearing trees were taken and are shown on this certificate. The new trees were all scribed "¼ S 35 BT".

NOTE: It appears that Middleton found the corner at approximately the correct distance from the original J. Pine bearing tree. The edge of swamp call to the north given in the original notes also checks well. It appears the original call to the NE bearing trees is the one that was in error, it should have been something like N 12 E 195 links.