

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST SIXTEENTH 34 143
 Corner of Section S 3, Township 142, Range 28, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 8/25/82 found a GLO brass cap monument as set in 1928.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

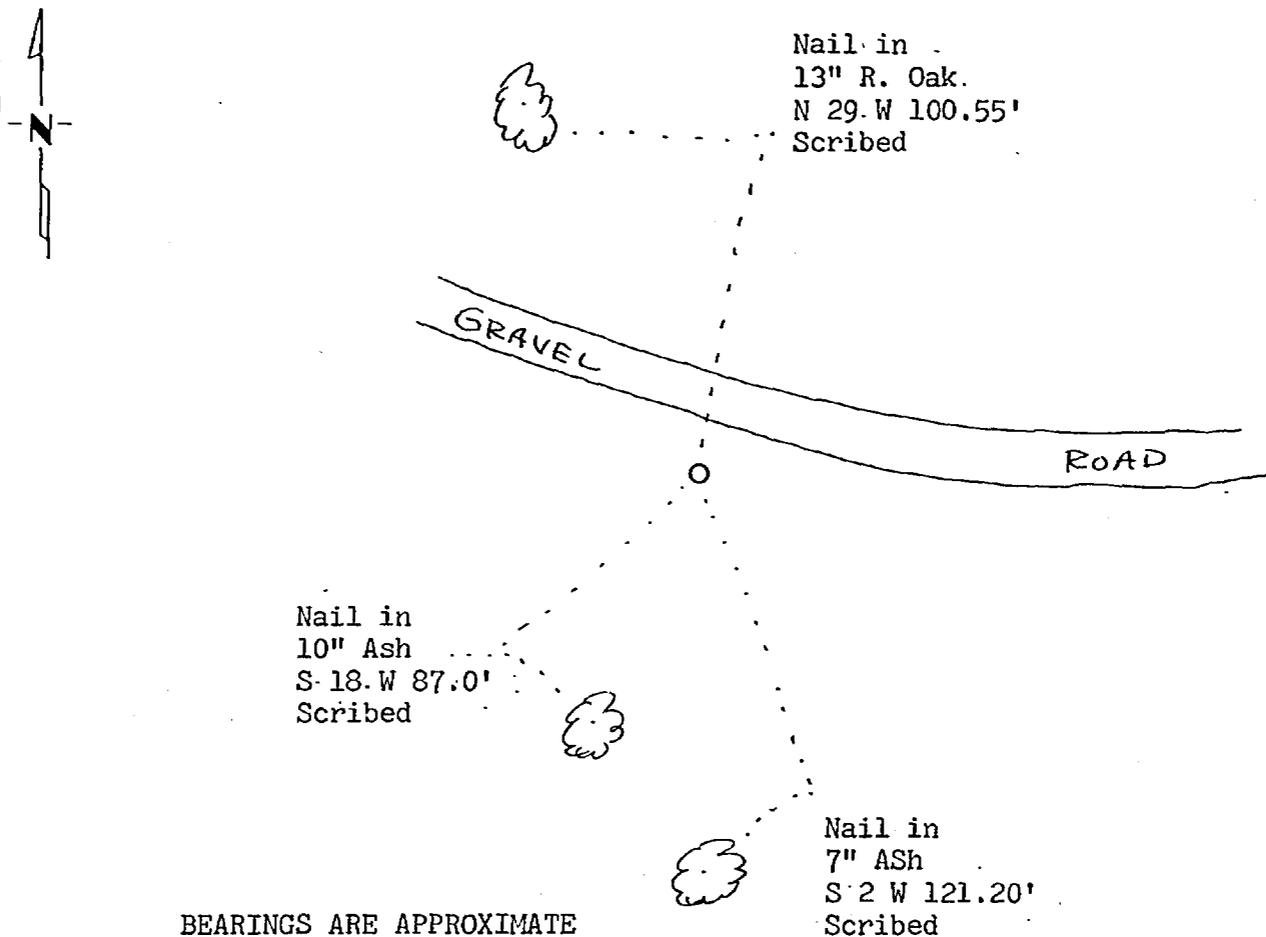

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-13-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

264928
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:17 A.M. on the 14 day of Sept. A.D., 1982

County Recorder Dennis K. Smith
 By MS, Deputy

DOCUMENT NO. 264928

Statement of Evidence:

- 1928 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 4" Poplar S 8-30 E 69 links and 4" Poplar N 84 W 47 links.
- 1982 U.S. Forest Service technician C. Krause found the corner monumented with a marked GLO brass cap leaning in small grass marsh. Base was in place. Straightened monument and lowered flush with the ground. No evidence was found of the GLO bearing trees. Chained east to the NE corner of Sec. 4 and south to the NE 1/16 corner of Sec. 4. Both distances checked good with the 1928 GLO distances. Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set 4.0' east and 4.0' west of the corner. Corner is 30'± south of east-west road.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 On Sept. 10 I visited the corner and found items as per the 1982 USFS reports. I accepted the monument as marking the same position as when set in 1928 based on the base of monument being firmly in place and the distance checks east and south.