

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER QUARTER Corner of Section 2, Township 144, Range 30, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 3/18/81 found a GLO brass cap monument as set in 1930.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

## SKETCH OF REFERENCE TIES

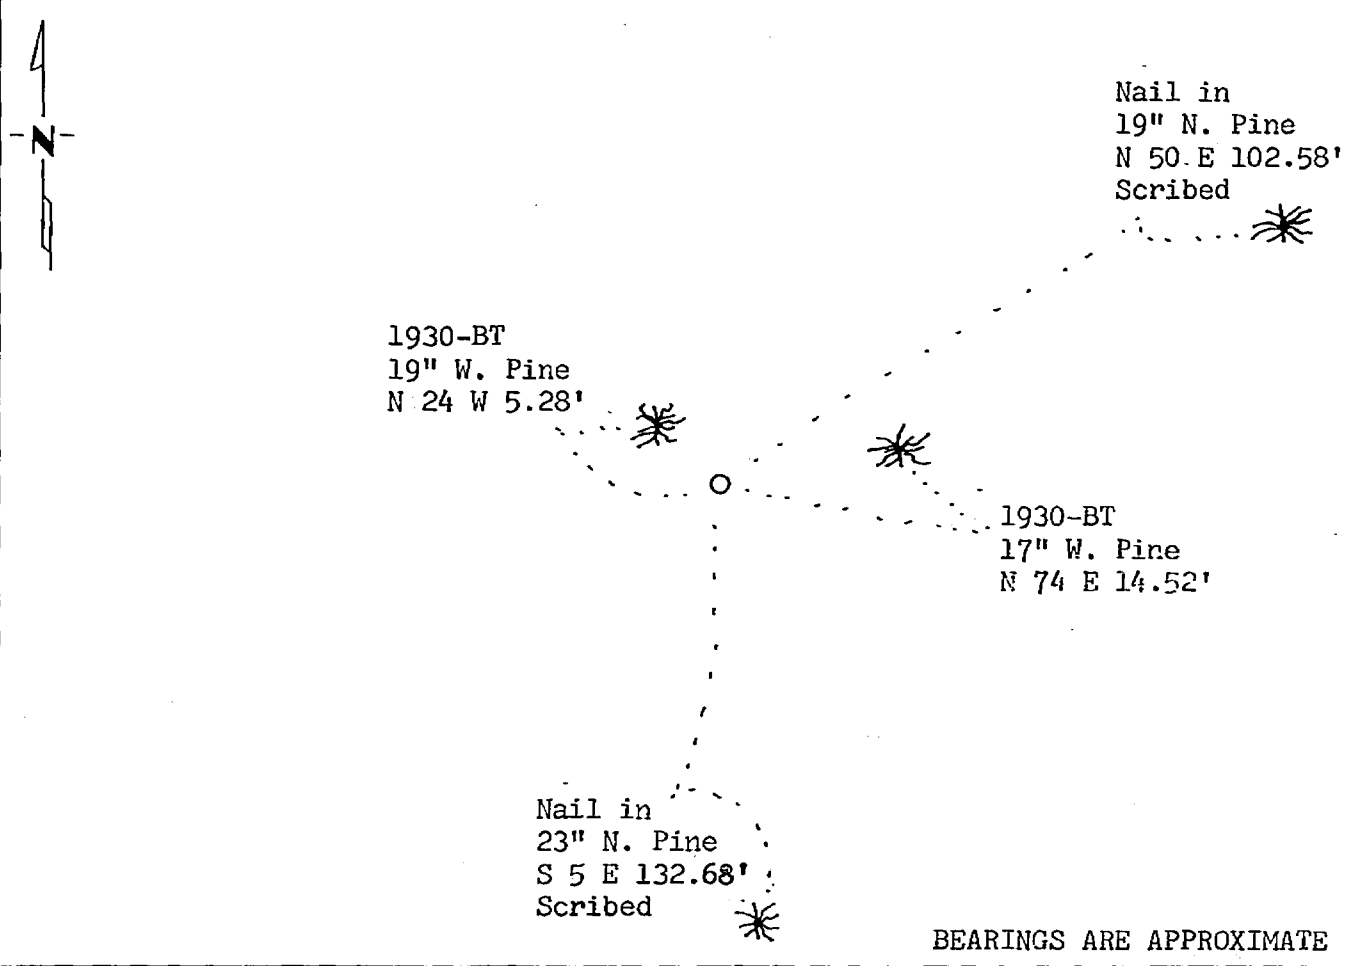

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Stevenson 9-11-82  
SIGNATURE DATE

Registration No. 12684

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

264949  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:02 A.M. on the 14 day of Sept. A.D., 1982

County Recorder Burdah Hendrich  
By MS, Deputy

DOCUMENT NO. 264949

Statement of Evidence:

- 1930 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 12" W. Pine N 74 E 22 links and 14" W. Pine N 24 W 8 links.
- 1934 U.S. Forest Service records show the following: CCC records show brass cap monument and both W. Pine bearing trees found.
- 1981 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 1.0'. The following bearing trees were found: 17" W. Pine N 74 E 14.52' and 19" W. Pine N 24 W 5.28'. Both trees were rescribed "BT". Two new bearing trees were marked and are shown on this certificate. Steel sign posts were set 3.7' north and 4.5' east of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1930 by the GLO resurvey based on bearing tree evidence.