

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WITNESS CORNER TO

SPECIAL MEANDER

Corner of Section 34, Township 144, Range 30, 5th P.M.

ON NORTH-SOUTH 1/4 LINE

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 1/26/81 found a GLO brass cap monument as set in 1930.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

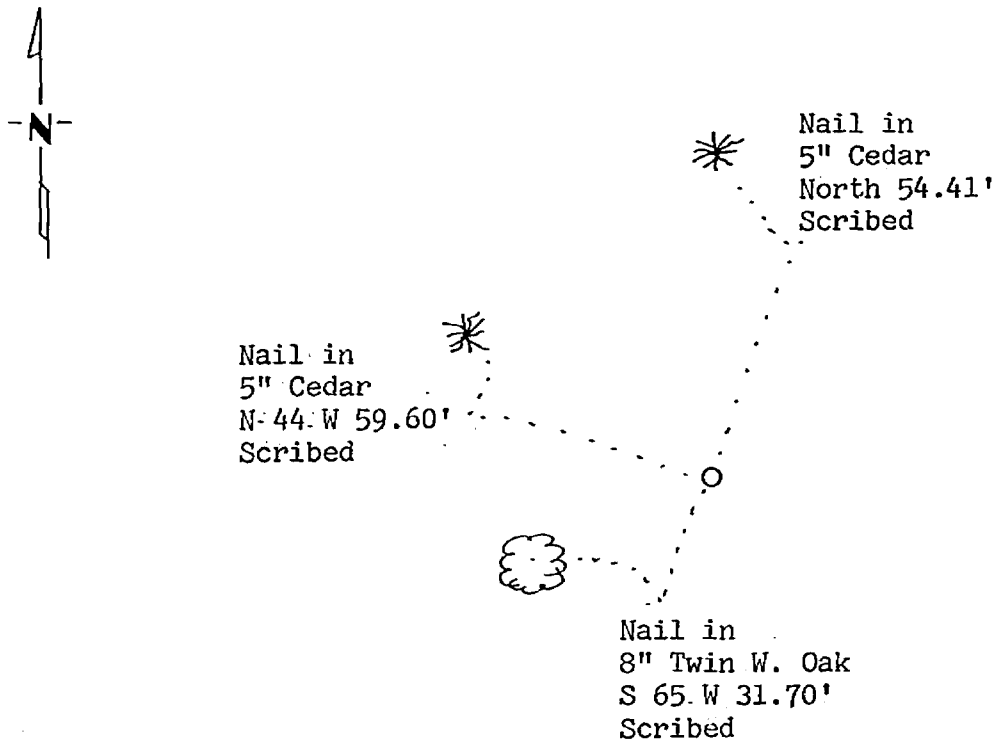

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sandy H. Stevenson
SIGNATURE

9-11-82
DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 14 day of Sept. A.D., 1982

County Recorder Beverly Heister

By MS, Deputy

DOCUMENT NO. 26490

Statement of Evidence:

- 1930 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 6" Cedar N 45½ E 37 links and 5" Cedar S 65 ¾ W 66 links. The notes show corner established as witness corner 8.36 chains north of actual lake shore.
- 1981 U.S. Forest Service technician G. Brama found GLO brass cap monument in good condition up 12". The following bearing trees were found: Cedar stump laying down N 45 W 34.4' with scribe and Cedar stump S 66 W 43.6' with scribe. Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set 3.05' north and 3.75' south of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1930 by the GLO resurvey based on bearing tree evidence.