

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/16 Corner of Section 1, Township 141, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9-17-81 found a 1"x36" iron pipe with brass cap standing in good condition. Stamped E 1/16 S 36 S 1 1917

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

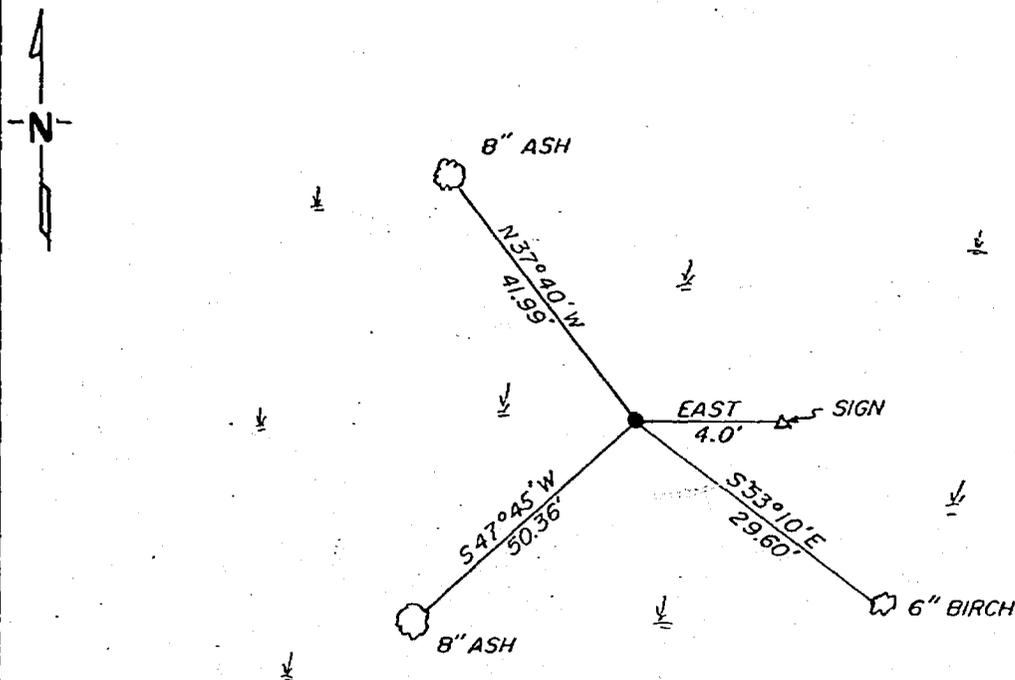

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cress 12-8-81
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

265244
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:05 A.M. on the 29 day of Sept. A.D., 19 82

Register of Deeds Deborah Handrich

By MS, Deputy

DOCUMENT NO. 265244

County Recor

In 1917, Earl G. Harrington, US Surveyor set a 1"x36" iron pipe with brass cap for the E 1/16 corner from which he made the following BT's. A 14" cedar N 40 $\frac{1}{2}$ W 30LKS and a 14" cedar S 22 $\frac{1}{2}$ W 26LKS.

On September 17. 1981, Walter E. Curo and Paul Johnson find the brass cap monument just above surface of swamp. We find rotted stumps which check good for bearing and distance of original BT's. We make new BT's as shown on front.