


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/16 Corner of Section 5-6, Township 145N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11/19/81 placed a 2" x 5' iron pipe with brass cap
DATE

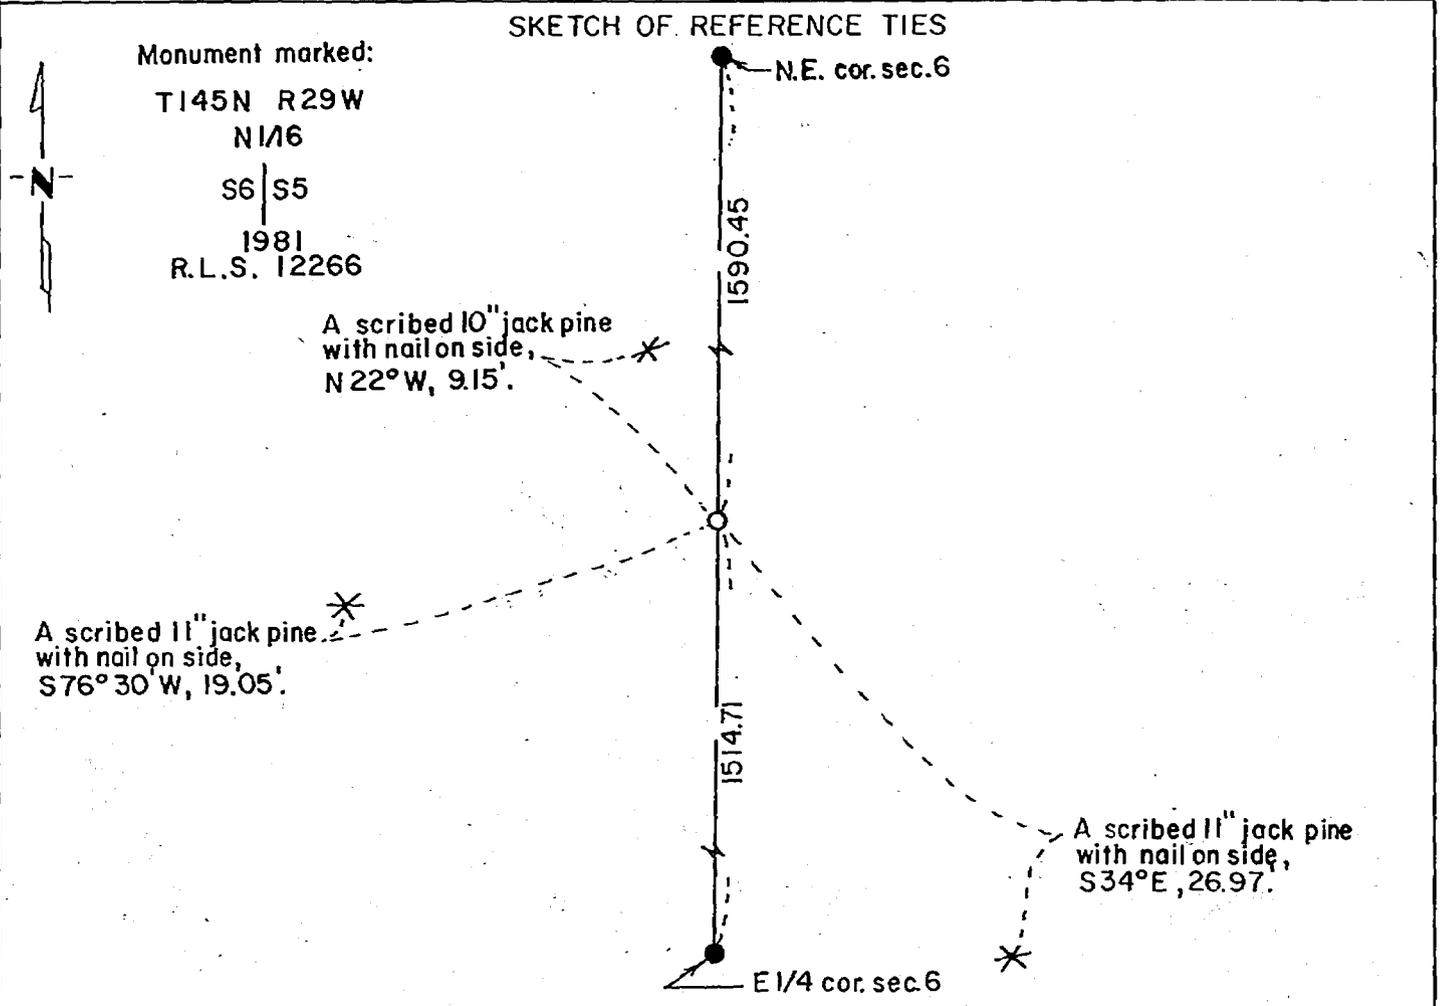

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony E. Kerick 11/30/81
SIGNATURE DATE

Registration No. 12266

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

265249
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:30 A. .M. on the 29 day of Sept. A.D., 1982

County Recorder Benedict Herdich
 By M S, Deputy

DOCUMENT NO. 265249

Statement of Evidence:

NORTH 1/16 CORNER OF SECTION 5-6, TOWNSHIP 145 NORTH,
RANGE 29 WEST OF THE 5th PRINCIPAL MERIDIAN.

A Kèrick, in 1981, made a Line to Standard Survey for the U. S. Forest Service. He set the North 1/16 corner on line and proportionate distance between the East $\frac{1}{4}$ corner of Section 6. He set a marked brass cap on a 5 foot long, 2 inch diameter, iron post and recoded the following bearing trees as accessories: An 11 inch Jack Pine South 76 degrees 30 minutes West 19.05 feet, an 11 inch Jack Pine South 34 degrees East 26.97 feet.

An analysis of the above data indicates that a corner was set that was not placed by the original Public Land Survey, but placed in its true position according to Laws of Proportionate Measure of the Public Land System.