

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 7, Township 145N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 11/20/81 found a 2" X 5' Iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

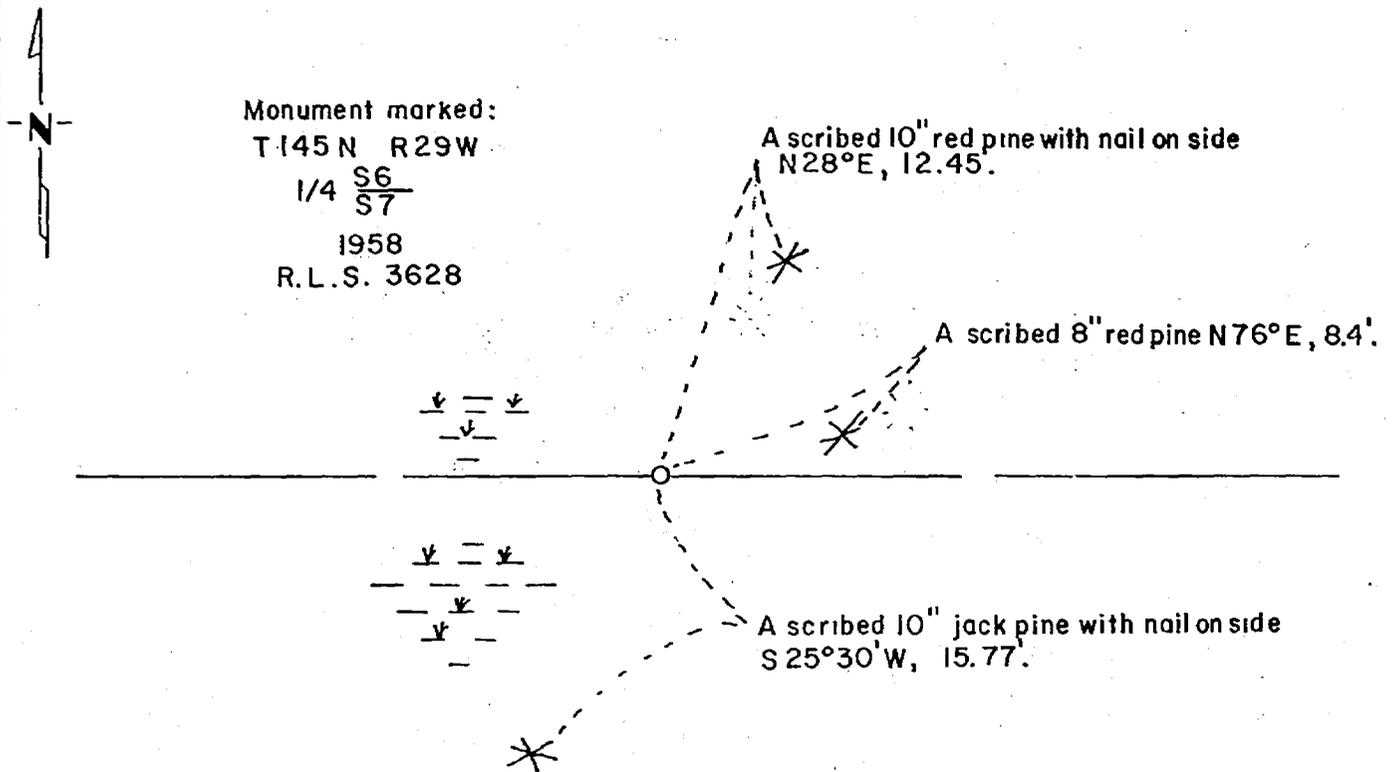

Monument marked:
 T.145 N R.29 W
 1/4 $\frac{S6}{S7}$
 1958
 R.L.S. 3628

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony C. Kerick 11/30/81
SIGNATURE DATE

Registration No. 12266

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

265251
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:40 A.M. on the 29 day of Sept. A.D., 19 82

County Recorder Beneah Hendricks
 By MS, Deputy County Recorder

DOCUMENT NO. 265251

Statement of Evidence:

NORTH QUARTER CORNER OF SECTION 7, TOWNSHIP 145 NORTH,
RANGE 29 WEST OF THE 5th PRINCIPAL MERIDIAN.

The original Public Land Survey was run in 1874 by Bonger. He placed a wood post to mark the corner and recorded two bearing trees as accessories: a 4 inch Black Pine South 35 degrees East 5 links, a 5 inch Black Pine North 6 degrees East 34 links.

In 1958, Peter J. Meyer, Registration No. 3628, found no remains of the corner, but did find the remains of one original bearing tree, a 10 inch windfall with scribing $\frac{1}{4}$ South B.T. visible, North 6 degrees East 34 links. He set a marked brass cap on a 5 foot long, 2 inch diameter, iron post and recorded the following bearing trees as accessories: an 8 inch Jack Pine North 58 $\frac{1}{2}$ degrees West 10.3 feet, a 7 inch Jack Pine South 25 $\frac{1}{2}$ degrees West 8.5 feet, a 6 inch Red Pine North 76 degrees East 8.4 feet.

In 1981, A. Kerick, Registration No. 12266, did not find any evidence of the original bearing tree. He found the marked brass cap on an iron post and the following bearing trees recorded by P. Meyer in 1958: a 9 inch Jack Pine windfall, scribing visible North 58 $\frac{1}{2}$ degrees West 10.3 feet, a 7 inch Jack Pine stump, scribing visible, South 25 $\frac{1}{2}$ degrees West 8.5 feet, an 8 inch Red Pine, living, scribing visible, North 76 degrees East 8.4 feet.

Two new bearing trees were marked as accessories and appear on this certificate. An analysis of the above data indicates that the location of this Public Land Survey corner has been perpetuated by the brass capped iron post and the accessories by Peter Meyer in 1958 and the accessories as recorded by A. Kerick in 1981.