

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

A.P. #3 TR 1675 Corner of Section 20, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/24/80 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

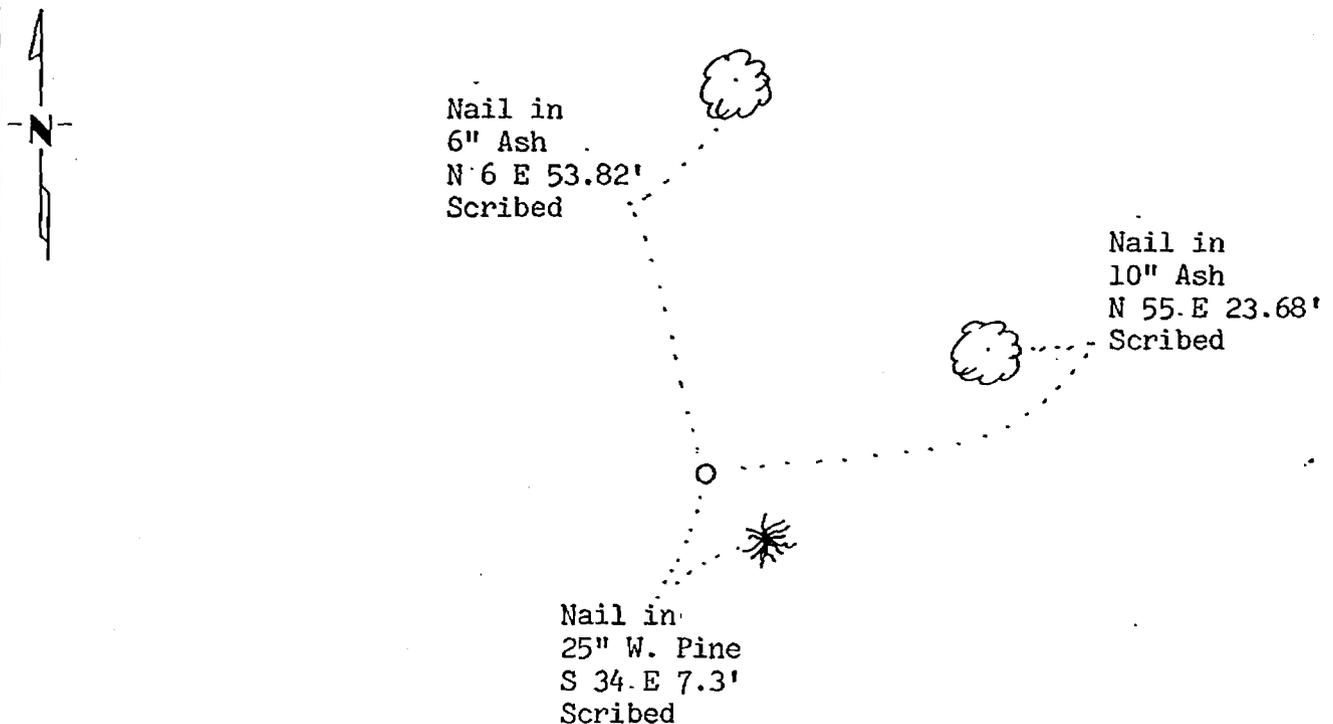

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-15-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

265252
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:45 A.M. on the 29 day of Sept. A.D., 1982

County Recorder Bessie Herdman
 By M.S. County Recorder Deputy

DOCUMENT NO. 265252

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner. and an iron pipe with a marked brass cap was set to mark the corner.
- 1980 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 6". Three new bearing trees were marked and are shown on this certificate.
- 1981 U.S. Forest Service technicians ran line from the CE 1/16 corner of Section 20 through this corner to the SE 1/16 corner of Section 20. Monument agreed very good with line and rough distance check compared to the 1919 GLO resurvey record.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the U.S. Forest Service information includes that the monument was found in the same position as when set in 1919.