

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 22, Township 142, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 12-22-80 found a spike set from previous survey records.
DATE

left monument as found, lowered monument, removed monument (explain)

On 5-3-82 placed a County Cast Iron Monument.
DATE

SKETCH OF REFERENCE TIES

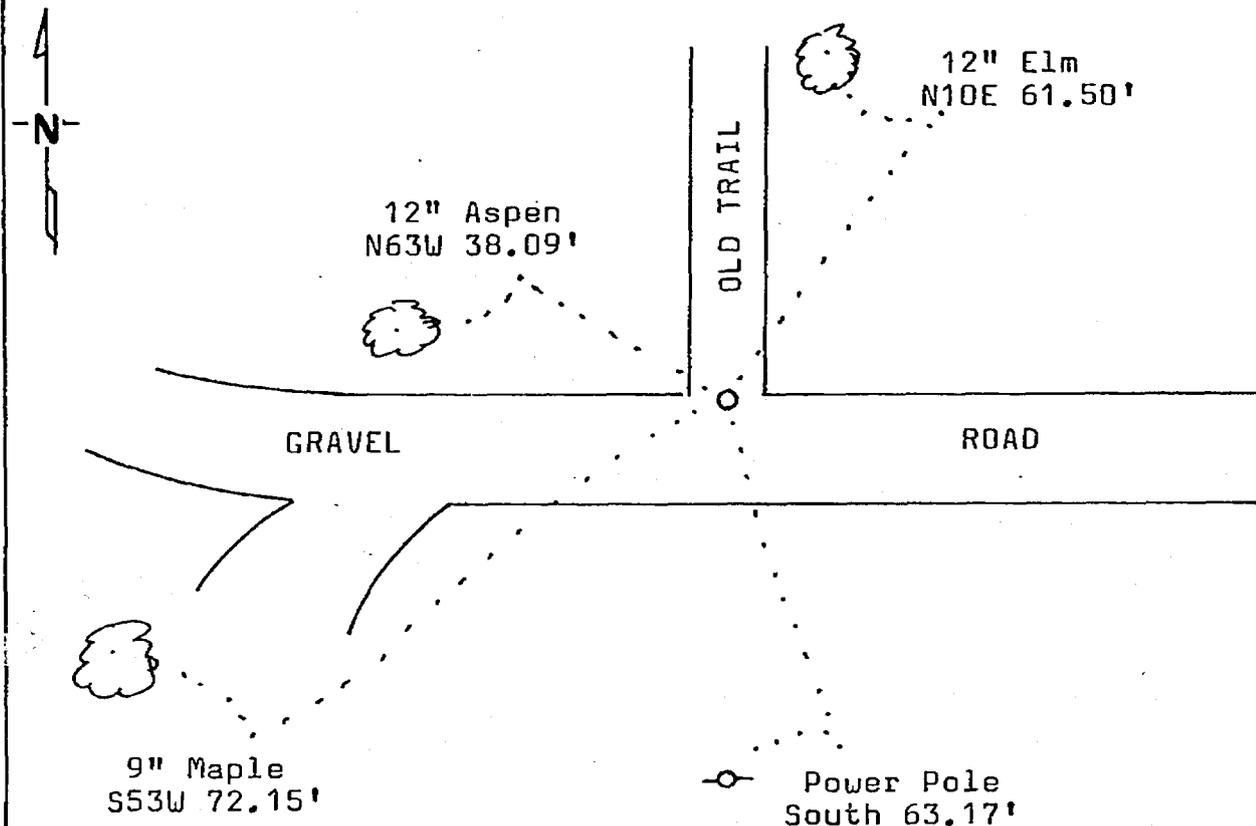

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Nancy H. Stevenson 3/14/83
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

267662
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 11:15 A.M. on the 14 day of March A.D., 1983

Register of Deeds Claudine Keyser

By MS, Deputy

DOCUMENT NO. 267662

Statement of Evidence:

- 1873 - U.S. General Land Office survey set wood post for this corner and marked the following bearing tree: 6" Elm N50E 25 links.
- 1919 - U.S. General Land Office dependent resurvey found the corner marked by the original wood stake and original bearing tree. A iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" Elm N87½W 57 links and 6" Balsam S17E 41 links.
- 1921 - County Surveyor's Record Book C, pages 432-434: Survey shows GLO resurvey brass cap monument found. Bearing trees listed: 5" Balsam S15E 27'2" and 12" Aspen N45E 22'2".
- 1957 - Plat of ROGER'S BEACH surveyed by John E. Howard, RLS. Plat shows this corner.
- 1969 - Survey information from R.F. Schneider, RLS, shows brass cap monument found with new ties: 10" Elm N10E 61.22' and 8" Maple S45W 71.83'.
- 1979 - U.S. Forest Service records show: Technician C. Krause found bent GLO iron monument lying on north side of east-west road. He set a spike for the corner based on irons in the plat of ROGER'S BEACH. This position checked with ties made by John Stark, RLS, of which they had information on. New ties taken: 12" Aspen N63W 38.09', 11" Elm N10E 61.50', 8" Maple S54W 72.17', and Power Pole South 63.20'.
- 1980 - Found spike set by the U.S. Forest Service. Spike checked with survey made by R.F. Schneider in 1969. I accepted the spike as marking the perpetuated position of the original corner based on the record and replaced the spike with a Cast Iron Monument.