

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 140N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 03/06/81 found a 2" capped pipe (down 0.3').

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

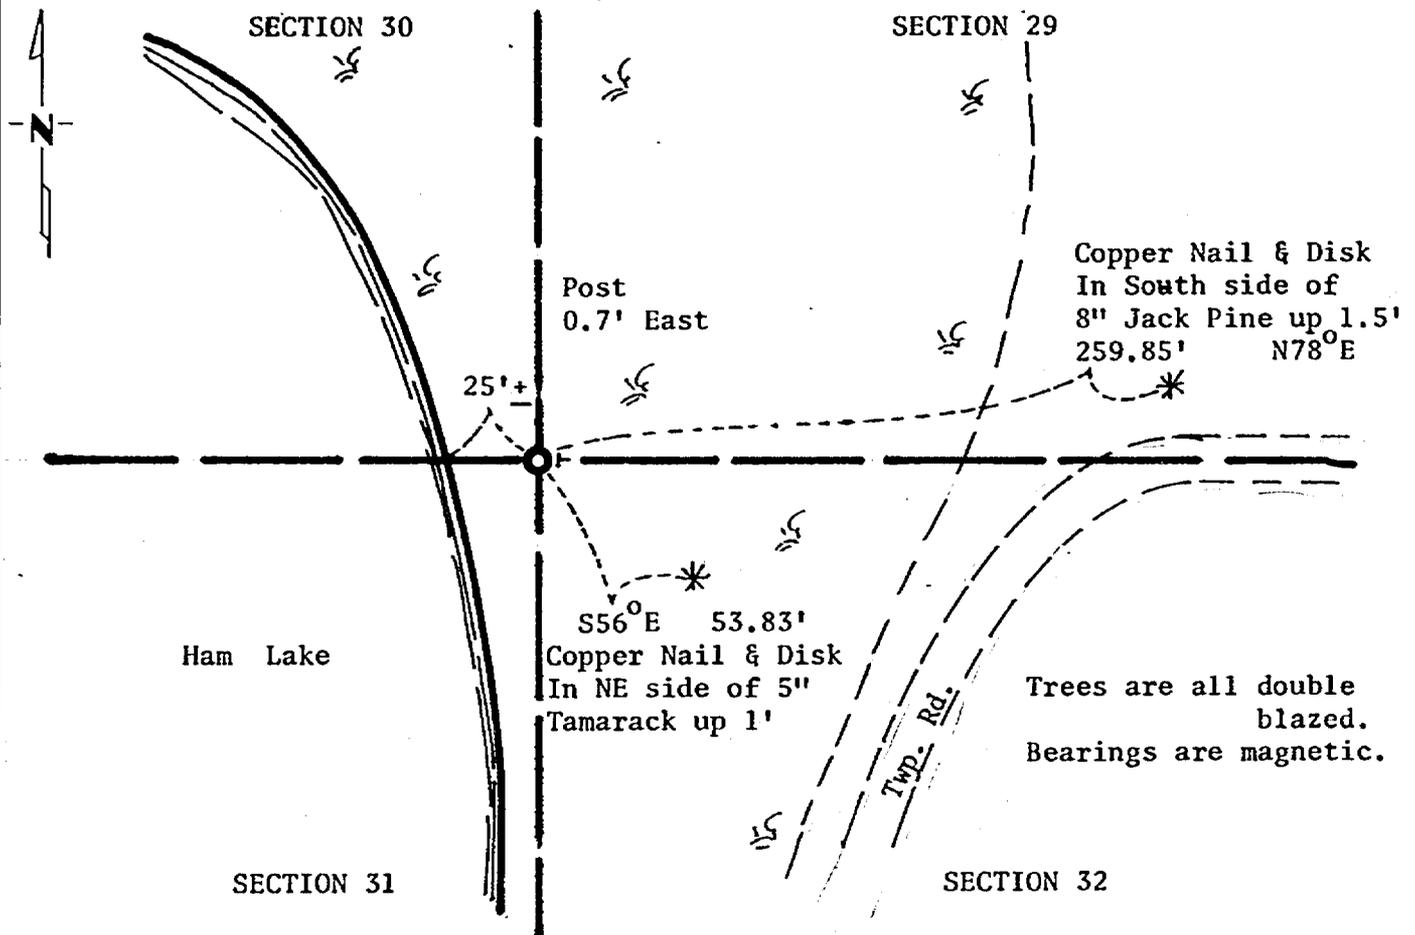

Statement of evidence relative to this corner location is on back of page. 267934

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 3/4/83
SIGNATURE DATE

Registration No. 11865

- Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:40 A.M. on the 4 day of April A.D., 1983

County Recorder Claudine Kayline

By MS, Deputy

DOCUMENT NO. 267934

Statement of Evidence: Northeast Corner Section 31, Township 140 North,
Range 30 West, 5th Principal Meridian.

The original Public Land Survey was run in 1865 and a wood post was set to mark the corner.

In 1928 and 1967 the Minnesota Highway Department found a 2" capped pipe at the corner and tied it to the highway alignment.

In 1966 Mr. Robert Schneider found the 2" capped pipe.

In 1981 the Minnesota Department of Transportation recovered the 2" capped pipe at the corner. This is the type of monument Mr. John Curo (County Surveyor) used between 1905 and 1917. We accept this as Mr. Curo's pipe but did not find the notes to verify it. The pipe agrees with our 1928 alignment distances and we accept this as the correct location for the corner.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Brainerd, Minnesota.

* County Surveyor's Records: In 1913, Mr. John Curo, Cass County Surveyor, set a 2x48" capped iron monument from the original Bearing Trees.