

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 6, Township 139N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 3/2/82 found a 2" cap pipe  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

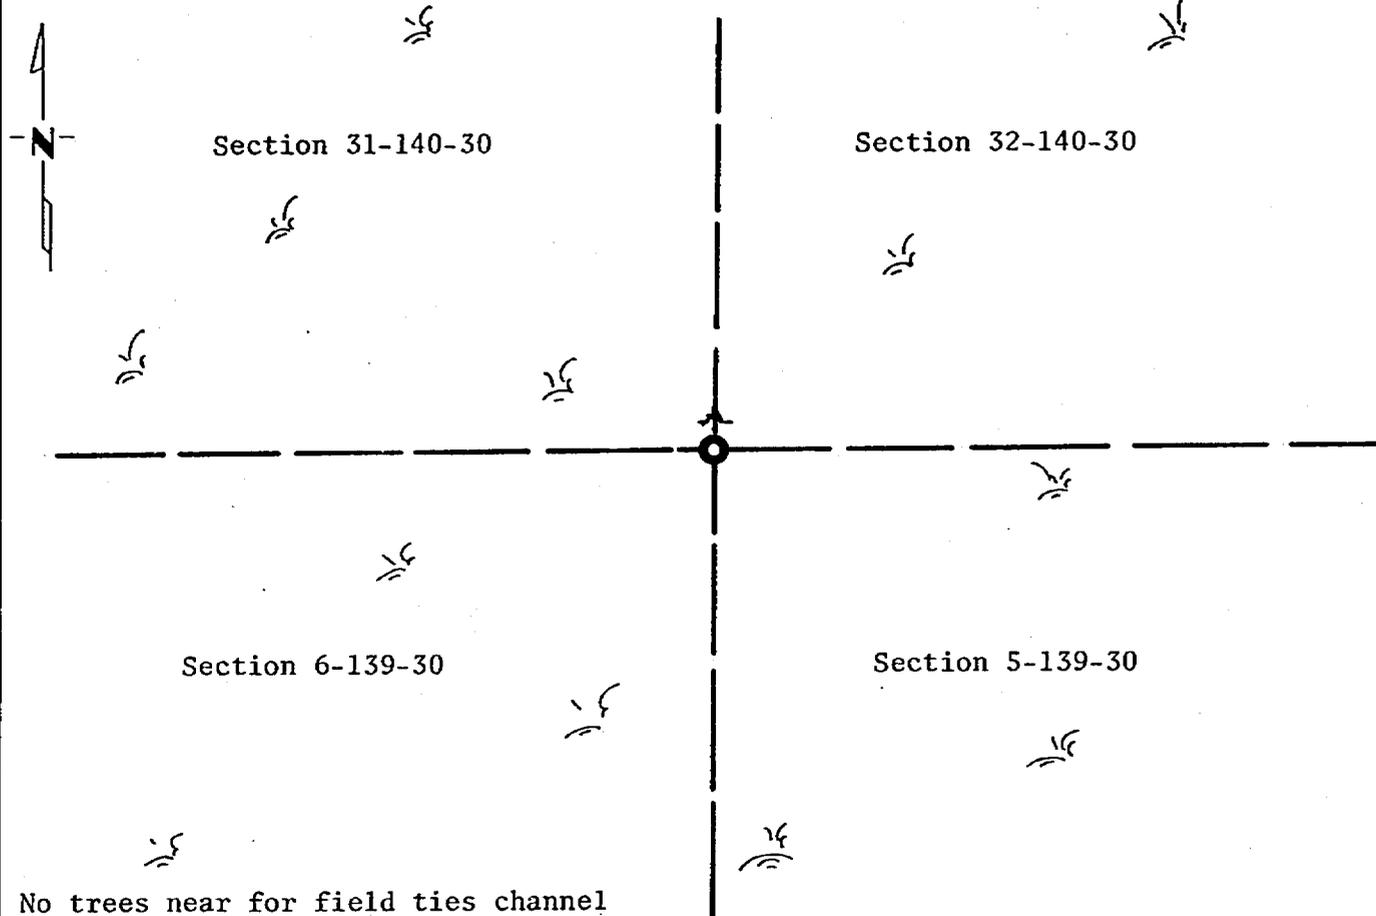

No trees near for field ties channel post 1' north.

Statement of evidence relative to this corner location is on back of page. 267940

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 3/4/83  
SIGNATURE DATE

Registration No. 11865

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

### OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:10 A.M. on the 4 day of April A.D., 19 83

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 267940

Statement of Evidence:

Northeast Corner of Section 6, Township 139 North, Range 30 West of the 5th Principal Meridian.

The original public land survey was run in 1865 and a wood post was set to mark the corner.

In 1922 Mr. J. Flynn used the corner in a survey of Section 6.

No other records were found relating to this corner.

In 1982 the Minnesota Department of Transportation found a 2" capped pipe at the corner. This is the type of monument Mr. John Curo (County Surveyor) used between 1905-1917. This location is compatible with the surrounding section corners.

The Minnesota Department of Transportation accepts the 2" iron pipe as the correct location for the corner.

For details and surveys analysis, contact the Minnesota Department of Transportation Surveys Office in Brainerd, Minnesota.

\* County Surveyor's Records: In 1913, Mr. John Curo, Cass County Surveyor, found the original bearing trees and set a 2x48" capped iron monument.