

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW 1/16 Corner of Section 18, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 3-4-1983 found a 1" iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

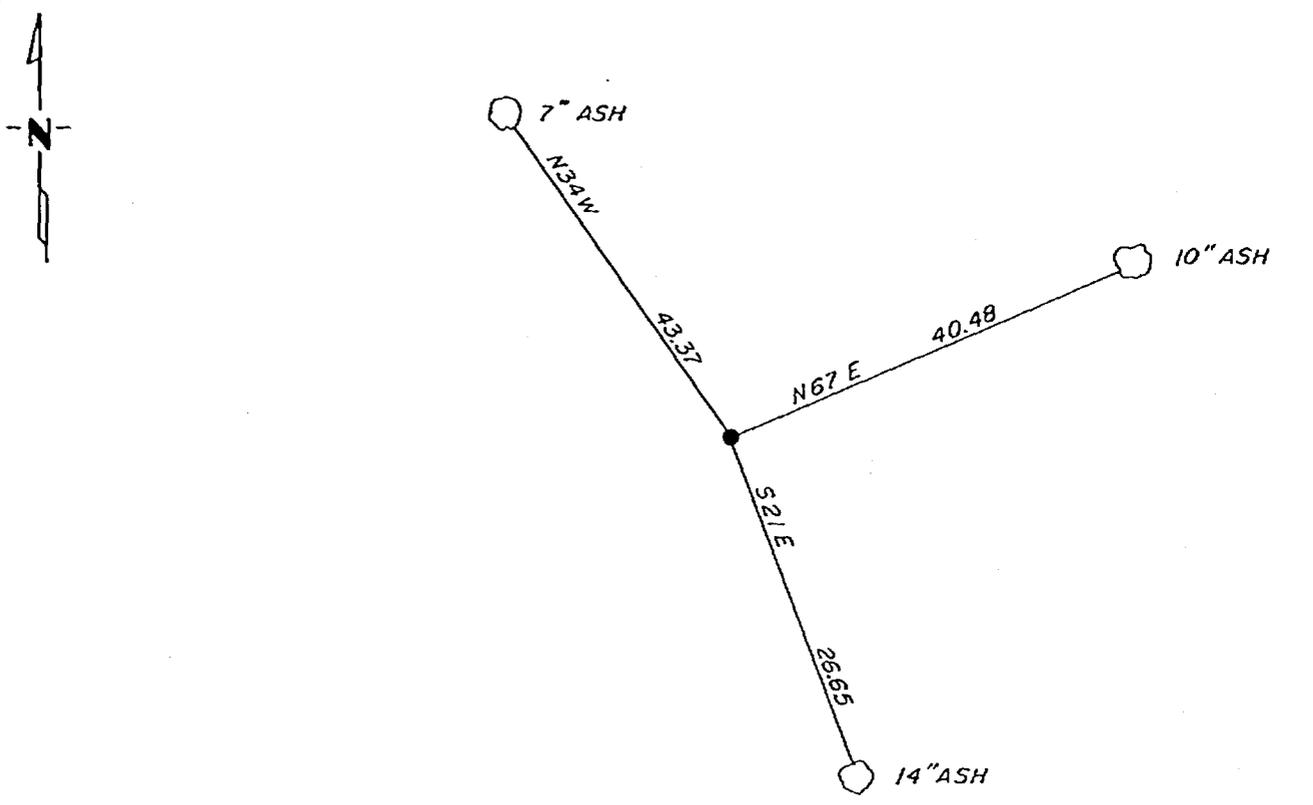

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 3-18-83
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

268848
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:25 P.M. on the 18 day of May A.D., 1983

Register of Deeds Claudine Koyler

By MS, Deputy

DOCUMENT NO. 268848

Statement of Evidence:

In 1919, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the SW 1/16 corner from which he marked the following bt's, a 8" elm N 69 W 31 links and a 10" elm S 12-15 E 27 links.

On 3-4-1983, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap. The 8" elm N 69 W 31 links is now an 18" tree and the 10" elm S 12-15 E is now a 20" tree. We mark new bt's as shown on the front.