

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E 1/4 Corner of Section 13, Township 143, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 2-1-1983 found a 1"x36" iron pipe with brass cap bent over  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 3-17-1983 placed a 2"x36" iron pipe with brass cap in place of  
DATE  
bent pipe

### SKETCH OF REFERENCE TIES

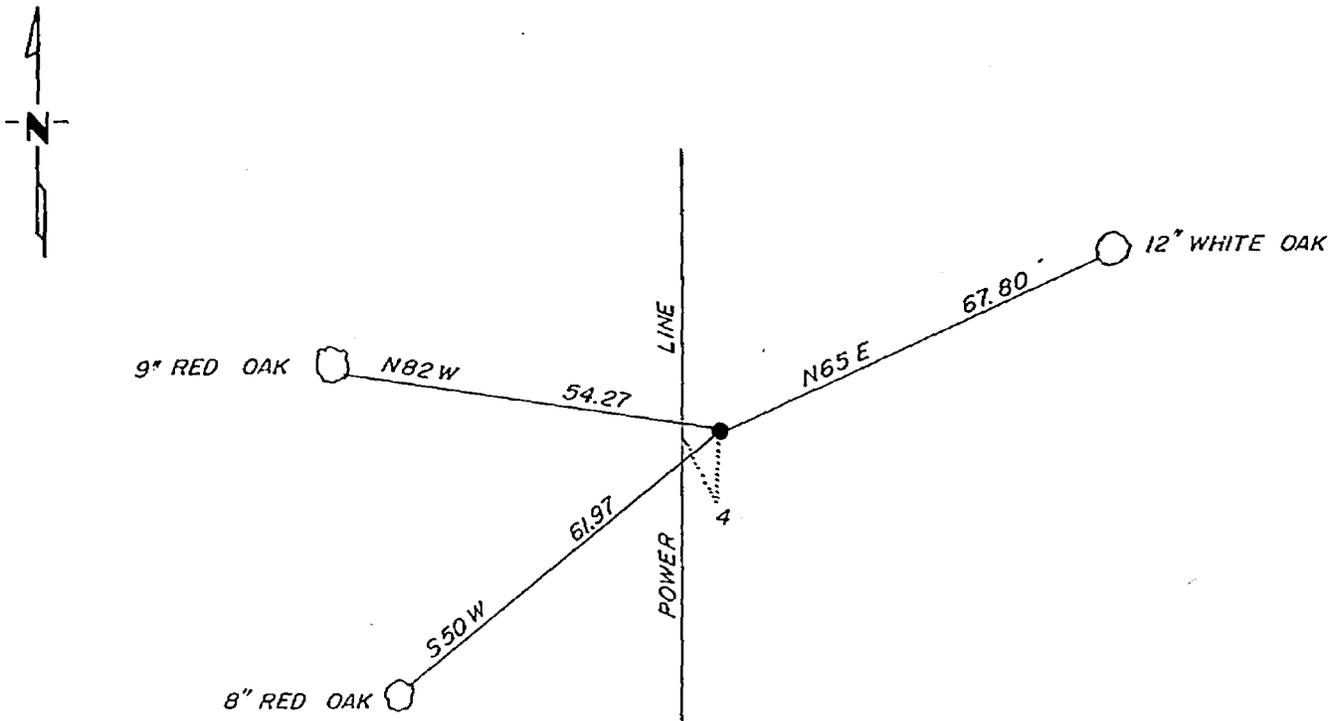

Statement of evidence relative to this corner location is on back of page. 268854

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Brown 3-18-83  
SIGNATURE DATE

Registration No. 11395

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:43 P.M. on the 18 day of May A.D., 1983

Register of Deeds Claudine Kaylor

By MS, Deputy

DOCUMENT NO. 268854

Statement of Evidence:

In 1919, Albinus N. Kimmel, a cadastral engineer set a 1"x36" iron pipe with brass cap for the W 1/4 corner from original evidence and marked the following bt's, a 6" red oak N 23-1/2 N 34 links and a 4" white oak N 2-1/2 E 18 links.

On 2-1-1983, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap bent over. As this corner is in cleared power line, we find no evidence of the original bt's or bt's made in 1919 survey. We remove the bent iron pipe and set a 2"x36" iron pipe with brass cap in its place from which we mark bt's as shown on the front.