

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South Quarter Corner of Section 8, Township 142 N, Range 26 W, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 08-23-83 placed a 2 inch by 24 inch concrete filled, galvanized iron  
DATE pipe, with a 3 inch diameter brass tablet, recessed 1 inch, stamped as shown.

Magnetic:  $5^{\circ}$  E. decl.

### SKETCH OF REFERENCE TIES

not to scale

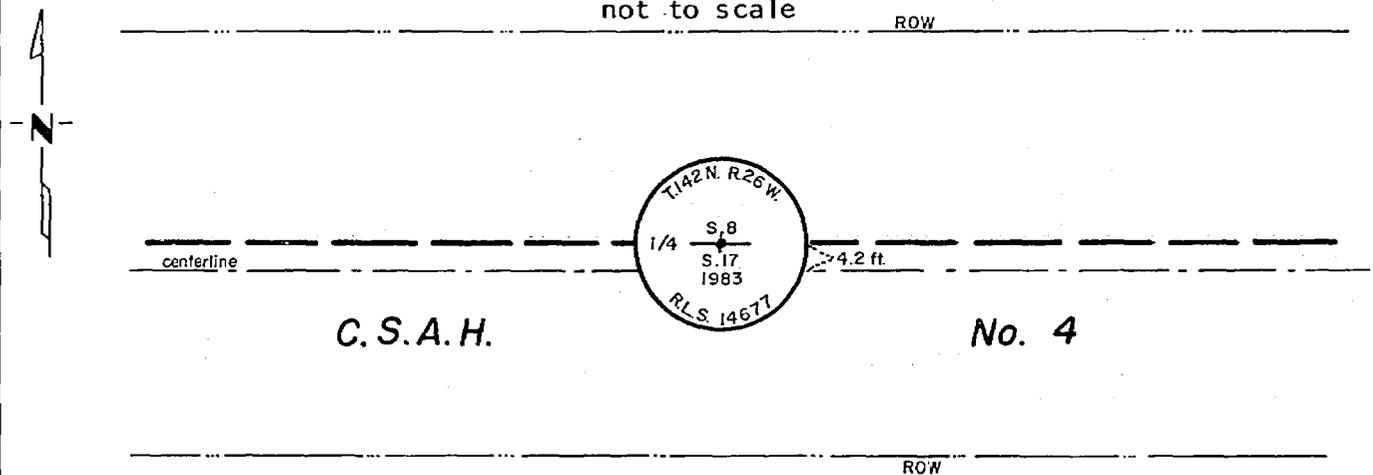

S  $51^{\circ}$  W, 117.15 ft. to a 16d nail in the northwesterly face of a 12.1 inch diameter Aspen, double blazed and scribed "1/4S17" and "BT".

S  $08^{\circ}$  W, 72.94 ft. to a 16d nail in the westerly face of an 8.2 inch diameter Birch, double blazed and scribed "1/4S17" and "BT".

All bearing trees are marked with red enamel and a USFS 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Kenneth L. Whitton

Date 3-5-84 Registration No. 14677

274371  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:50 A .M. on the 19 day of March A.D., 1984

County Recorder Clouline Kaylor  
By MS, Deputy

DOCUMENT NO. 274371

Statement of Evidence: The South Quarter Corner of Section 8, Township 142 North, Range 26 West of the 5th Principal Meridian.

This corner was originally established on November 20, 1872, by Eli W. Griffin, Deputy Surveyor. The notes of this survey are on file in the Office of the Secretary of State, St. Paul, Minnesota. Mr. Griffin set a post to mark the corner position and witnessed the position by marking: an 8 inch diameter White Birch that bears NORTH 68 degrees EAST, a distance of 11 links (7.62 feet); and an 8 inch diameter White Birch that bears SOUTH 11 degrees EAST, a distance of 21 links (13.86 feet).

The notes of the "Slater Township Road " survey by James H. Flynn in 1916 are on file in the Office of the Cass County Recorder, Walker, Minnesota, in Book C, page 164, as Survey Record No. 411. These notes indicate that the evidence of the original corner position are "...obliterated by time and fires. Therefore put in new B.T.s equidistant bet. N.W. and N.E. cor.s Sec. 17...". The notes then list the following as witnesses: a 12 inch diameter Norway Pine stub that bears NORTH 33 degrees EAST, a distance of 55.0 feet; and a 7 inch diameter White Pine stub that bears SOUTH 14 degrees EAST, a distance of 59.0 feet. The stationing in the notes indicate that the distance east from this established corner to the Southeast Corner of Section 8 is 2648 feet and to the Southwest Corner of Section 8 was 2652 feet.

The James H. Flynn Subdivision of Section 8 is recorded as Survey No. 446, Book C, page 387, in the Office of the Cass County Recorder, Walker, Minnesota. These notes, dated 1920, indicate that a 1.5 inch by 44 inch iron monument was set 2646 feet east of the Southeast Corner of Section 8 to mark this corner position. No mention of any bearing trees or Mr. Flynn's previous survey data (1916) concerning this corner position are mentioned.

On August 23, 1983, after determining this corner to be lost, the corner position was monumented in the single proportionate position, as shown in the sketch.