

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 4, Township 139, Range 29, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 7/14/81 found a 2" iron pipe 0.20 below gravel surface driveway
24' west centerline township road

left monument as found, lowered monument, removed monument (explain)

On 7/16/84 placed a 4" cast iron monument 0.50 feet below surface

SKETCH OF REFERENCE TIES

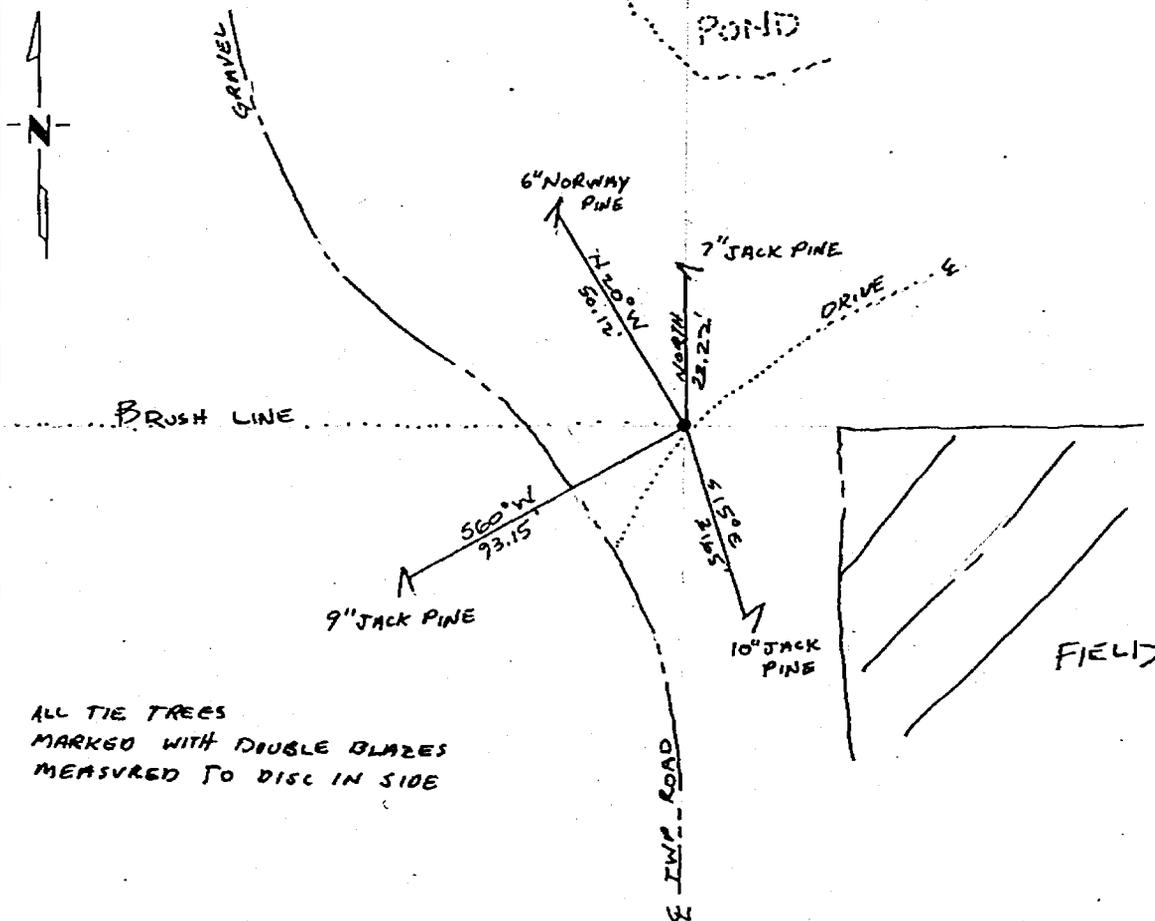

ALL TIE TREES
MARKED WITH DOUBLE BLAZES
MEASURED TO DISC IN SIDE

Statement of evidence relative to this corner location is on back of page.

276697

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary L. Anderson 7/30/84
SIGNATURE DATE

Registration No. 7452

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:55 A.M. on the 31 day of July A.D., 19 84

County Recorder Claudine Kayler

By MS, Deputy

DOCUMENT NO. 276697

Statement of Evidence:

Original Government Survey

Corner set in 1865 by Wright & Walker

in 1912 John Curo set wood stake proportionally.

in 1973 Myron Landecker, Registered Surveyor #7452, used this corner in subdivision in Section 3, Township 139, Range 29.

In 1976 and 1977 Myron Landecker used same corner in survey in Section 4, Township 139, Range 29.

On 7/14/81 Myron Landecker used this same corner for section subdivision of Section 4, Township 139, Range 29 and believes this to be a perpetuation of said corner as established through previous surveys.