

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E 1/4 Corner of Section 2, Township 139, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10-10-84 placed a 2" square cass county monument with
DATE aluminum cap

SKETCH OF REFERENCE TIES

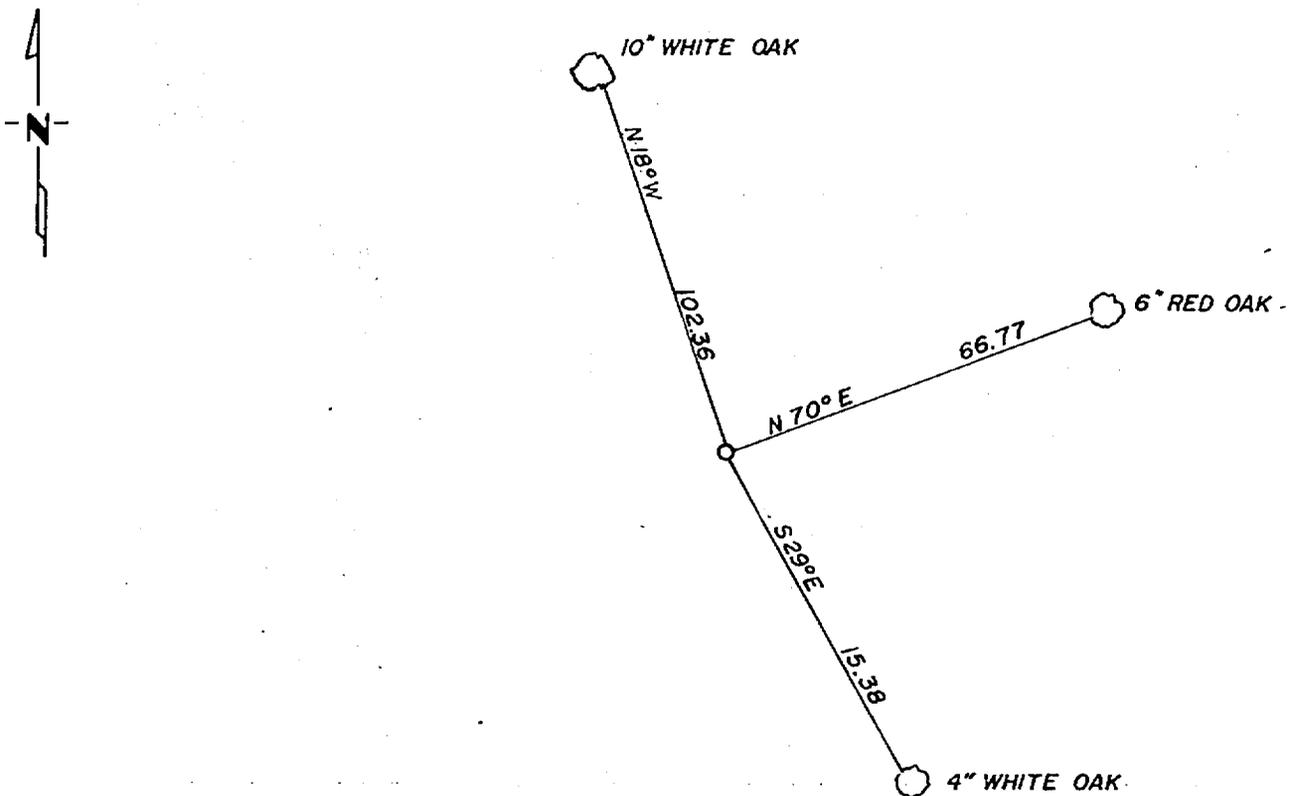

not to scale

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Wally E. Cass 10-30-84
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

278538
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:10 A.M. on the 31 day of Oct. A.D., 1984

Register of Deeds Chloé Kayler County Recorder

By ms, Deputy

DOCUMENT NO. 278538

Statement of Evidence:

In 1913 Kemp measured a mile from the West Quarter corner of Section 2 and found both stumps of the original bearing trees, a Norway Pine 22 inches North 27 degrees East 93.72 feet and a White Pine 24 inches South 49 degrees 30 minutes West 60.72 feet and set a 3"x3"x24" pine stake for this corner and marked new bearing trees as follows:

A 10 inch Norway Pine North 75 degrees 15 minutes East 41.85 feet and a 11 inch Jack Pine stump North 33 degrees 35 minutes West.

In 1984 Walter E. Curo found the remains of the 22 inch Norway Pine stump North 27 degrees East 93.72 feet and the remains of the 10 inch Norway Pine North 75 degrees 15 minutes East 41.85 feet.

We set a 2 inch square x 36 inch iron pipe monument with a aluminum cap and marked new bearing trees as shown on the front.