

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


REFERENCE FOR
SOUTHEAST Corner of Section 35, Township 141, Range 29, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6/18/83 placed a 2" x 36" galvanized iron pipe with a 3" marked brass
DATE cap.

SKETCH OF REFERENCE TIES

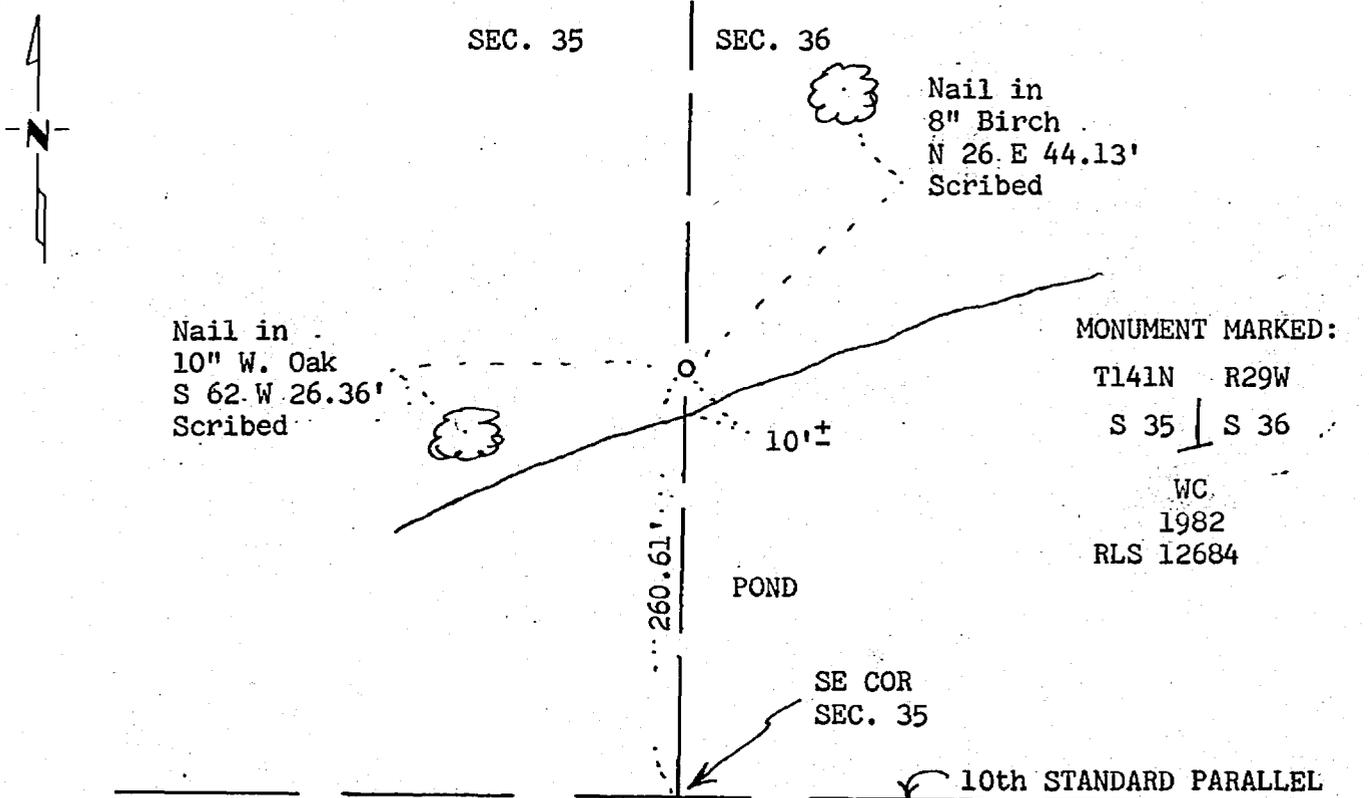

BEARINGS ARE APPROXIMATE MAGNETIC

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam H. Stever 6/20/83
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279158
OFFICE OF THE COUNTY RECORDER
County of Law

I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 3 day of Dec. A.D., 1984

County Recorder Claudine Kayler
By MS, Deputy

DOCUMENT NO. 279158

Statement of Evidence:

No corner was established at this position on the line between Sections 35 and 36 by the original GLO survey in 1973. The southeast corner of Section 35 was originally established by the GLO survey of the 10th Standard Parallel in 1863. The corner fell in a pond and a witness corner was set 4.51 chains to the west.

In 1983, I ran a line between the NE corner of Section 35 and the computed SE corner of Section 35 on the standard parallel. A 2" x 36" galvanized iron pipe with a 3" marked brass cap was set as a reference to the section line on the north side of the pond. This point is 260.61 feet north of the SE corner. A steel sign post was set 2.6 feet south of the monument. Two bearing trees were taken as shown on this certificate.