

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


W 1/16 Corner of Section 12, Township 143, Range 30, 5 P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 8-10-83 found a 1" x 36" IRON PIPE MONUMENT WITH BRASS CAP STANDING
DATE
IN GOOD CONDITION
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

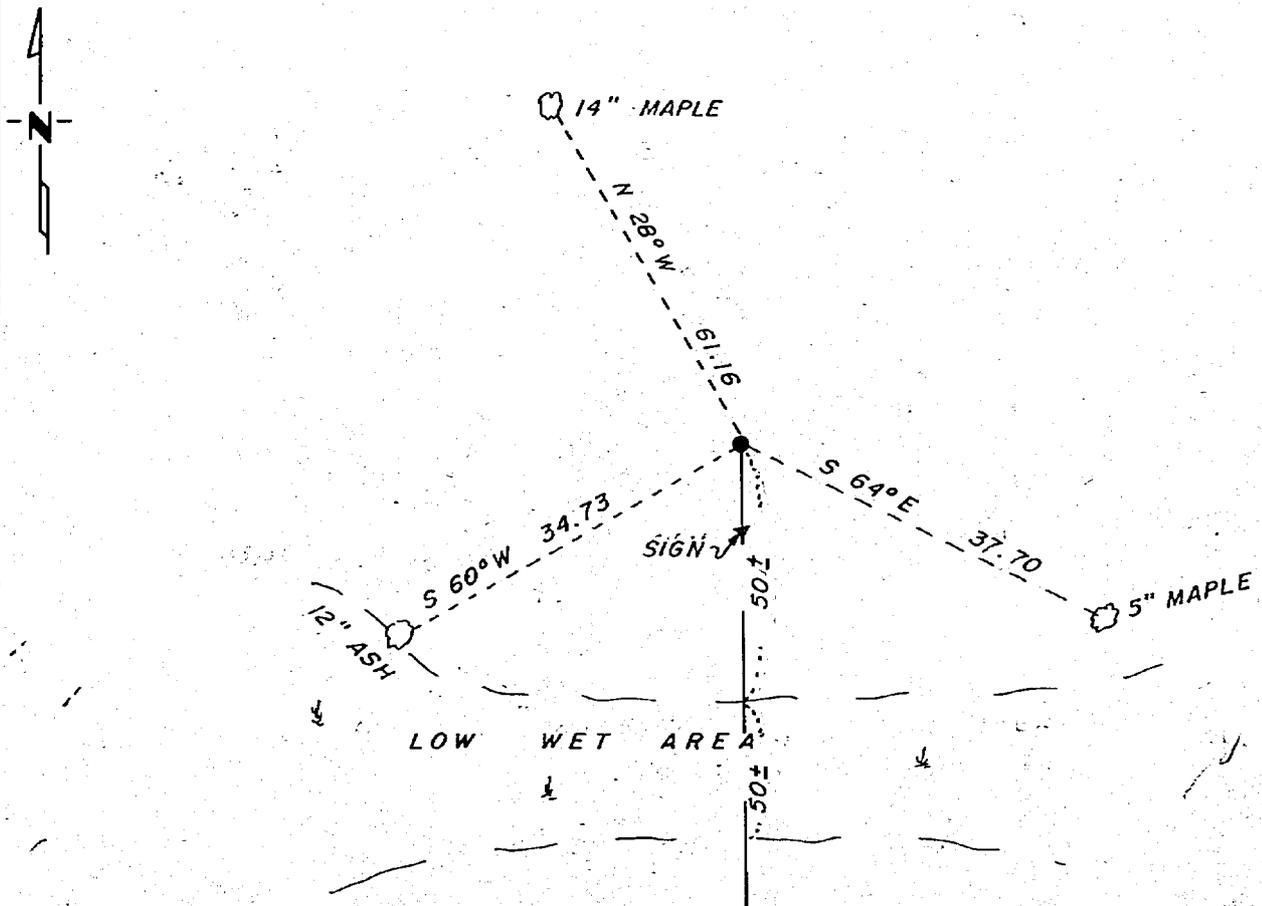

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter S. Curo 8-16-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279159
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:35 A.M. on the 3 day of Dec. A.D., 1984

Register of Deeds Chloé Kayler

By MS, Deputy

DOCUMENT NO. 279159

Statement of Evidence:

IN 1924, EARL G. HARRINGTON, A U.S. CADASTRAL ENGINEER, SET A 1" x 36" IRON PIPE WITH BRASS CAP FOR THE WEST 1/16 CORNER ON THE NORTH LINE OF SECTION 12, FROM WHICH HE MARKED THE FOLLOWING BEARING TREES: A MAPLE 12" NORTH 65 DEGREES EAST, 53 LKS AND A MAPLE 8" SOUTH 76 DEGREES WEST, 29 LKS.

ON 8-10-83, WALTER E. CURO, KEN METCALE AND GREG CURO, FOUND THE IRON 1" IRON PIPE WITH BRASS CAP STANDING IN GOOD CONDITION A LARGE MAPLE BEARS NORTH 65 DEGREES EAST 35 FEET AND ALLARGE MAPLE BEARS SOUTH 76 DEGREES WEST 19 FEET, WE MARK NEW BEARING TREES AS SHOWN ON FRONT.