

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER EAST SIXTEENTH Corner of Section 8, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/8/80 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

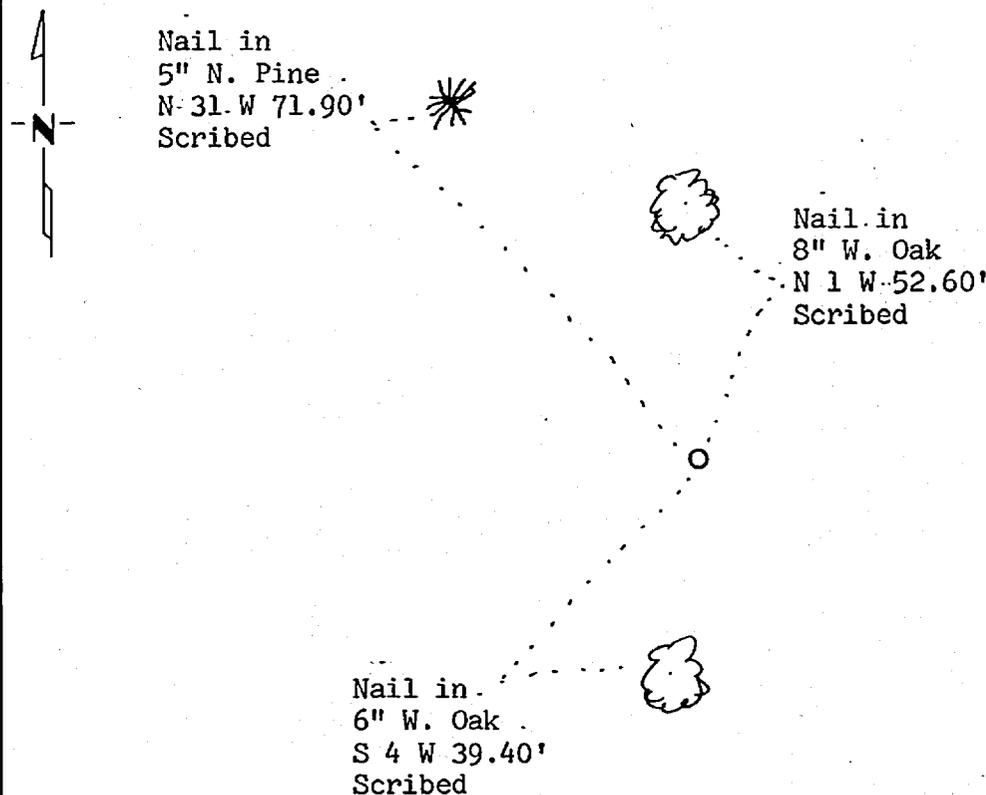

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Gay H. Stevenson 9-14-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

279225
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:00 A.M. on the 5 day of Dec. A.D., 19 84

County Recorder Claudia Kaylor

By MS, Deputy

DOCUMENT NO. 279225

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" W. Oak N 41-30 E 53 links and 6" R. Oak S 53-15 W 87 links.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 12". The following bearing trees were found: 14" W. Oak snag N 41 E 35.0' and remains of R. Oak stump S 53 W 57.4'. Three new bearing trees were marked and are shown on this certificate. A steel fence post was set 3.0' north of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.