


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST SIXTEENTH Corner of Section 8 & 17, Township 141, Range 27, 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/2/80 found a GLO brass cap monument as set in 1919.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

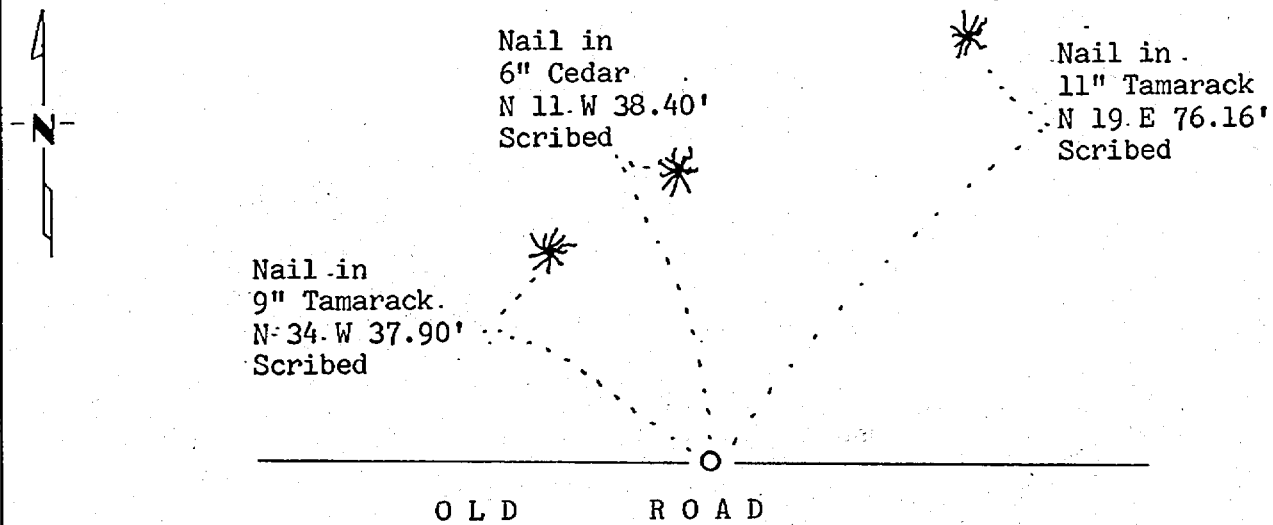

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ray H. Stevenson 9-14-82  
SIGNATURE DATE

- Registration No. 12684
- Land Surveyor,  Professional Engineer
  - County Surveyor,  County Engineer

279229  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:20 A .M. on the 5 day of Dec. A.D., 19 84

County Recorder Clairine Kayler  
 By MS, Deputy

DOCUMENT NO. 279229

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 5" Cedar S 65-30 W 146 links.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument down 4" below road surface at north shoulder of east-west road. The following bearing trees were found: Cedar stump S 65 W 96.6'. Three new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.