

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CENTER QUARTER Corner of Section 18, Township 141, Range 27, 5th P.M.  
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 1980 found a GLO brass cap monument as set in 1919.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

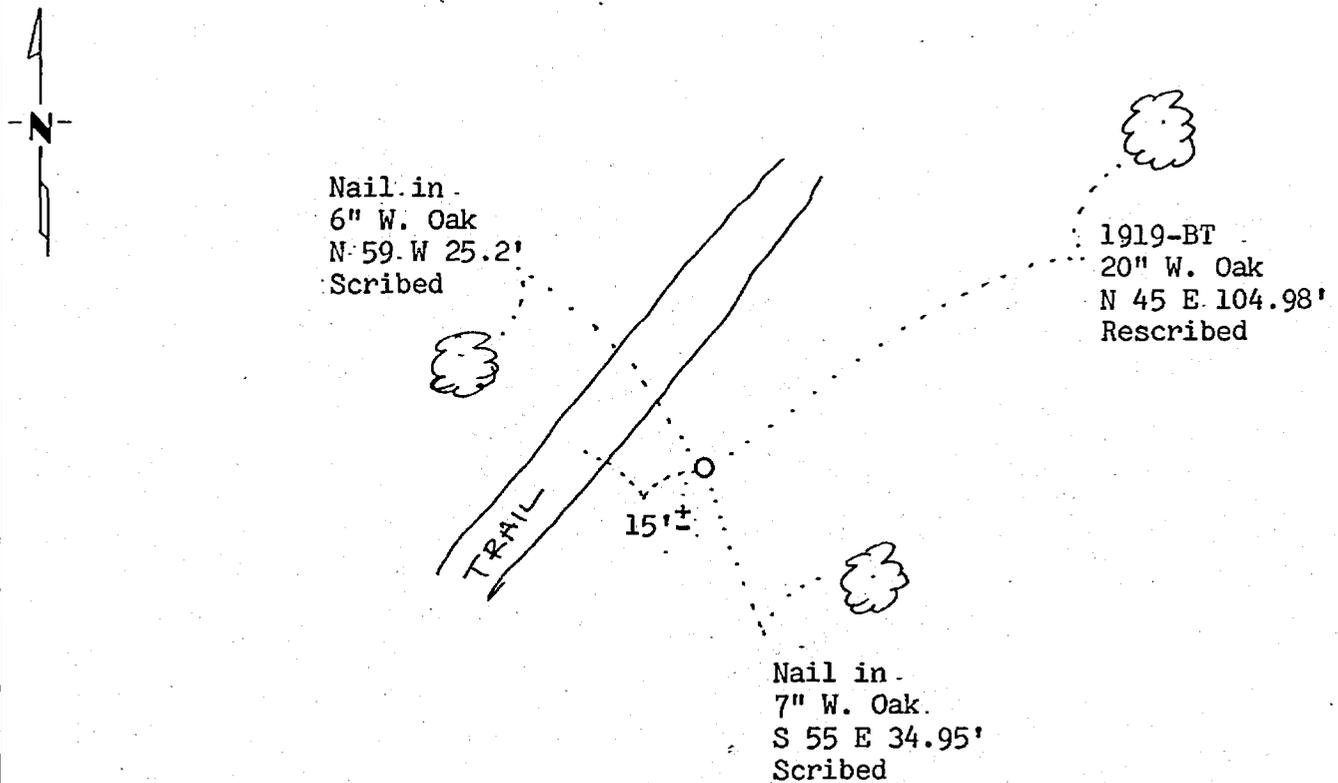

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Samy H. Stevenson 9-14-82  
SIGNATURE DATE

Registration No. 12684

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

279232  
OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A.M. on the 5 day of Dec. A.D., 1984

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 279232

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 14" W. Oak N 45-15 E 159 links and 10" Poplar N 56-15 W 100 links.
- 1922 County Surveyor's Record Book D pages 75 show survey by J.H. Flynn. Notes show Government iron found at corner.
- 1980 U.S. Forest Service technician J. Schoonover found the corner monumented with a GLO brass cap monument in good condition up 12". The following bearing trees were found: 20" W. Oak N 45 E 105.0'. No evidence was found of the Poplar. Two new bearing trees were marked and are shown on this certificate. Placed rocks around the monument.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.