

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WITNESS CORNER TO
E-W $\frac{1}{4}$ LINE CC


Corner of Section 16, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/9/80 found a GLO brass cap monument as set in 1919 bent
DATE
over in marsh.
- left monument as found, lowered monument, removed monument (explain)
- On 9/9/80 placed a 2" x 60" galvanized iron pipe with a 3" marked
DATE
brass cap.

SKETCH OF REFERENCE TIES

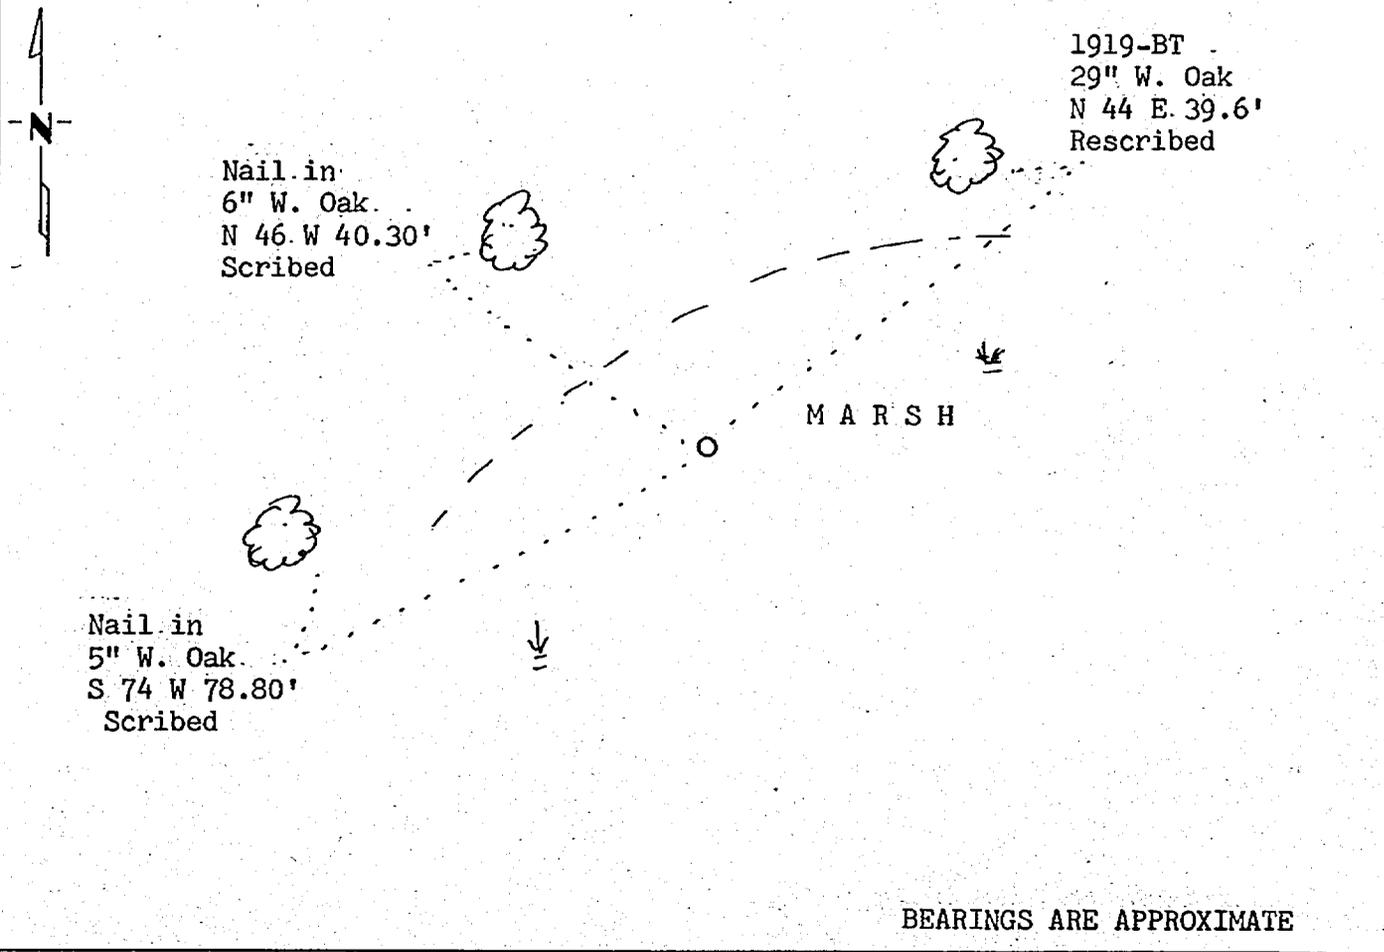

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-15-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279234
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:45 A.M. on the 5 day of Dec. A.D., 1984

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 279234

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 18" W. Oak N 0-30 E 60 links and 14" W. Oak S 24 W 134 links. The notes show this corner set as a witness corner N 88-46 W 5.36 chains of the true position.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument bent over in marsh. Tried to straighten pipe, but it broke into two pieces. In place of the old iron set a 2" x 60" galvanized iron pipe with a 3" marked brass cap. Old pieces of pipe reset along side. The following bearing trees were found: 29" W. Oak N 44 E 39.6' cut open and scribe found and 18" W. Oak S 74 W 88.4' cut down and scribe found. Two new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.
- NOTE: Bearings to bearing trees were recorded wrong in the 1919 GLO resurvey, but distances recorded checked good.