

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


CENTER SOUTH SIXTEENTH Corner of Section 17, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/10/80 found a GLO brass cap monument bent out of position.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/10/80 placed ~~a~~ the same GLO brass cap monument from 1919
DATE
bearing trees.

SKETCH OF REFERENCE TIES

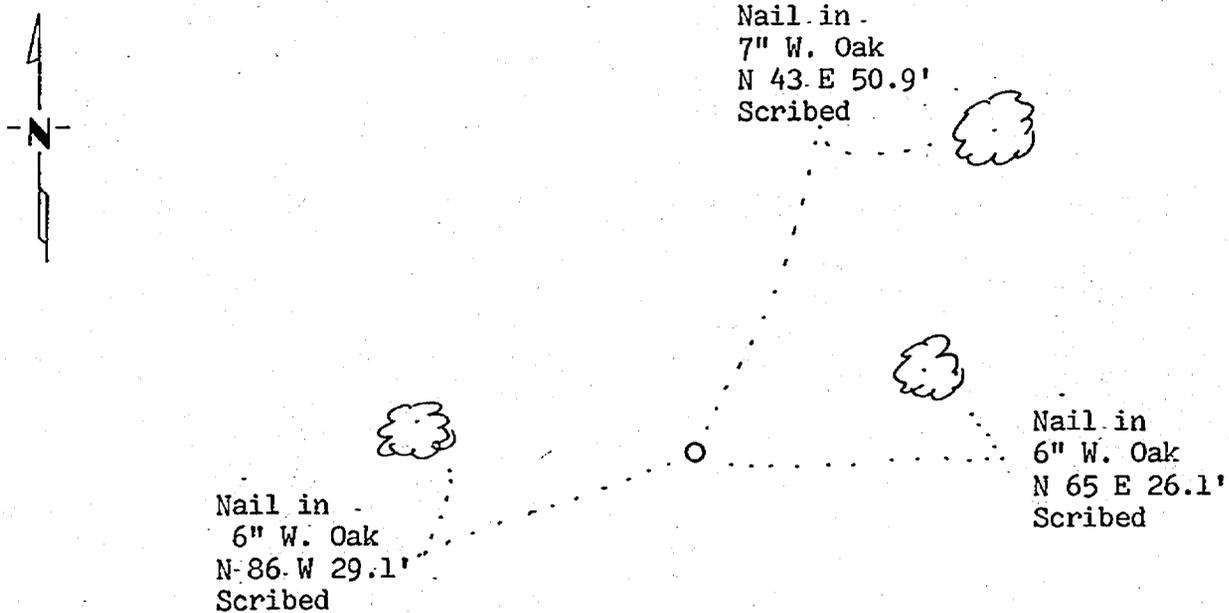

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dany H. Stevenson 9-14-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279270
OFFICE OF THE COUNTY RECORDER
County of Law

I hereby certify that this document was filed in the Co. Recorders office at 3:52 P.M. on the 5 day of Dec. A.D., 19 84

County Recorder Cloude Kayler

By MS, Deputy

DOCUMENT NO. 279270

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" W. Pine S 89-15 E 39 links and 10" W. Pine S 1-45 W 61 links.
- 1980 U.S. Forest Service technician J. Schoonover found the corner monumented with a GLO brass cap monument bent out of position. Straightened iron and reset using the distances to the stumps of the two 1919 bearing trees. The following bearing trees were found: 12" W. Pine stump S 89 E 25.7' with scribe visible and 12" W. Pine stump S 2 W 40.3'. Three new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.