

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

A.P. #3 of TR 1370 Corner of Section 20, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/23/80 found a GL0 brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

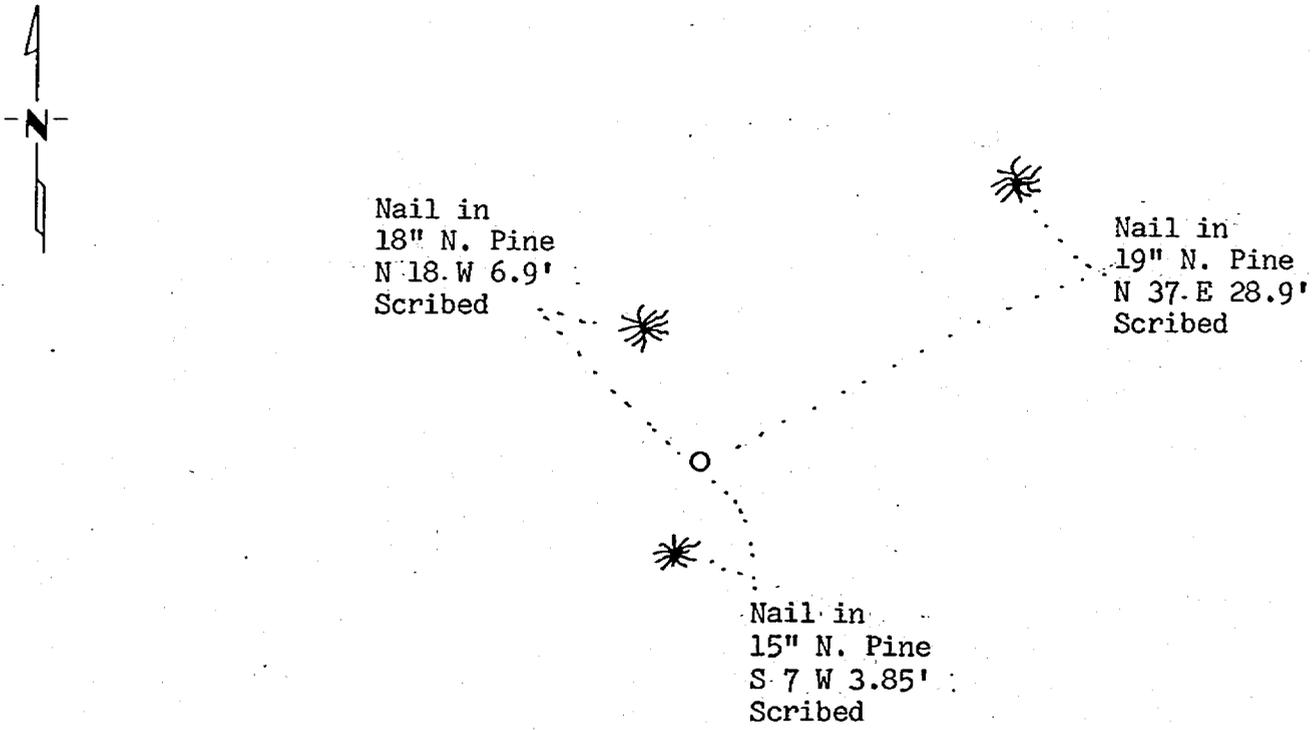

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify, that this document and the data contained herein was prepared by me or under my direct supervision.

Amy H. Stevenson 9-15-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279334
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:10 A .M. on the 10 day of Dec A.D., 1984

County Recorder Claudia Kayler

By MS, Deputy

DOCUMENT NO. 279334

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 8". Three new bearing trees were marked and are shown on this certificate.
- 1981 U.S. Forest Service technicians ran line from the CN 1/16 corner of Section 20 west through this corner to the NW 1/16 corner of Section 20. This monument fit good for line and rough distance check also checked with the 1919 GLO resurvey record.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument-as marking the corner location as when set in 1919 by the GLO resurvey.