


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

A.P. #4 of TR 1430 Corner of Section 20, Township 141, Range 27, 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/23/80 found a GLO brass cap monument as set in 1919.  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

### SKETCH OF REFERENCE TIES

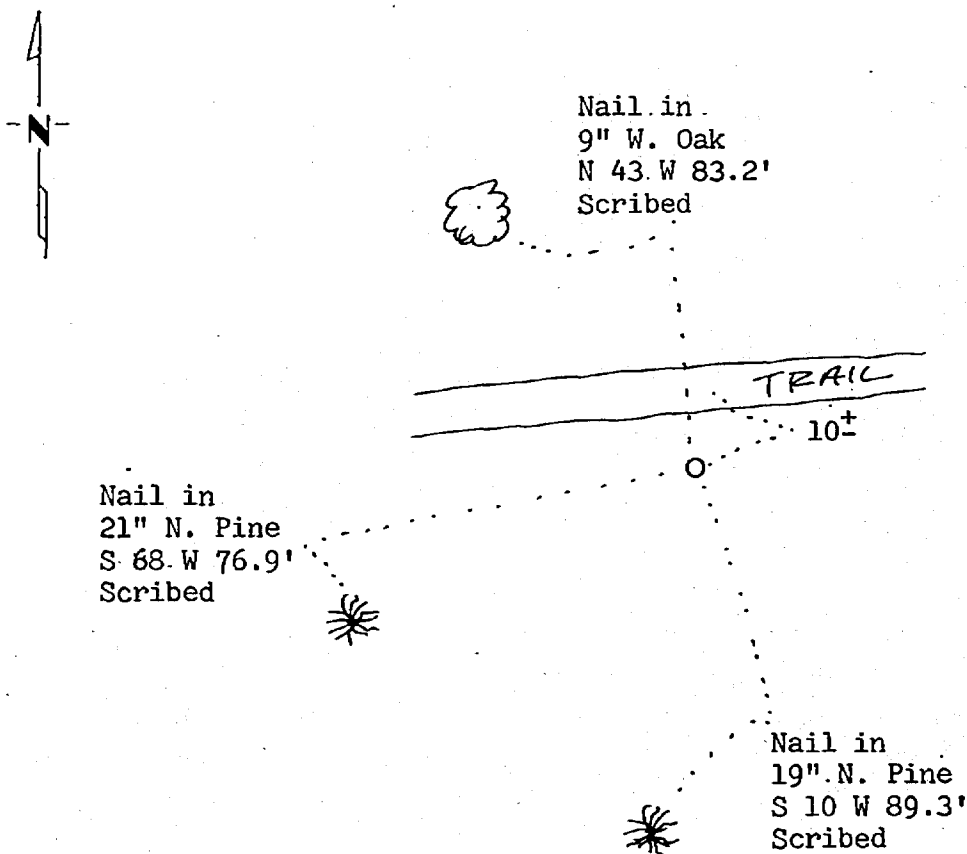

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mary H. Stevenson 9-15-82  
SIGNATURE DATE

Registration No. 12684

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

279339  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:35 A.M. on the 10 day of Dec. A.D., 1984

County Recorder Claudine Kayler  
 By MS, Deputy

DOCUMENT NO. 279339

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner. and an iron pipe with a marked brass cap was set to mark the corner.
- 1980 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 6". Three new bearing trees were marked and are shown on this certificate.
- 1981 U.S. Forest Service technicians ran line from CW 1/16 of Section 20 through this corner to the quarter corner of Sections 19 and 20. Monument agreed very good with line and rough distance check compared to the 1919 GLO resurvey record.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the U.S. Forest Service information indicates that the monument was found in the same position as when set in 1919.