

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


SOUTH SIXTEENTH Corner of Section 19&20, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 9/16/80 found a GLO brass cap monument as set in 1919.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

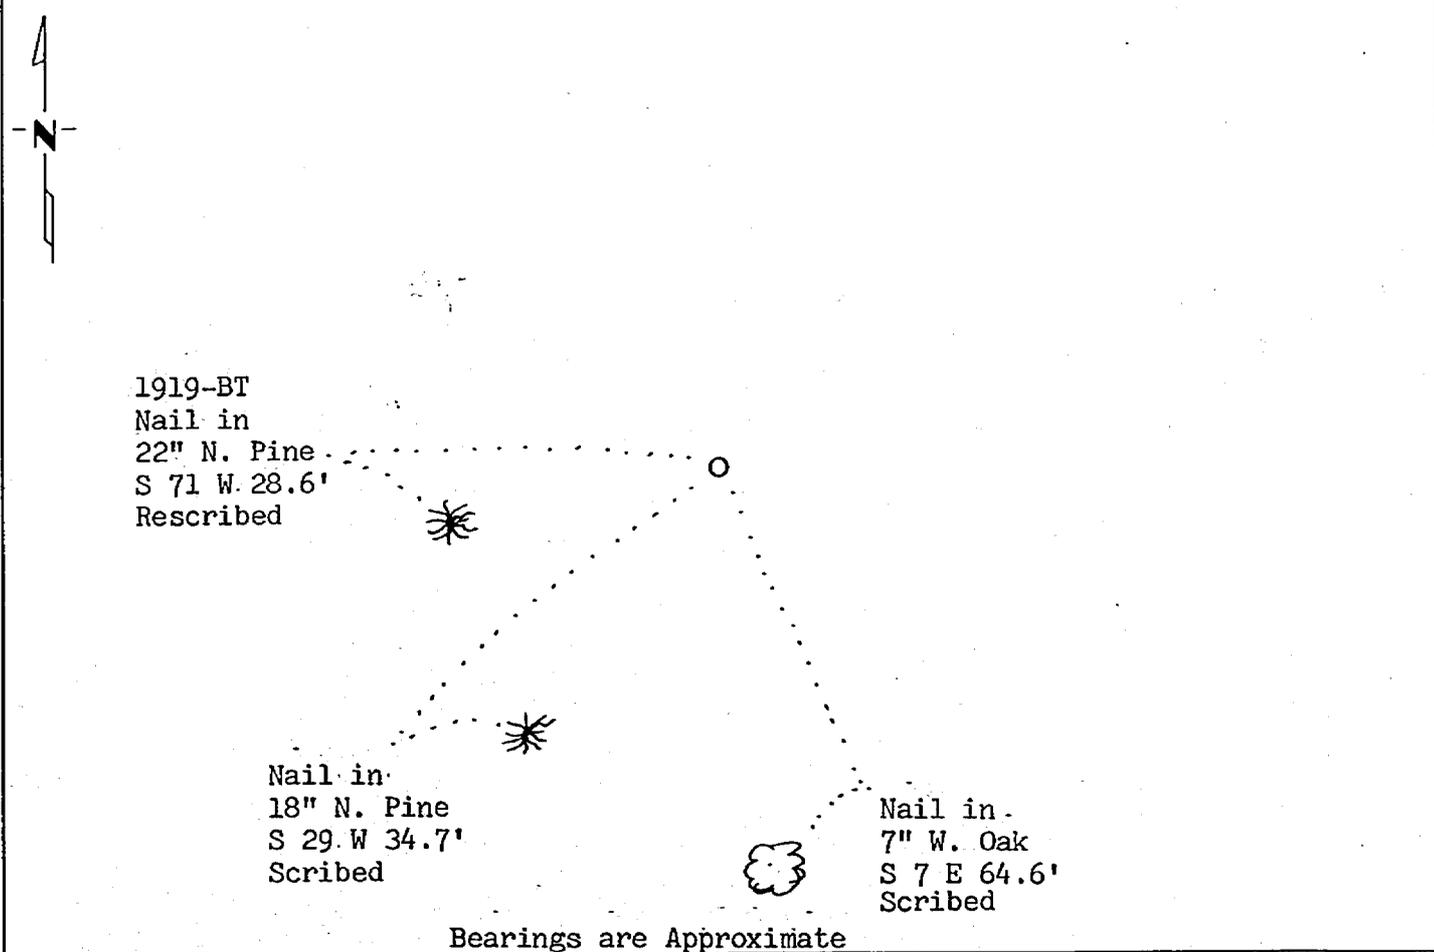

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Dany H. Stevasen 9-15-82
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

279342

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 8:50 A.M. on the 10 day of Dec. A.D., 19 84

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 279342

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 10" N. Pine S 28-30 E 89 links and 8" N. Pine S 70-45 W 43 links.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 14". The following bearing trees were found: 22" N. Pine S 71 W 28.4' with overgrown scar and remains of N. Pine stump, burned, S 28 E 58.7'. Two new bearing trees were marked and are shown on this certificate.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.