

2

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

South quarter Corner of Section 35, Township 139, Range: 29, 5 P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 1-23-85 placed a 2" x 2" x 36" Square Cass County iron  
DATE pipe monument with aluminum cap for the South  $\frac{1}{4}$  corner of Sec. 35.

## SKETCH OF REFERENCE TIES

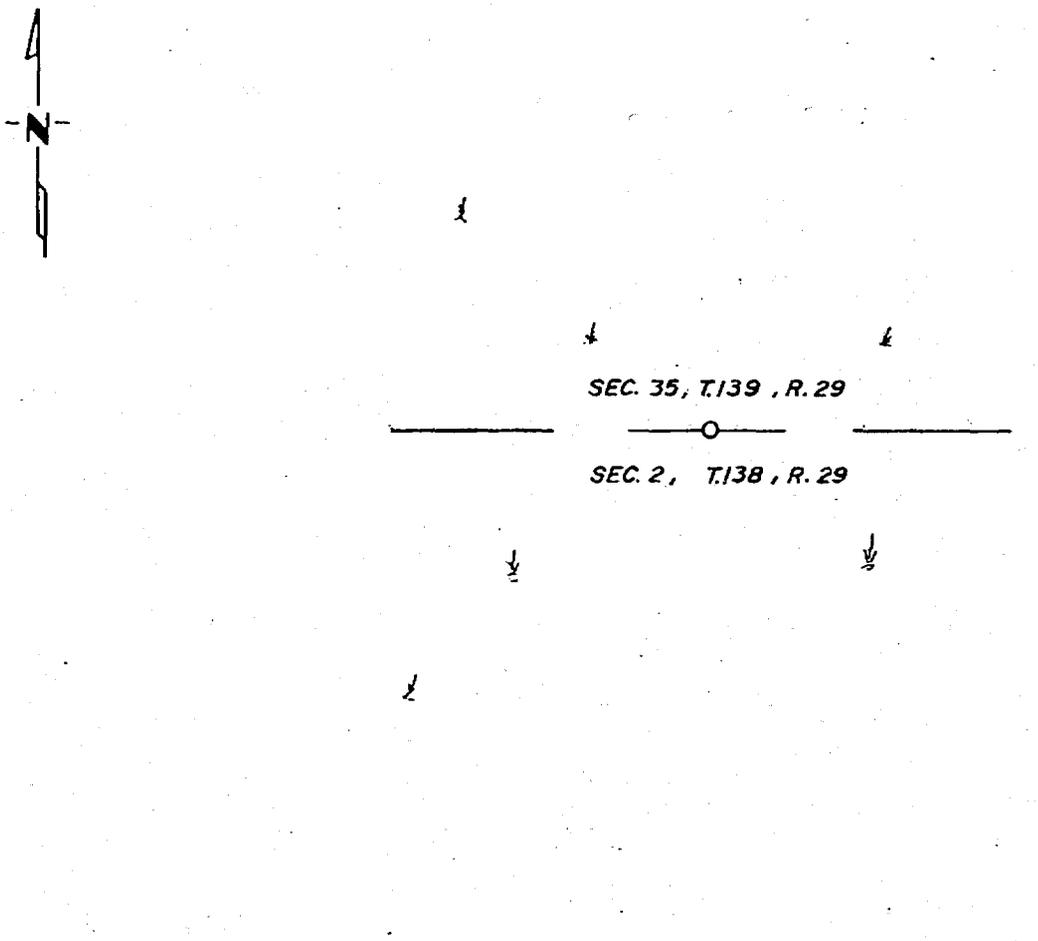

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Linn 2-5-85  
SIGNATURE DATE

Registration No. 11395

Land Surveyor,  Professional Engineer

County Surveyor,  County Engineer

280480  
OFFICE OF THE REGISTER OF DEEDS  
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:00 P.M. on the 22 day of February A.D., 1985

Register of Deeds Clairine Koyler  
By MS County Recorder Deputy

DOCUMENT NO. 280480

Statement of Evidence:

IN 1863 A POST WAS SET IN THE ORIGINAL SURVEY WITH THE FOLLOWING BEARING TREES MARKED. A TAMARACK 10" NORTH 15 EAST 36 LINKS AND A WHITE PINE 15" SOUTH 61 EAST 54 LINKS.

IN 1929, JOHN W. CURO, A REGISTERED LAND SURVEYOR SEARCHED FOR THIS CORNER AND FOUND NO EVIDENCE OF IT OR OF THE BEARING TREES.

ON JANUARY 23, 1985, WALTER E. CURO, A REGISTERED LAND SURVEYOR SET A 2" x 2" x 36" SQUARE CASS COUNTY IRON PIPE MONUMENT WITH ALUMINUM CAP FOR THE SOUTH QUARTER CORNER OF SECTION 35 AT A SINGLE PROPORTIONATE POSITION BETWEEN THE SOUTH QUARTER CORNER OF SECTION 34 AND THE WITNESS MEANDER CORNER ON THE SOUTH LINE OF SECTION 36 ON THE EAST SIDE OF JAIL LAKE THERE ARE NO TREES WITHIN A REASONABLE DISTANCE SO NO BEARING TREES WERE MARKED.