


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness _____ Corner of Section 35, Township 139, Range 29, 5 P.M.
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 1-22-85 placed a 2" x 2" x 36" Square cast
DATE
pipe monument with aluminum cap for a witness section corner

SKETCH OF REFERENCE TIES

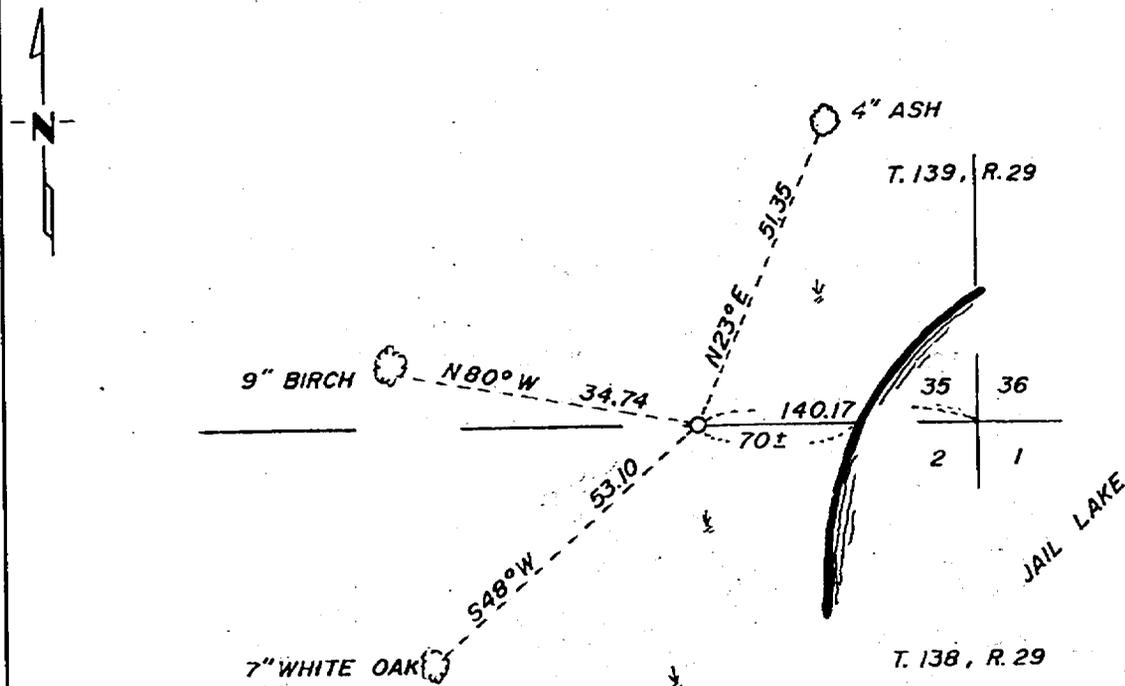

Note: Distances are to nails that are driven in the side of the trees and all trees have a 4"x5" aluminum tag nailed on them.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Ross 2-11-85
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

280481
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:15 P. M. on the 22 day of February A.D., 1985

Register of Deeds Claudia Kayler
County Recorder
 By MS, Deputy

DOCUMENT NO. 280481

Statement of Evidence:

In 1863 a post was set in the original survey for the Southeast corner of Section 35 and MC on the west side of Jail Lake with the following BT's marked.. A Aspen 8" north $56\frac{1}{2}$ west 123 LKS and a aspen 7" south $68\frac{1}{2}$ west 104 LKS.

In 1929, John W. Curo, a registered land surveyor searched for this corner and found no evidence of it or of the bt's.

On January 22, 1985, Walter E. Curo, a registered land surveyor set a point on the ice at a single proportionate location for the section corner between the south ~~1/4~~ CORNER of section 34 and the witness mc. on the east side of Jail Lake, as this point falls in the lake where the water level is at this date we set a 2" x 2" x 36" SQ. Cass county iron pipe monument with aluminum cap for a witness corner on the township line and 140.17 feet west of the section corner and mark bt's as shown on the front.