

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 31, Township 141 N, Range 31 W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9/13/84 found a 2½ inch by 5 foot long galvanized pipe with 3 inch brass cap, stamped as shown, up 18 inches.
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

5½° East declination

SKETCH OF REFERENCE TIES

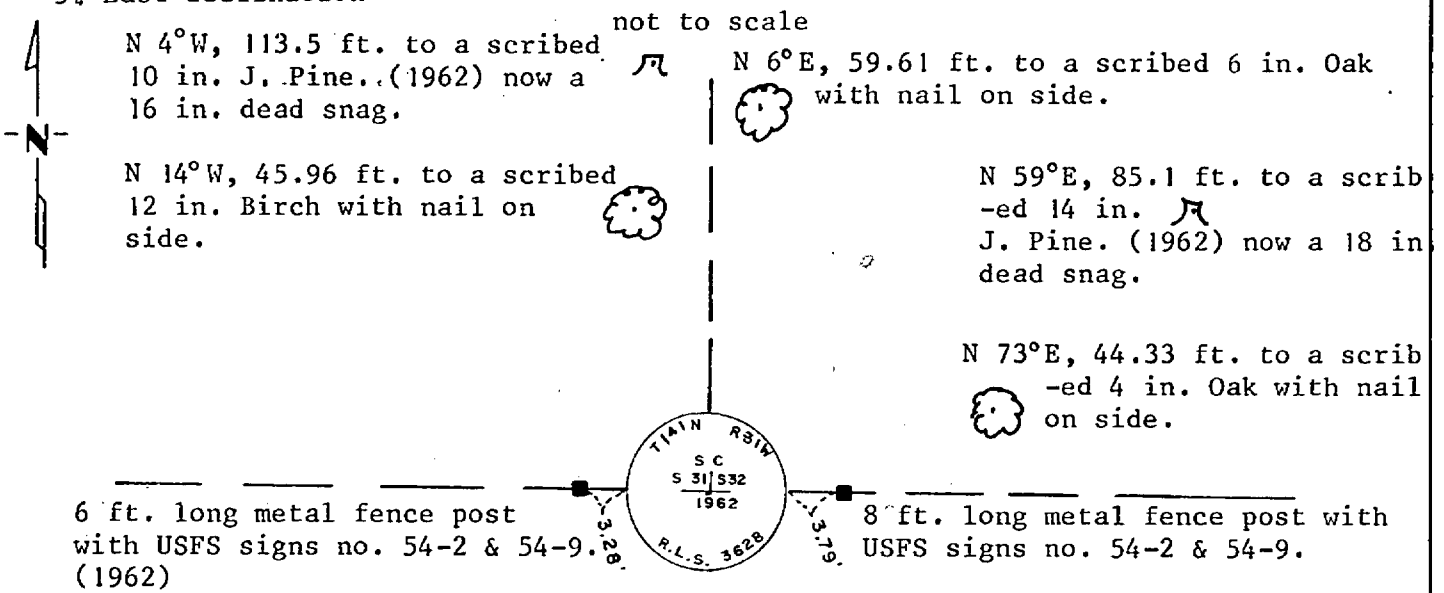

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Anthony E. Kerich 12/12/84
SIGNATURE DATE

Registration No. 12266

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

280499
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 10:20 A.M. on the 25 day of February A.D., 19 85

Register of Deeds Cherline Kayler
By ms Deputy

DOCUMENT NO. 280499

Statement of Evidence:

SOUTHEAST CORNER OF SECTION 31, TOWNSHIP 141 NORTH,
RANGE 31 WEST OF THE 5th PRINCIPAL MERIDIAN.

1864 - The original Public Land Survey was run by Johnson and Thornton. Set a wood post to mark the corner and recorded two bearing trees as accessories:

7" Y. Pine N 63°W 35 links (23.1')
10" Aspen N 35°E 113 links (74.58')

1921 - Elmer B. Horst Deputy Cass County Surveyor subdivided Section 31, found the remains of both Government bearing trees set a 2" x 48" iron from these trees. Record Book C, page 452.

1963 - Peter J. Meyer R.L.S. found a 1-3/4" iron marking the corner no accessories were recovered. Set a 5' long galvanized iron with a 3 inch brass capped monument stamped with appropriate designations and set new corner accessories:

Certificate filed 7/3/63
Document # 159, in book of 10" J. Pine N 04°W 113.5 ft.
Corner Certificates in Cass 14" J. Pine N 59°E 85.1 ft.
County Recorder's office. 72" steel sign post S 83°W 3.2 ft.

1984 - Kerick Surveying, Inc., Bemidji, MN. subdivided Section 31 for the U.S. Forest Service. Found the 3 inch stamped brass capped monument set by Meyer in 1962. Both bearing trees are dead snags. Accepted the monument as a perpetuation on the Horst monument and the original position. Set new corner accessories that appear on this certificate.