


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northwest Corner of Section 8, Township 141N, Range 31W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 8-30-84 found a 2½ inch (O.D.) iron pipe with a 3 inch diameter  
DATE  
brass cap, stamped as shown, up 1.5 feet in stone mound.
  - left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

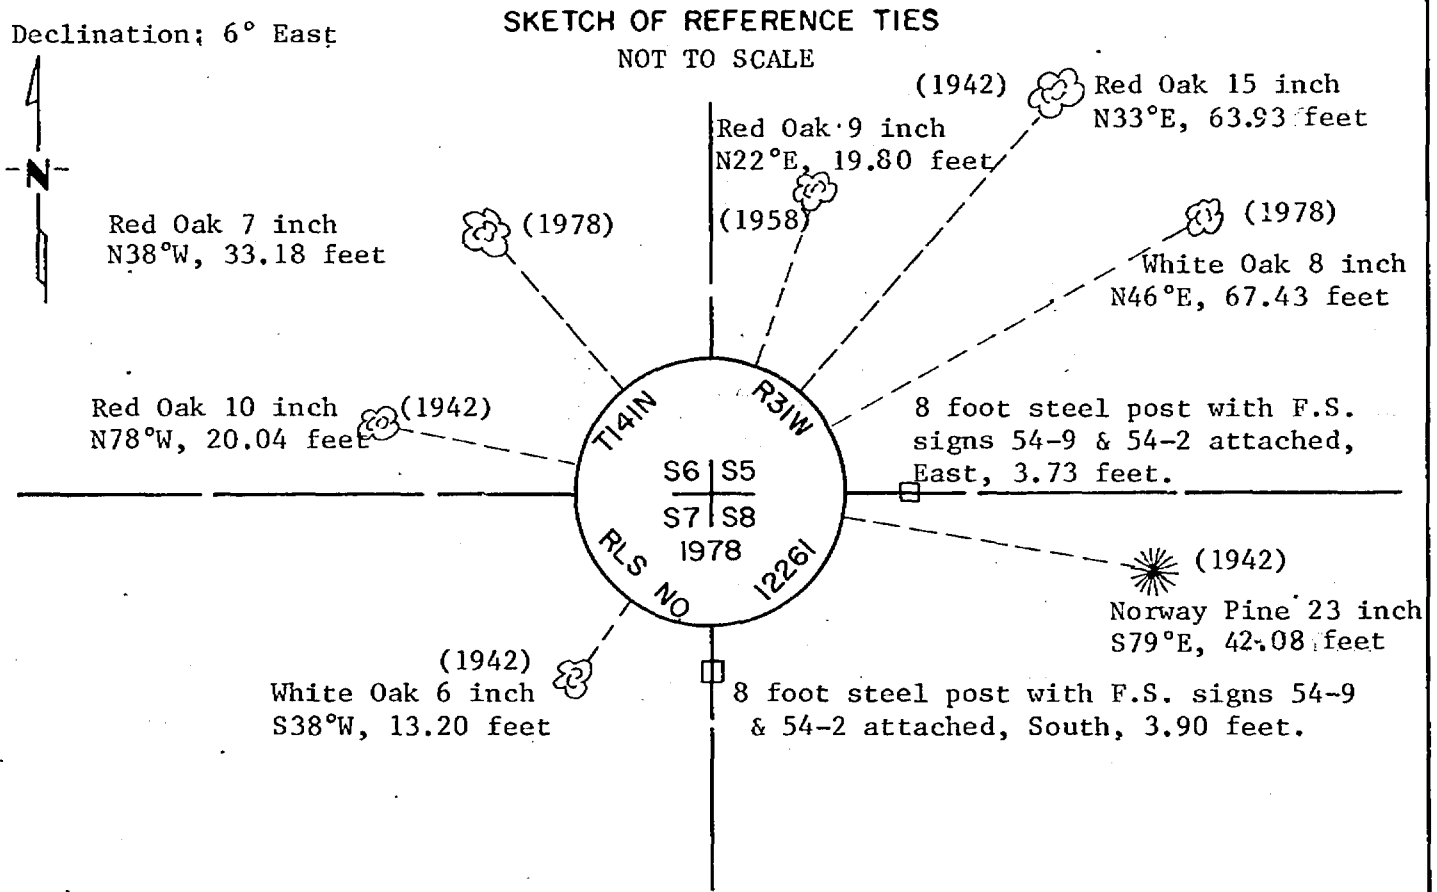

NOTE: All bearing trees are painted red and marked with F.S. sign No. 54-3 with a nail in base, double blazed and scribed.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William J. Korman 2-1-85  
SIGNATURE DATE

Registration No. 6807

- Land Surveyor,  Professional Engineer
- County Surveyor,  County Engineer

280552  
OFFICE OF COUNTY RECORDER

County of Cass  
 I hereby certify that this document was filed in the Co. Recorder's office at 9:00 A.M. on the 27 day of February A.D., 1985  
 County Recorder Claudia Koyler  
 By MS, Deputy

DOCUMENT NO. 280552

Statement of Evidence: Northwest Corner, Section 8, Township 141 North, Range 31 West, 5th Principal Meridian.

1873 P.H. Conger, U.S. Deputy Surveyor, set a post for this Section Corner in his subdivision of the Township between August 5, 1873 and August 30, 1873. As references he scribed:

White Pine	12 inch	N33°E	44 links (29.04 feet)
White Pine	36 inch	N58°W	30 links (19.8 feet)
White Pine	24 inch	S8°W	49 links (32.34 feet)
White Pine	24 inch	S40°E	55 links (36.3 feet)

1915 John Curo, Cass County Surveyor, established corner and set a 2½ inch x 48 inch long galvanized iron pipe with cap. No ties were mentioned on the County Resurvey Plat.

1942 John Curo found monument he previously established in 1915 recorded in County Book "D" page 284. He made references as follows:

Red Oak	12 inch	N27°40'E	63.4 feet
Red Pine	16 inch	S82°30'E	41.6 feet
White Oak	4 inch	S32°10'W	13.1 feet
Red Oak	6 inch	N85°W	20.05 feet

1958 Harold Curo, Cass County Surveyor, found existing 2½ inch x 48 inch galvanized iron pipe with cap marking corner set by John Curo in 1915. He retied corner to existing BT's as follows:

Norway Pine	18 inch	S78°20'E	42.30 feet
Red Oak	6 inch	N18°52'E	19.60 feet
Red Oak	9 inch	N79°55'W	20.0 feet

1978 C. Krause, U.S.F.S., found Curo 2½ inch x 48 inch galvanized iron pipe and two existing BT's.

Norway Pine	23 inch	S80°E	41.55 feet
White Oak	6 inch	S35°W	13.22 feet

To perpetuate corner, Krause replaced monument with a 2½ inch (O.D.) by 5 foot long iron pipe with a 3 inch diameter brass cap and placed Curo's pipe beside the new monument and piled rocks around pipes. He made the following new references:

Red Oak	7 inch	N40°W	33.18 feet
White Oak	7 inch	N41°E	67.43 feet
8 foot steel post		South	4.0 feet

1984 Kelly M. Booge, under F.S. Contract No. 53-6392-4-00996, made a thorough search for physical evidence of this corner and found 1978 monument in good condition and existing bearing trees as shown on sketch. This Certificate was made to update the 1963 Certificate, Document No. 7, in book of Corner Certificates in Cass County Recorder's Office.

Kelly M. Booge is an employee of Okerman Surveying, Inc.