

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter _____ Corner of Section 8, Township 141N, Range 31W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-20-84 placed a 2½ inch (O.D.) x 5 foot long iron pipe with 3 inch
DATE brass cap, stamped as shown, up 1.0 feet.

Declination: 6° East

SKETCH OF REFERENCE TIES NOT TO SCALE

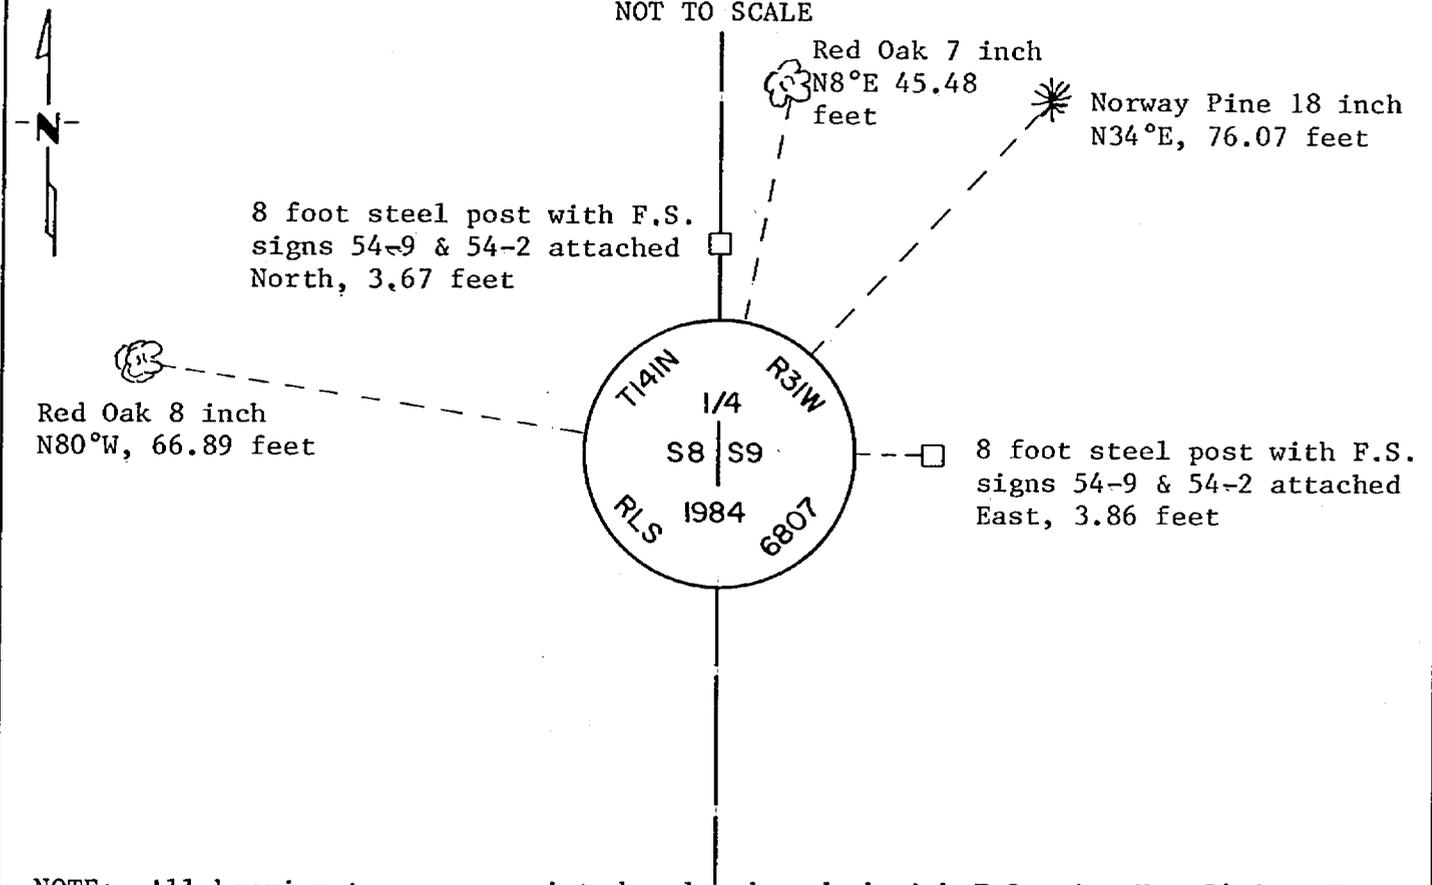

NOTE: All bearing trees are painted red and marked with F.S. sign No. 54-3 with a nail in base, double blazed and scribed.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William D Sherman 2-1-85
SIGNATURE DATE

Registration No. 6807

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

280560
OFFICE OF COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 9:40 A.M. on the 27 day of February A.D., 1985
County Recorder Cloude Kaylor
By MS, Deputy

DOCUMENT NO. 280560

Statement of Evidence: East Quarter Corner of Section 8, Township 141 North,
Range 31 West of the 5th Principal Meridian.

1873 P.H. Conger, U.S. Deputy Surveyor, set a post for this Quarter Corner in his subdivision of the Township between August 5, 1873 and August 30, 1873. As references he scribed:

Aspen	4 inch	N17°W	8 links	(5.28 feet)
Aspen	3 inch	N37°E	17 links	(11.22 feet)

1902 Army Corp of Engineers notes indicate corner searched for but not found. Corner falls in a cutover burnt area.

1962 U.S.F.S. Corner Restoration notes indicate no evidence recovered.

1984 Kelly M. Booge, under F.S. Contract No. 53-6392-4-00996, made a thorough search for physical evidence of this corner on September 13, none was found. He returned on December 20, and searched for evidence on the corner position but found no further evidence. He then set a monument in the lost position, with ties as shown on the sketch, proportioned distance and on a straight line between adjacent corners.

Kelly M. Booge is an employee of Okerman Surveying, Inc.