


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Southeast Corner of Section 8, Township 141N, Range 31W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 9-13-84 found a 2 1/2 inch (O.D.) iron pipe with a 3 inch diameter brass cap, stamped as shown.
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

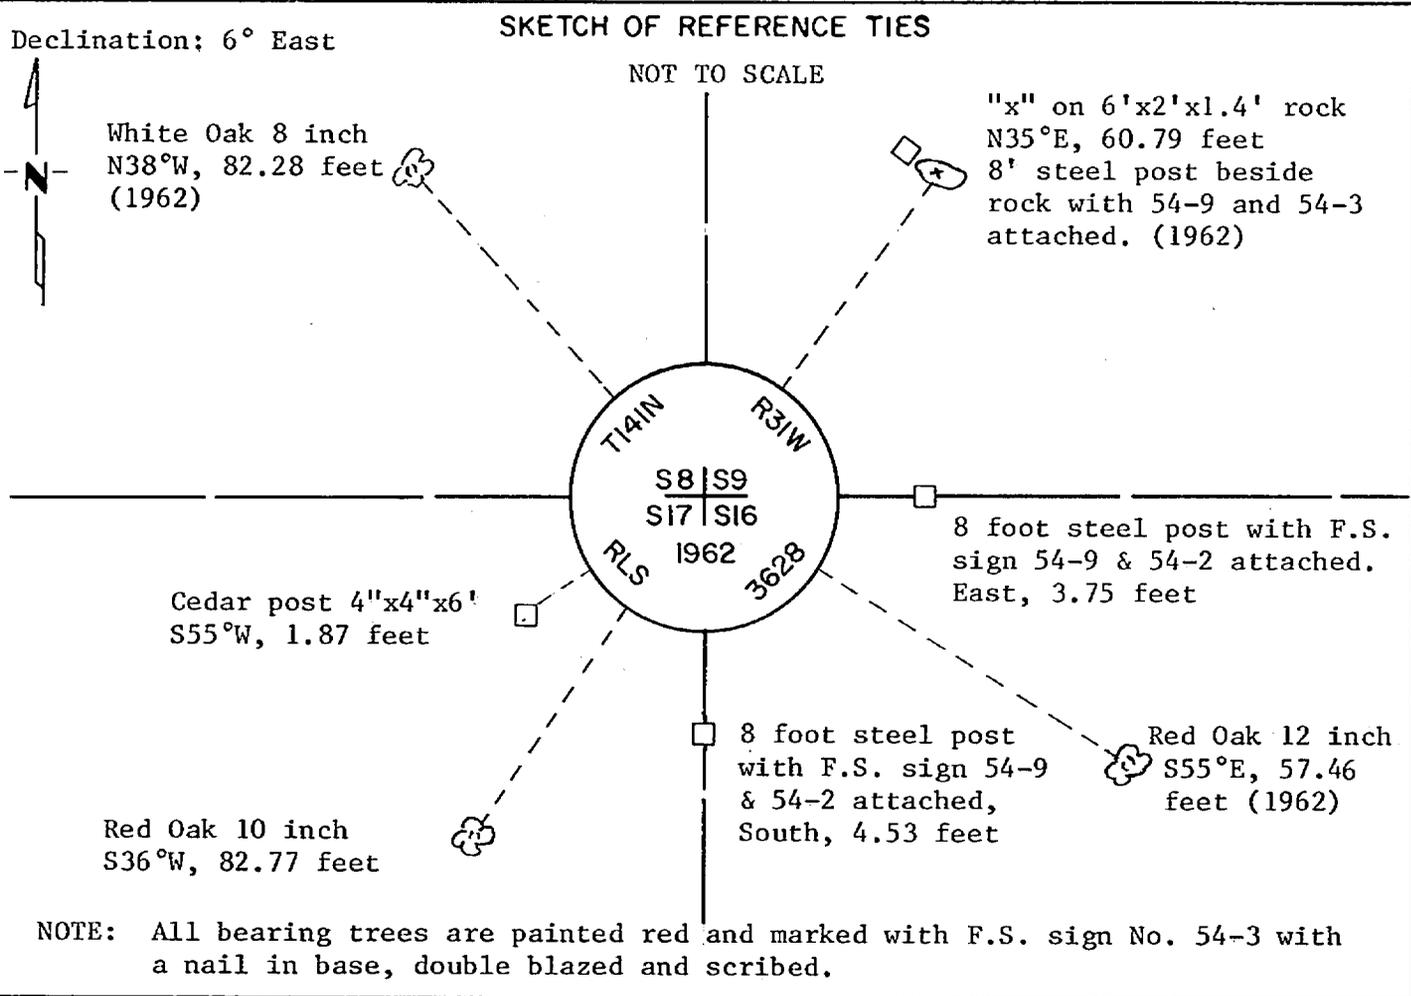

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William D. Sherman 2-1-85
SIGNATURE DATE

Registration No. 6807

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

280567

OFFICE OF COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 10:15 A. on the 27 day of February A.D., 1985

County Recorder Clouline Kaylor
By MS, Deputy

DOCUMENT NO. 280567

Statement of Evidence: Southeast Corner, Section 8, Township 141 North, Range 31 West, 5th Principal Meridian.

1873 P.H. Conger, U.S. Deputy Surveyor, set a post for this Section corner in his subdivision of the Township between August 5, 1873 and August 30, 1873. As references he scribed:

Aspen	3 inch	N48°E	20 links (13.20 feet)
Birch	4 inch	N27°W	5 links (3.30 feet)
Birch	5 inch	S48°W	7 links (4.62 feet)
Aspen	3 inch	S59°E	18 links (11.88 feet)

1902 Army Corp of Engineers notes indicate they found a stake at the corner and two original stumps during their survey for the Leech Lake Reservoir.

Birch (stp)	4 inch	N27°W	5 links
Aspen (stp)	3 inch	S59°E	18 links

1917 E.B. Horst, Cass County Surveyor, found an aspen post marking corner and the burnt and rotting stumps of the original BT's. He replaced the post with a 2 inch x 48 inch iron monument and references as follows:

Aspen	4 inch	N52°E	56.8 feet
Aspen	4 inch	N55°W	51.3 feet
Aspen	4 inch	S47°W	51.5 feet
Birch	5 inch	S55°E	50.0 feet

Above information found in County Book "C" page 123-124.

1962 Peter J. Meyer, R.L.S., U.S.F.S., found iron monument and Southeast bearing tree (stump) set by Horst in 1917. He replaced the found monument with a 2½ inch (O.D.) diameter x 5 foot long iron pipe with a 3 inch diameter brass cap and established new references as follows:

Oak	7 inch	N41°W	82.2 feet
Oak	10 inch	S55°E	58.2 feet
Rock	6.0'x2.0'x1.4' high	N33½°E	60.7 feet to chisled X in top
Cedar post	4"x4"x72"	S55°W	1.87 feet

1984 Kelly M. Booge, under F.S. Contract No. 53-6392-4-00996, made a thorough search for physical evidence of this corner on September 13 and found the monument set in 1962 and the following references:

White Oak	8 inch	N38°W	82.2 feet
Red Oak	12 inch	S55°E	58.2 feet
Rock	6.0'x2.0'x1.4'	N35°E	60.7 feet to chisled X in top
Cedar post	4"x4"x6'	S55°W	1.87 feet

He then rebled existing trees, placed a nail in the base of each tree and made additional ties as shown on the sketch. This Certificate was made to update the 1963 Certificate, Document No. 145, in book of Corner Certificates in Cass County Recorder's Office.

Kelly M. Booge is an employee of Okerman Surveying, Inc.